
RoHS
COMPLIANT

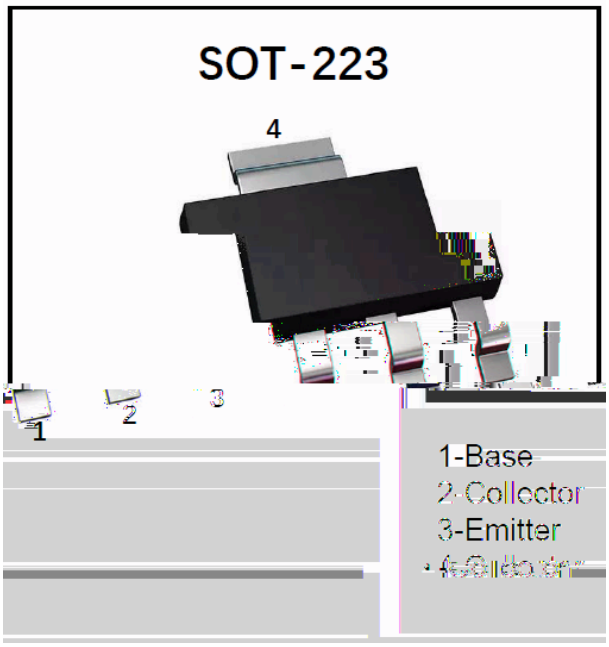


- Epoxy meets UL-94 V-0 flammability rating
- Moisture Sensitivity Level 1
- High power dissipation capability
- Part no. with suffix “Q” means AEC-Q101 qualified

- Linear voltage regulators Low-side switches
- Battery-driven devices MOSFET drivers
- Amplifiers

- : SOT-223
- Tin plated leads, solderable per J-STD-002 and JESD22-B102
- BCP51-16

■

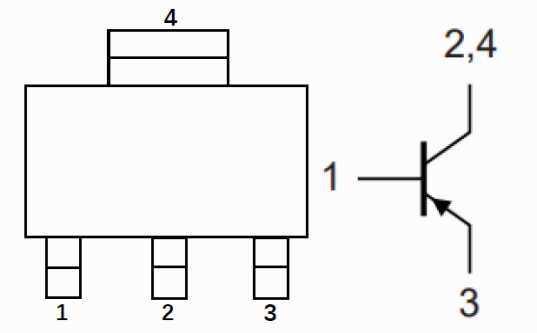

■ (Example)

BCP51-16Q	F2	Approximate 0.11	2500	5000	25000	13” reel

■ (Ta=25 unless otherwise noted)

Collector-Emitter Voltage	V_{CEO}	V	-45
Collector-Base Voltage	V_{CBO}	V	-45
Emitter-Base Voltage	V_{EBO}	V	-5
Collector Current	I_C	A	-1
Power Dissipation (*)	P_D	W	1.5
Thermal Resistance From Junction To Ambient (*)	$R_{\theta JA}$	/W	83.3
Thermal Resistance From Junction To Solder Point	$R_{\theta Js}$	/W	16
Operation Junction Temperature	T_j		-55 to +150
Storage Temperature	T_{stg}		-55 to +150

(*) Device mounted on FR-4 PCB 1.575 x 1.575 x 0.0625 inch; mounting pad for collector =0.93 sq in

■ (Ta=25 unless otherwise noted)

Collector-base breakdown voltage	V_{CBO}	V	I_C= -100μA,I_E=0	-45	-	-
Collector-emitter breakdown voltage	V_{CEO}	V	I_C= -10mA,I_B=0	-45	-	-
Emitter-base breakdown voltage	V_{EBO}	V	I_E= -100μA,I_C=0	-5	-	-
Collector-base cut-off current	I_{CBO}	nA	V_{CB}= -30V,I_E=0	-	-	-100
Collector-emitter cut-off current	I_{EBO}	nA	V_{EB}= -5V,I_C=0	-	-	-100
DC current gain	h_{FE}		V_{CE}= -2V,I_C= -5mA	63	-	-
	h_{FE}		V_{CE}= -2V,I_C= -150mA	100	-	250
	h_{FE}		V_{CE}= -2V,I_C= -500mA	40	-	-
Collector-emitter saturation voltage	$V_{CE(sat)}$	V	I_C= -500mA,I_B= -50mA	-	-	-0.5
Base-Emitter Voltage	V_{BE}	V	V_{CE}= -2V,I_C= -500mA	-	-	-1
Collector-Base Capacitance	C_{ob}	pF	V_{CB}= -10V,I_E=0,f=1MHz	-	15	-
Transition frequency	fT	MHz	V_{CE}= -10V,I_C= -50mA,f=30MHz	100	-	-

■ (Typical)

Fig.1 - Static characteristic

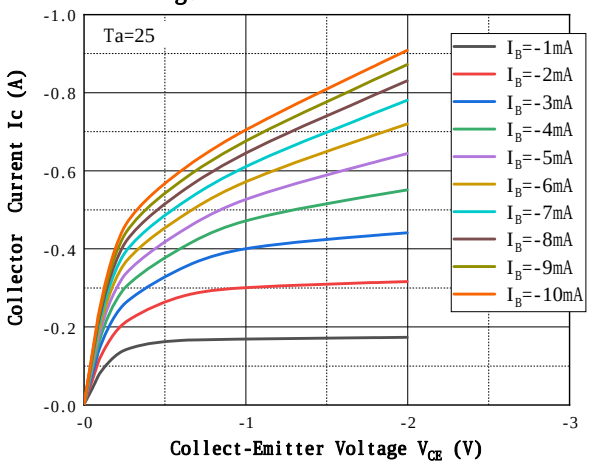


Fig.2 - DC Current Gain

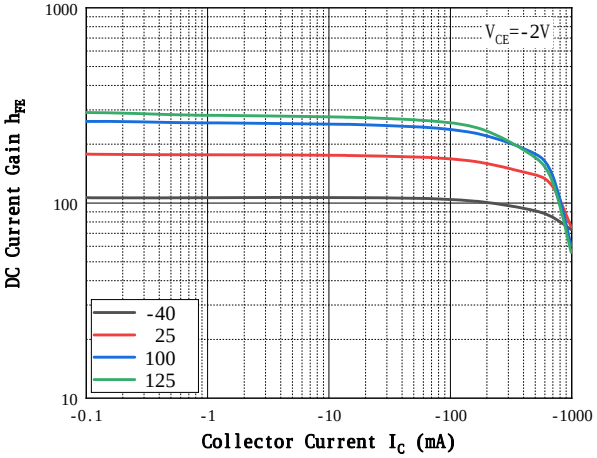


Fig.3 - Collect-Emitter Saturation Voltage

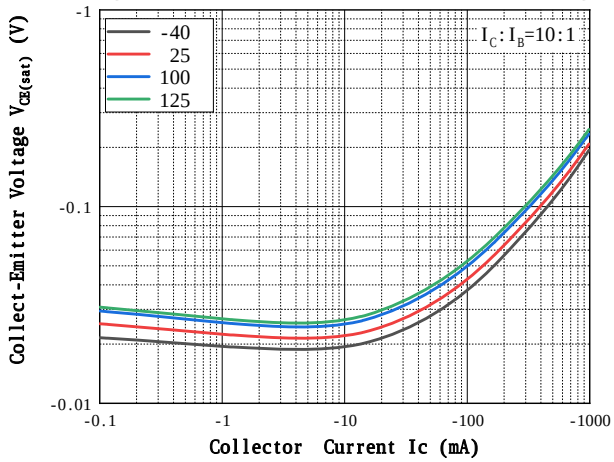


Fig.4 - Base-Emitter Voltage

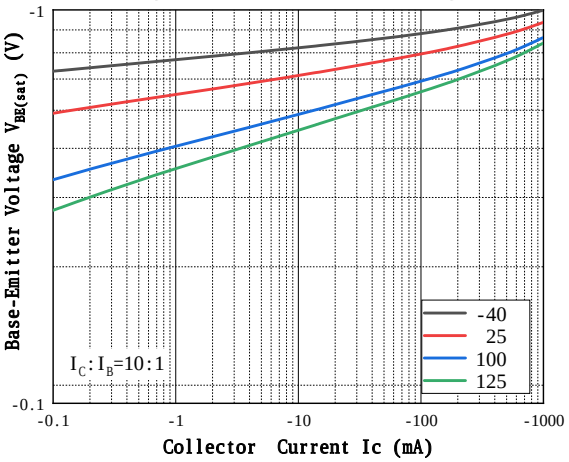


Fig.5 - Base-Emitter On Voltage


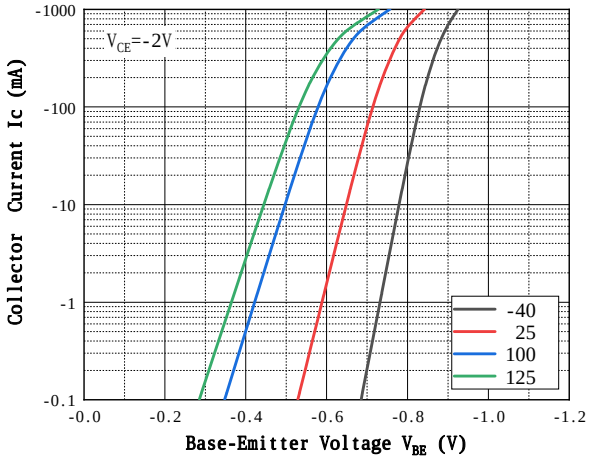


Fig.6 - Cob/Cib—VCB/VEB

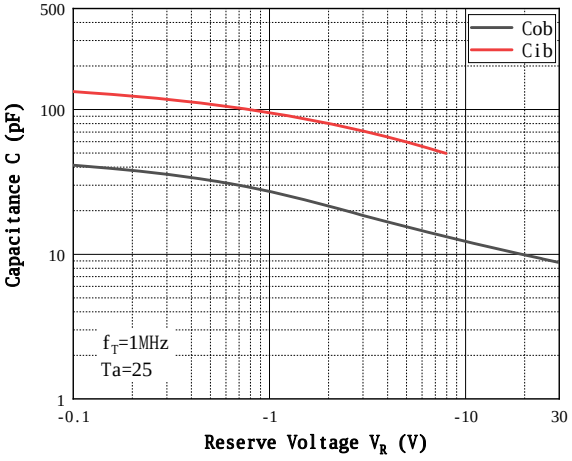

The information presented in this document is for reference only. Yangzhou Yangjie Electronic Technology Co., Ltd. reserves the right to make changes without notice for the specification of the products displayed herein to improve reliability, function or design or otherwise.

The product listed herein is designed to be used with automotive electronics are not designed for use in medical, life-saving, life-sustaining, or military, Yangjie or anyone on its behalf, assumes no responsibility or liability for any damages resulting from such improper use of sale.

This publication supersedes & replaces all information previously supplied. For additional information, please visit our website http:// www.21yangjie.com , or consult your nearest Yangjie's sales office for further assistance.