r

- Moisture sensitivity level 1
- Halogen free and RoHS compliant
- Surface mount package ideally suited for auto matic insertion

Application

- Signal amplification
- Switching circuit

- SOT-723
- Tin plated leads, solderable per J-STD-002 and JESD22-B102

■ (T_a=25 Unless otherwise specified)

	6\PERO	8QLW	&RQGLWLRQV		9DOXH
Device marking code			BC846AM3		1A
			BC846BM3		1B
			BC847AM3		1E
			BC847BM3		1F
			BC847CM3		1G
			BC848AM3		1J
			BC848BM3		1K
			BC848CM3		1L
Collector-base voltage	V_{CBO}	V	BC846	I_C=10uA,I_E=0	80
			BC847		50
			BC848		30
Collector-emitter voltage	V_{CEO}	V	BC846		

RoHS
COMPLIANT

Emitter-base voltage	V_{EBO}	V	I_E=10uA,I_C=0	6
Collector current	I_C	mA		100
Power dissipation	P_D	mW		100
Junction temperature	T_J			-55 to +150
Storage temperature	T_{STG}			-55 to +150

■ (T_a=25 Unless otherwise specified)

Collector-base breakdown voltage	$V_{(BR)CBO}$	V	BC846	I_C=10uA,I_E=0	80		
			BC847		50		
			BC848		30		
Collector-emitter breakdown voltage	$V_{(BR)CEO}$	V	BC846	I_C=10mA,I_B=0	65		
			BC847		45		
			BC848		30		
Emitter-base breakdown voltage	$V_{(BR)EBO}$	V	I_E=10uA,I_C=0		6		
Collector cut-off current	I_{CBO}	uA	BC846	V_{CB}=70V,I_E=0			0.1
			BC847	V_{CB}=50V,I_E=0			0.1
			BC848	V_{CB}=30V,I_E=0			0.1
Emitter-base cutoff current	I_{EBO}	uA	V_{EB}=5V, I_C=0				0.1
DC current gain	h_{FE}		BC846A,847A,848A	V_{CE}=5V, I_C=2mA	110		220
			BC846B,847B,848B		200		450
			BC847C,BC848C		420		800
Collector-emitter saturation voltage	$V_{CE(sat)}$	V	I_C=100mA,I_B=5mA				0.5
Base-emitter saturation voltage	$V_{BE(sat)}$	V	I_C=100mA, I_B= 5mA				1.1
Transition frequency	f_T	MHz	V_{CE}=5V,I_C=10mA,f=100MHz		100		
Collector-base output capacitance	Cob	pF	V_{CB}=10V , f=1MHz				4.5


■


Thermal resistance, junction-to-ambient	$R_{\theta J-A}$(1)	/W	1250
Thermal resistance, junction-to-case	$R_{\theta J-C}$(1)	/W	1000


Note:


1 Thermal resistance from junction to ambient and from junction to case mounted on P.C.B. with 25.4mm*25.4mm copper pad areas


■

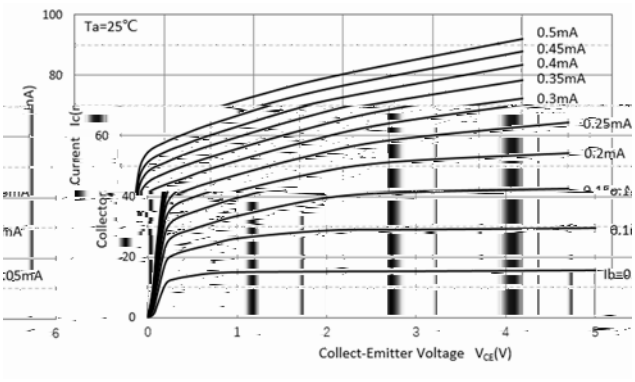


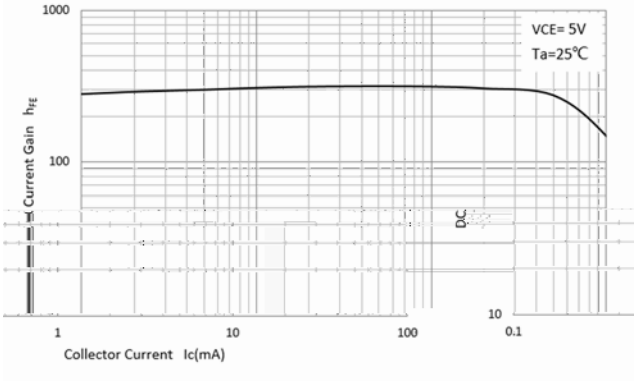


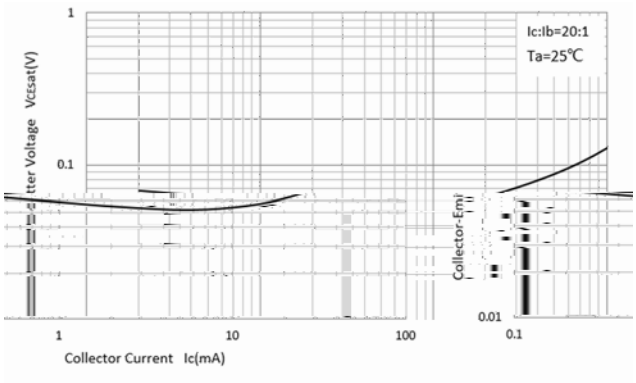

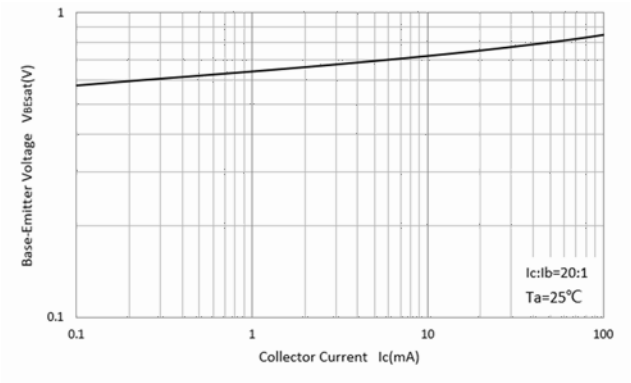

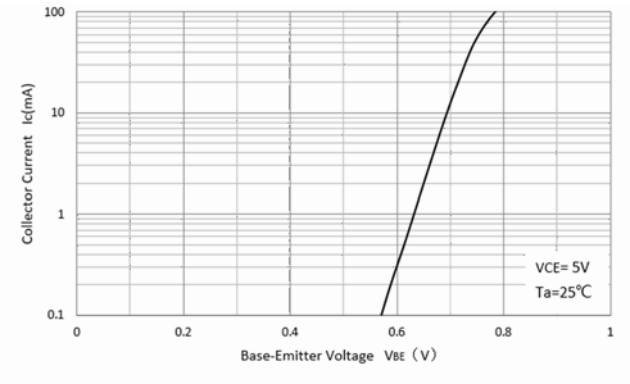
Collector Current Ic(mA)
100
10
1
0.1
0
0.2
0.4
0.6
0.8
1
Base-Emitter Voltage VBE（V）
VCE= 5V
Ta=25℃

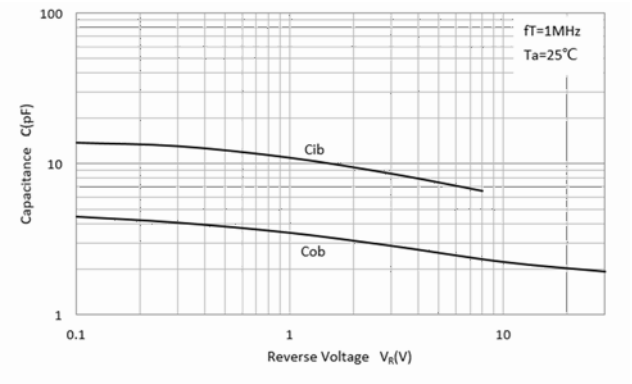

Capacitance C(pF)
100
10
1
0.1
1
10
Reverse Voltage VR(V)
fT=1MHz
Ta=25℃
Cib
Cob

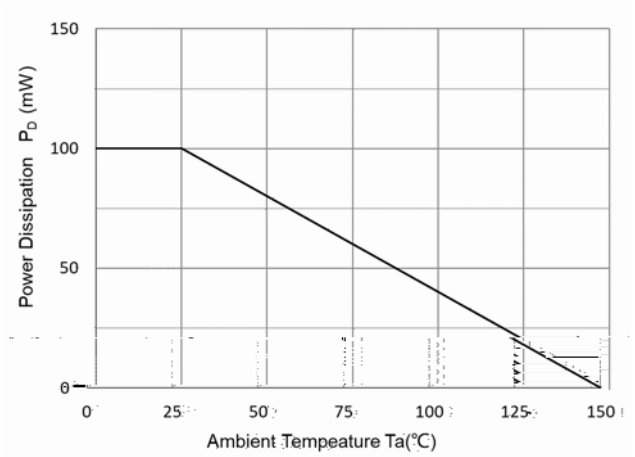
Power Dissipation PD (mW)
150
100
50
0
0
25
50
75
100
125
150
Ambient Tempeature Ta(℃)

■


BC846AM3 THRU BC848CM3	F2	Approximate 0.0013	8000	80000	320000	7" reel

■

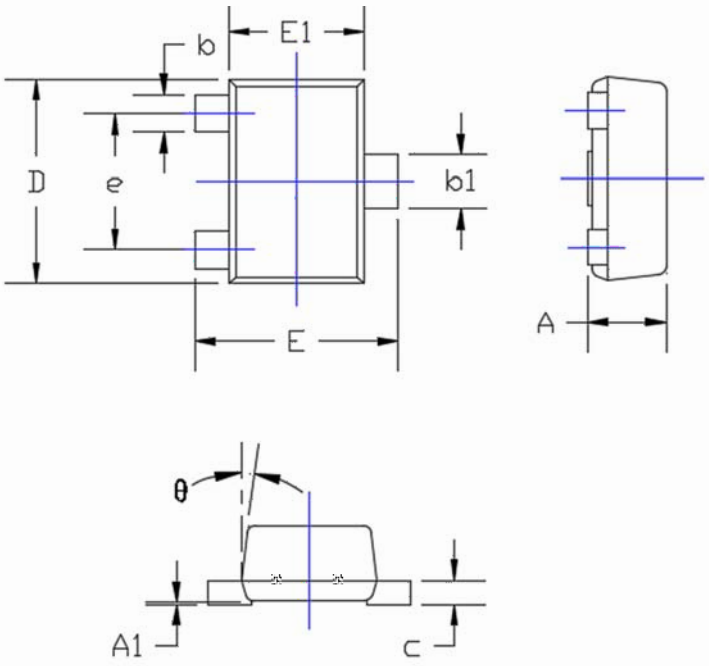

DIMENSIONS				
SYMBOL	INCHES		Millimeter	
	MIN.	MAX.	MIN.	MAX.
A	0.017	0.022	0.430	0.550
A1	0.000	0.002	0.000	0.050
b	0.007	0.011	0.170	0.270
b1	0.011	0.015	0.270	0.370
c	0.003	0.008	0.080	0.200
D	0.045	0.049	1.150	1.250
E	0.045	0.049	1.150	1.250
E1	0.030	0.033	0.750	0.850
e	0.031TYP.		0.800TYP.	
θ	7°REF.		7°REF.	

■

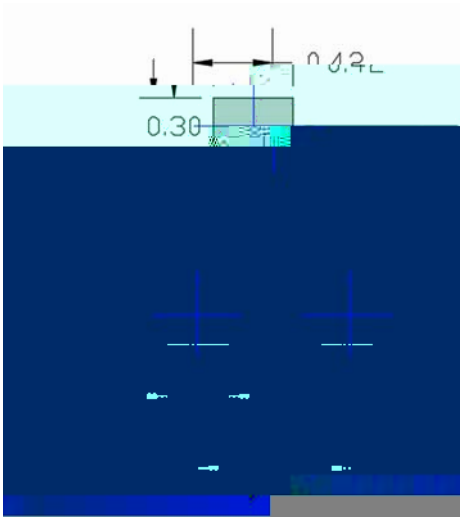

The information presented in this document is for reference only. Yangzhou Yangjie Electronic Technology Co., Ltd. reserves the right to make changes without notice for the specification of the products displayed herein to improve reliability, function, or design or otherwise.

The product listed herein is designed to be used with ordinary electronic equipment or devices, and not designed to be used with equipment or devices which require high level of reliability and the malfunction of with would directly endanger human life (such as medical instruments, transportation equipment, aerospace machinery, nuclear-reactor controllers, fuel controllers and other safety devices), Yangjie or anyone on its behalf, assumes no responsibility or liability for any damages resulting from such improper use of sale.

This publication supersedes & replaces all information previously supplied. For additional information, please visit our website http:// www.21yangjie.com , or consult your nearest Yangjie's sales office for further assistance.