Low VF Bridge Rectifiers

Features

- UL recognition, file #E230084
- Glass passivated chip junction
- Thin single in-line package
- High surge current capability
- Solder dip 275 °C max. 7 s, per JESD 22-B106

Typical Applications

General purpose use in AC/DC bridge full wave rectification for switching power supply, home appliances, office equipment, industrial automation applications.


Mechanical Data


- **Package**: 6KBJ
  Molding compound meets UL 94 V-0 flammability rating, RoHS-compliant
- **Terminals**: Tin plated leads, solderable per J-STD-002 and JESD22-B102
- **Polarity:** As marked on body

■Maximum Ratings (T_a=25 Unless otherwise specified


PARAMETER		SYMBOL	UNIT	GBJL2508
Device marking code				GBJL2508
Maximum Repetitive Peak Reverse Voltage		V_{RRM}	V	800
Maximum RMS Voltage		V_{RMS}	V	560
Maximum DC blocking Voltage		V_{DC}	V	800
Average rectified output current @60Hz sine wave, R-load	With heatsink T_C =104	I_O	A	25.0
	Without heatsink T_a =25			3.5
Forward Surge Current (Non-repetitive) @60Hz Half-sine wave,1 cycle, Tj=25		I_{FSM}	A	420
Forward Surge Current (Non-repetitive) @1ms, square wave, 1 cycle, Tj=25				840
Current squared time @1ms≤t≤8.3ms Tj=25 , Rating of per diode		I^2t	A^2s	732
Storage temperature		T_{stg}		-55 ~ +150
Junction temperature		T_j		-55 ~ +150

GBJL2508

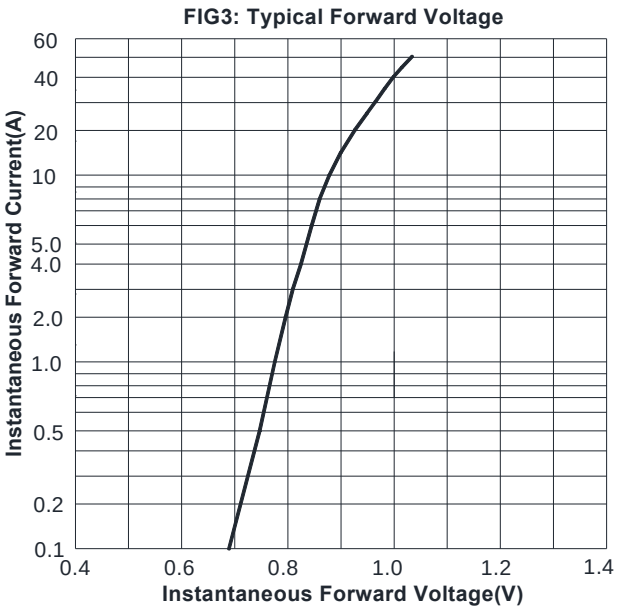

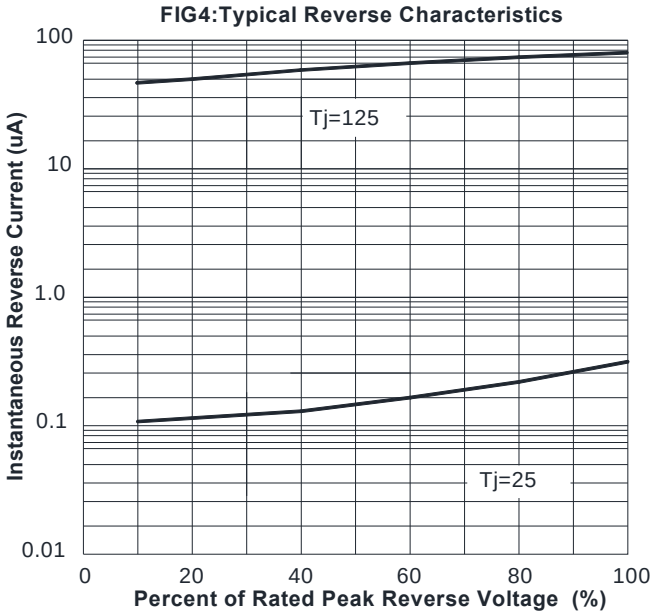

■ Outline Dimensions

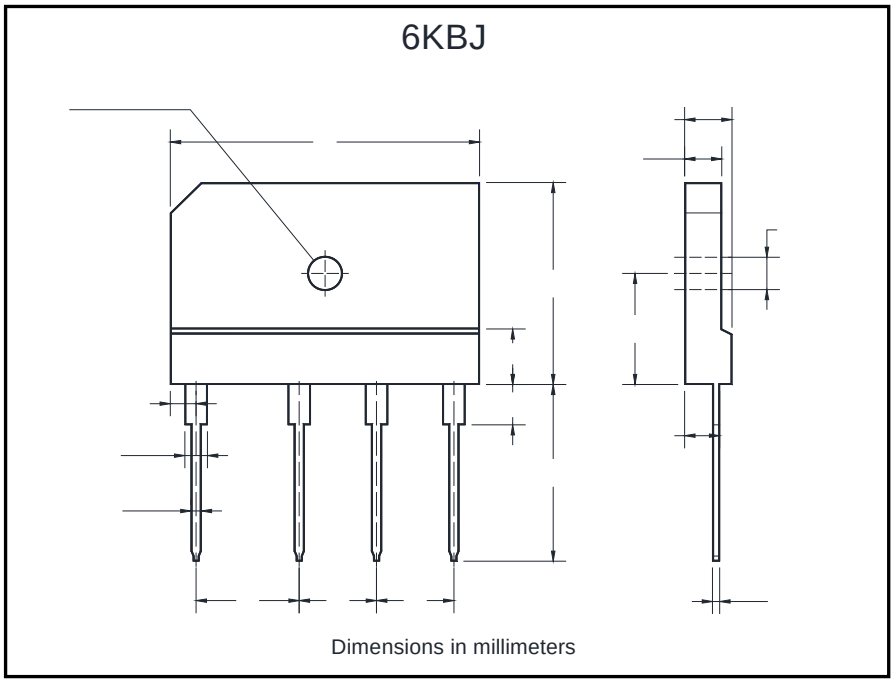

6KBJ		
Dim	Min	Max
A	29.7	30.3
B	19.7	20.3
C	17.0	18.0
D	4.8	5.8
E	3.8	4.2
F	7.3	7.7
G	9.8	10.2
H	0.9	1.1
I	2.0	2.4
J	2.3	2.7
K	3.4	3.8
L	4.4	4.8
M	10.8	11.2
N	3.1	3.7
O	3.1	3.4
P	0.6	0.8

Disclaimer

The information presented in this document is for reference only. Yangzhou Yangjie Electronic Technology Co., Ltd. reserves the right to make changes without notice for the specification of the products displayed herein to improve reliability, function or design or otherwise.

The product listed herein is designed to be used with ordinary electronic equipment or devices, and not designed to be used with equipment or devices which require high level of reliability and the malfunction of with would directly endanger human life (such as medical instruments, transportation equipment, aerospace machinery, nuclear-reactor controllers, fuel controllers and other safety devices), Yangjie or anyone on its behalf, assumes no responsibility or liability for any damages resulting from such improper use of sale.

This publication supersedes & replaces all information previously supplied. For additional information, please visit our website http:// www.21yangjie.com , or consult your nearest Yangjie's sales office for further assistance.