ESD Protection Diode

Features

- For sensitive ESD protection
- Low leakage
- Uni-directional ESD protection of one line
- Epoxy meets UL 94 V-0 flammability rating
- Moisture Sensitivity Level 1

Mechanical Data

- **Package**: SOD523
- **Terminals**: Tin plated leads, solderable per J-STD-002 and JESD22-B102
- **Polarity:** Cathode line denotes the cathode end
- **Marking:** ZE

■Maximum Ratings

PARAMETER	SYMBOL	LIMITS	UNIT
Operating Junction & Storage Temperature	T_J&T_{STG}	-45 to +125	
IEC61000-4-2(ESD)Air	V_{ESD}	±30	KV
IEC61000-4-2(ESD)Contact		±30	KV
JESD22-A114-B(ESD)Machine		±0.4	KV
JESD22-A114-B(ESD)Human Body		±16	KV
Peak Pulse Current	I_{PP} [1]	16	A

(1).Non-repetitive current pulse 8/20

■Electrical Characteristics T_a=25 Unless otherwise specified

PARAMETER	Symbol	UNIT	Conditions	Min	Typ	Max
Reverse Standoff Voltage	V_{RWM} [1]	V				3.3
Reverse Leakage Current	I_R	uA	V_{RWM}=3.3V			0.08
Breakdown Voltage	$V_{(BR)}$	V	I_T=1mA	5		
Clamping Voltage	V_C [2]	V	I_{PP}=5A tp=8/20us			9.5
Clamping Voltage	V_C [2]	V	I_{PP}=16A tp=8/20us			14
Forward voltage	V_F	V	I_F=10mA			0.9
Peak Power Dissipation	P_{Pk}	W	tp=8/20us			224
Junction Capacitance	C_J	pF	V_R=0V,f=1MHz		120	


(1).Other voltages available upon request.


(2).Non-repetitive current pulse 8/20μs exponential decay waveform according to IEC61000-4-5

■Ordering Information (Example)

PREFERED P/N	PACKING CODE	UNIT WEIGHT(g)	MINIMUM PACKAGE(pcs)	INNER BOX QUANTITY(pcs)	OUTER CARTON QUANTITY(pcs)	DELIVERY MODE
ESD3V3D5	F2	Approximate 0.002	8000	80000	320000	7” reel

■ Characteristics (Typical)

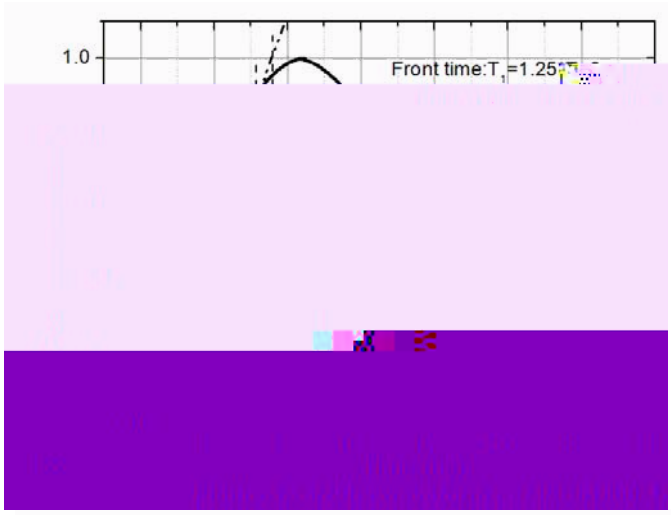

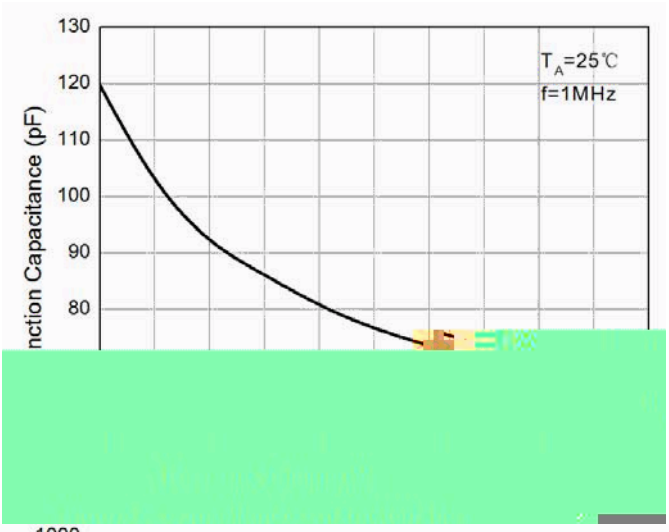



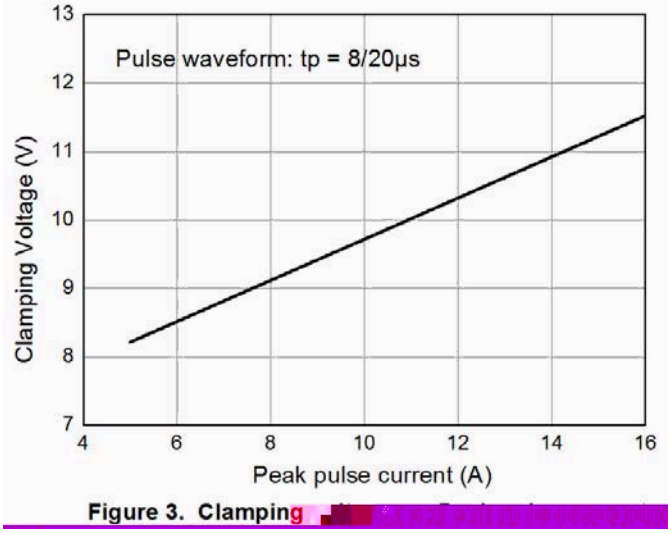



Figure 3. Clamping

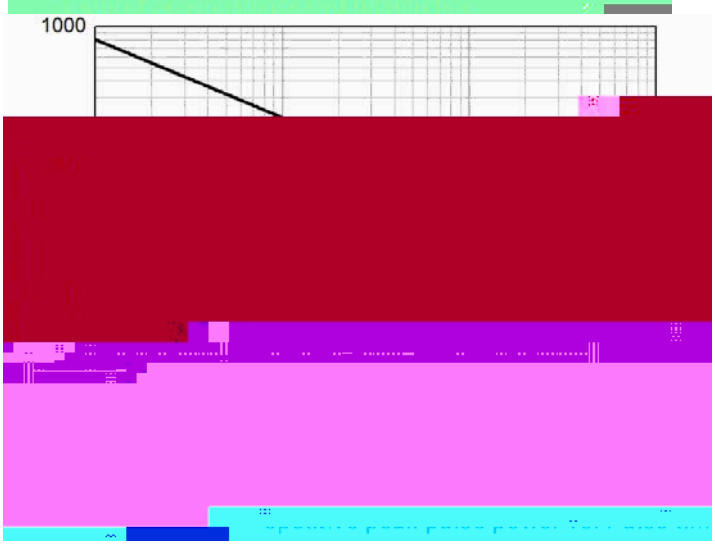

■ Outline Dimensions

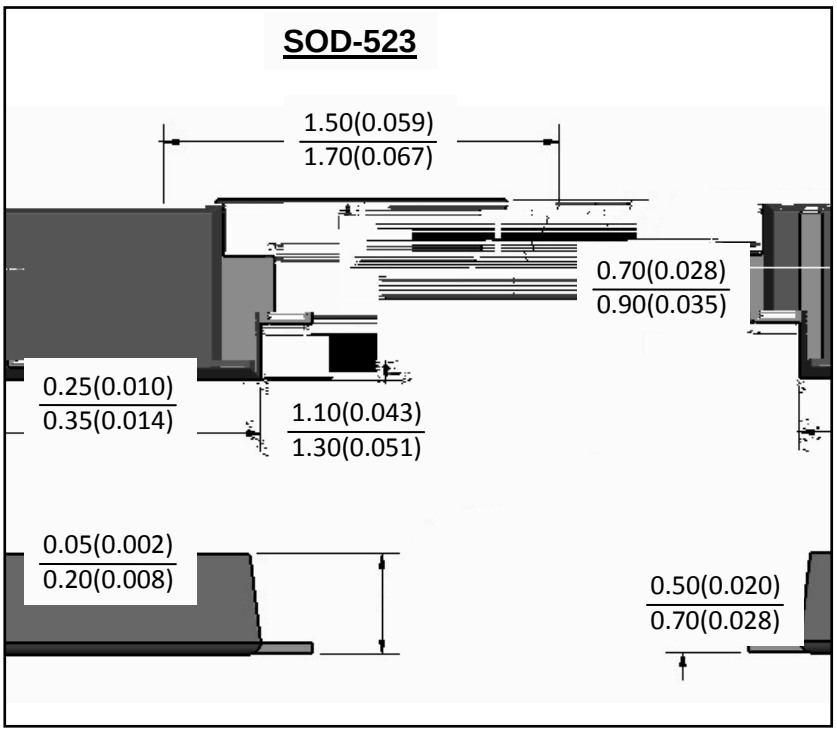

■ Soldering Footprint

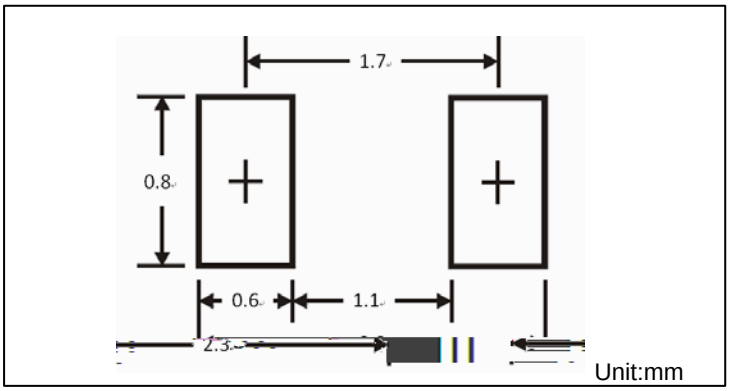

Disclaimer

The information presented in this document is for reference only. Yangzhou Yangjie Electronic Technology Co., Ltd. reserves the right to make changes without notice for the specification of the products displayed herein to improve reliability, function or design or otherwise.

The product listed herein is designed to be used with ordinary electronic equipment or devices, and not designed to be used with equipment or devices which require high level of reliability and the malfunction of with would directly endanger human life (such as medical instruments, transportation equipment, aerospace machinery, nuclear-reactor controllers, fuel controllers and other safety devices), Yangjie or anyone on its behalf, assumes no responsibility or liability for any damages resulting from such improper use of sale.

This publication supersedes & replaces all information previously supplied. For additional information, please visit our website http:// www.21yangjie.com , or consult your nearest Yangjie's sales office for further assistance.