
RoHS COMPLIANT

1-Line, Bi-directional, Transient V[illegible]

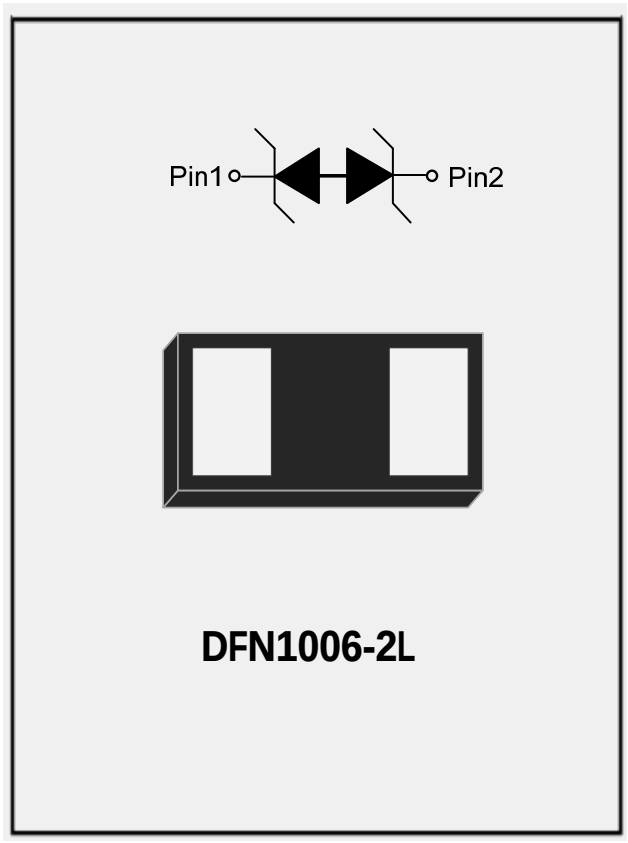


Feat[illegible]

Appl[illegible]

Mech[illegible]



Definitions of electrical characteristics

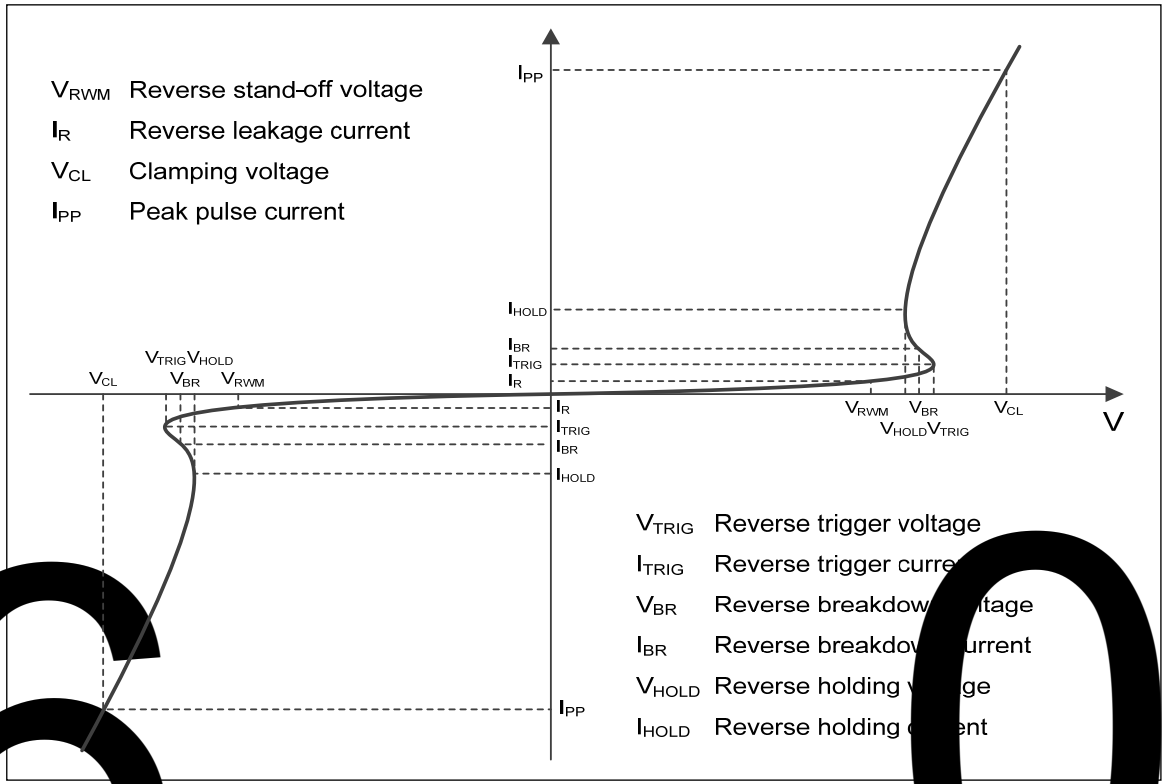

Maximum Ratings

PARAMETER	SYMBOL	LIMITS	UNIT

Characteristics

Fig.1 8/20μs waveform per IEC61000-4-5

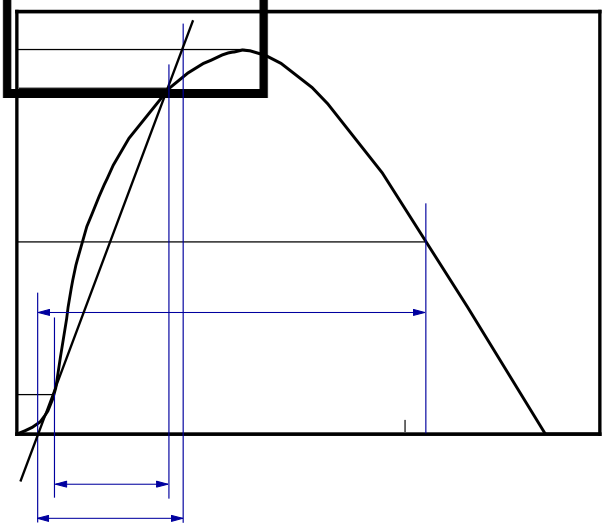


Fig.7 ESD clamping
(+8kV contact discharge per IEC61000-4-2)

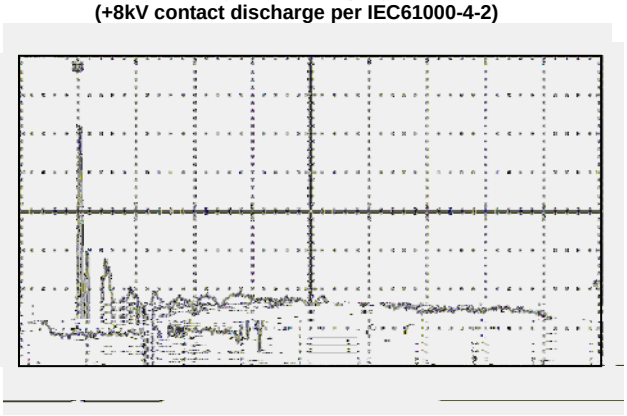


Fig.8 ESD clamping
(-8kV contact discharge per IEC61000-4-2)



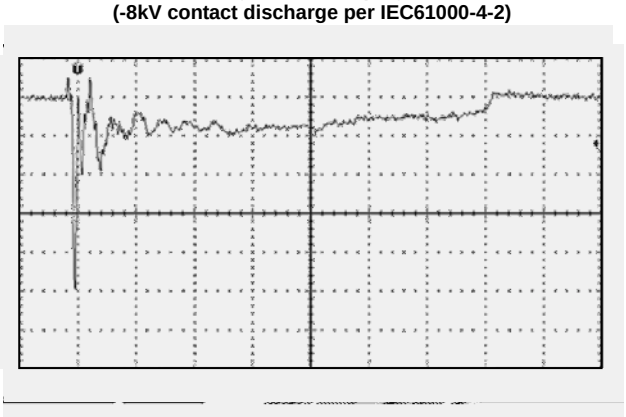


Fig.9 TLP Measurement

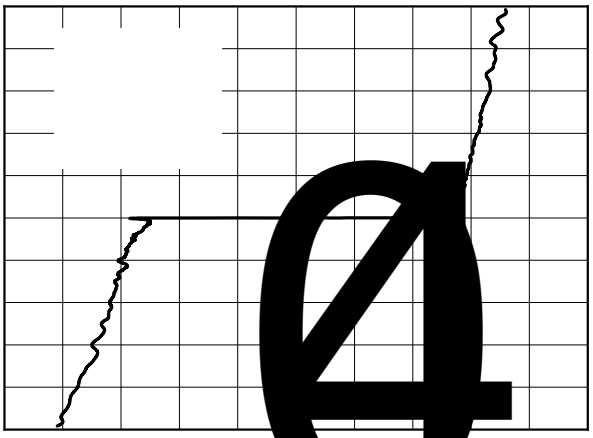


Outline Dimensions

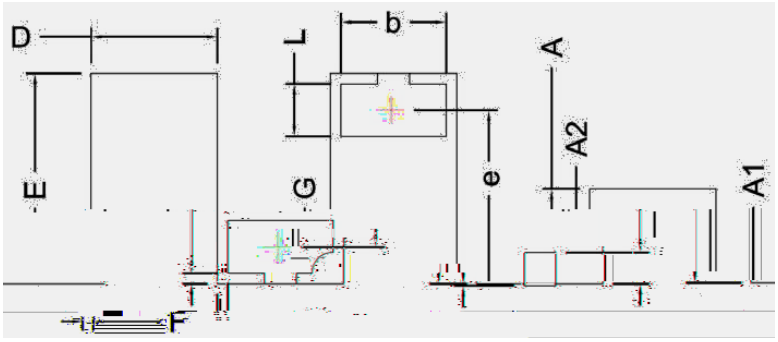

SYMBOL	MILLIMETER		
	MIN	NOM	MAX
D			
E			
A			
A1			
A2			
F			
G			
L			
b			
e			

■ **Recommended PCB Layout**

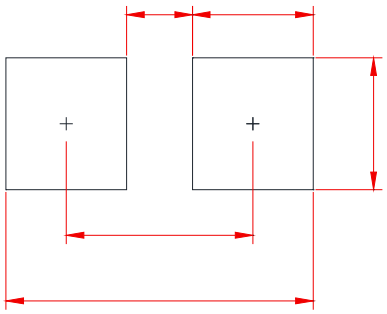

Disclaimer