
1-Line, Bi-directional, Transient Voltage Suppressor

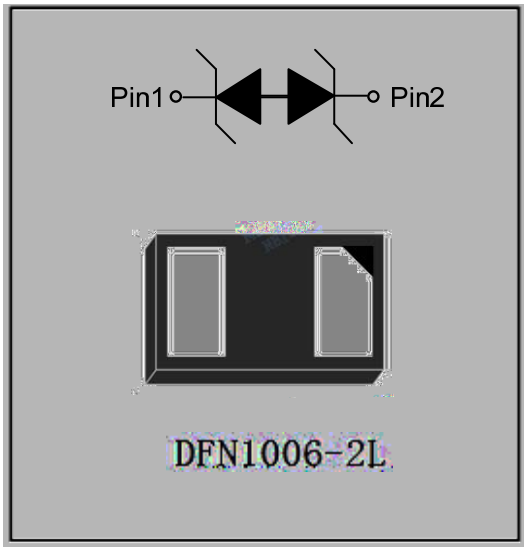


Features

- Stand-off voltage: ±5V Max
- Transient protection for each line according to
IEC61000-4-2(ESD): ±30kV (contact)
IEC61000-4-4 (EFT): 40A (5/50ns)
IEC61000-4-5(surge): 8A (8/20μs)
- Ultra-low capacitance: C_J = 10pF typ
- Low leakage current
- Low clamping voltage: V_{CL} =10.0V typ. @ I_{PP} = 16A (TLP)
- Solid-state silicon technology

Mechanical Data

- **Package**: DFN1006-2L
- **Terminals**: Tin plated leads, solderable per J-STD-002 and JESD22-B102
- **Polarity:** No marking on bi-directional types
- **Marking:** 5A

■Definitions of electrical characteristics

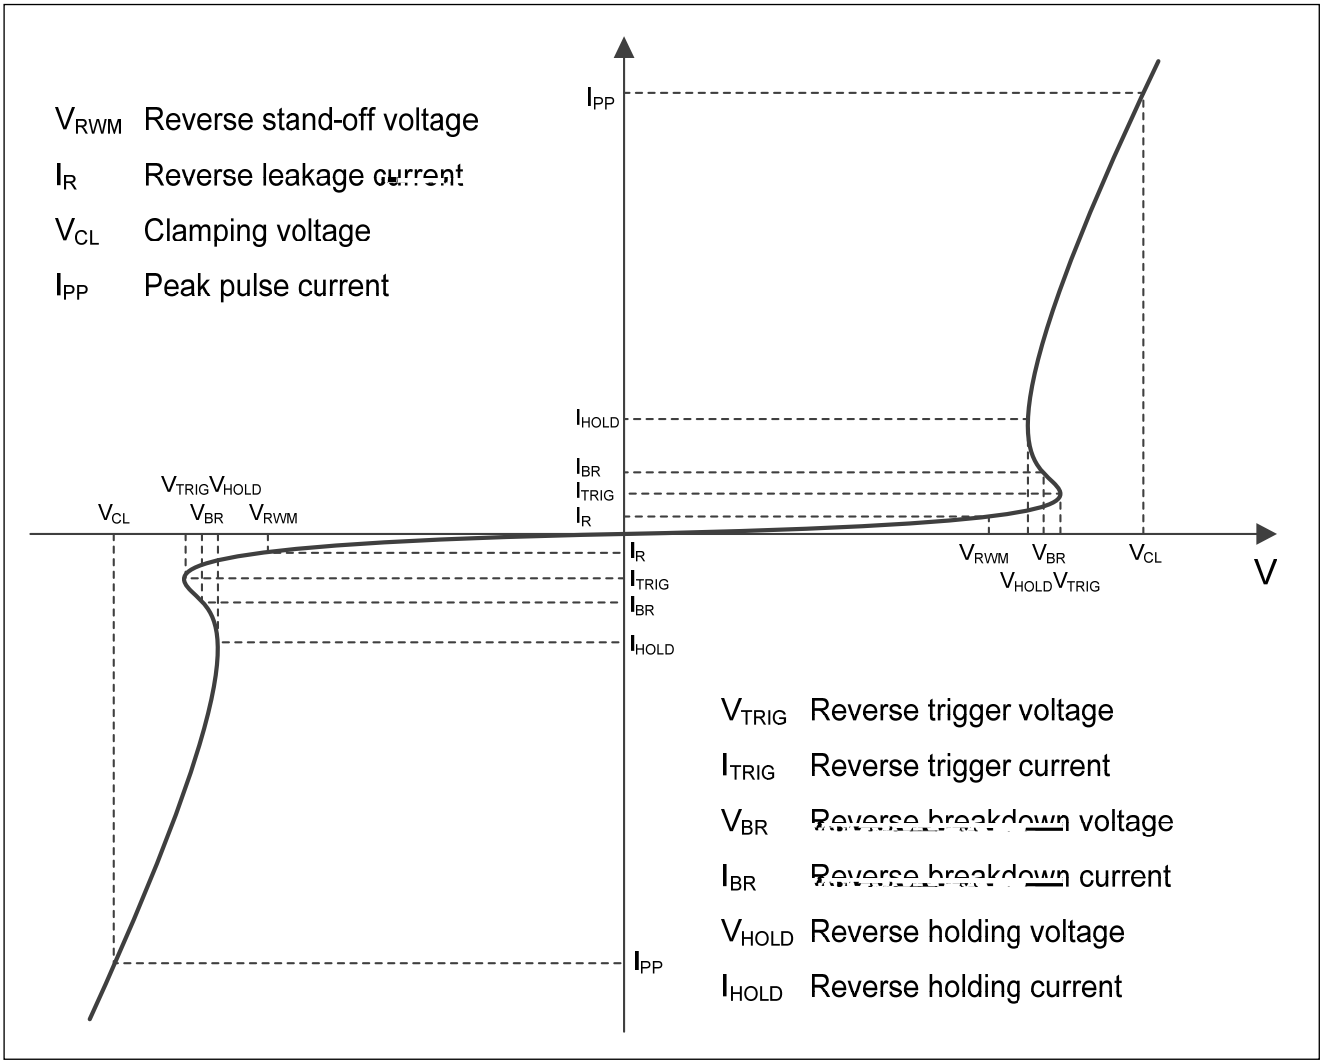

■Maximum Ratings

PARAMETER	SYMBOL	Rating	UNIT
Peak pulse power (t_p = 8/20μs)	P_{pk}	96	W
Peak pulse current (t_p = 8/20μs)	I_{PP}	8	A
ESD according to IEC61000-4-2 air discharge	V_{ESD}	±30	KV
ESD according to IEC61000-4-2 contact discharge		±30	KV
Junction temperature	T_J	125	°C
Operating temperature	T_{OP}	-40~85	°C
Storage temperature	T_{STG}	-55~150	°C

■Electrical Characteristics T_a=25 Unless otherwise specified


PARAMETER	Symbol	UNIT	Conditions	Min	Typ	Max
Reverse maximum working voltage	V_{RWM}	V				±5.0
Reverse leakage current	I_R	nA	V_{RWM} =5V			100
Reverse breakdown voltage	V_{BR}	V	I_{BR} = 1mA	5.3	6	
Reverse holding voltage	V_{HOLD}	V	I_{HOLD} = 50mA	5.3	6	
Clamping voltage *1)*	V_{CL}	V	I_{PP} = 16A, t_p = 100ns		10.0	
Dynamic resistance *1)*	R_{DYN}	Ω			0.2	
Clamping voltage *2)*	V_{CL}	V	V_{ESD} = 8kV		10.0	
Clamping voltage *3)*	V_{CL}	V	I_{PP} = 1A, t_p = 8/20μs			8
		V	I_{PP} = 8A, t_p = 8/20μs			12
Junction capacitance	C_J	pF	V_R = 0V, f = 1MHz		10	13
		pF	V_R = 2.5V, f = 1MHz		8	11


(1). TLP parameter: Z_0 = 50Ω, t_p = 100ns, t_r = 2ns, averaging window from 60ns to 80ns. R_{DYN} is calculated from 4A to 16A.
(2). Contact discharge mode, according to IEC61000-4-2.
(3). Non-repetitive current pulse, according to IEC61000-4-5.


■Ordering Information (Example)

PREFERED P/N	UNIT WEIGHT(mg)	MINIMUM PACKAGE(pcs)	INNER BOX QUANTITY(pcs)	OUTER CARTON QUANTITY(pcs)	DELIVERY MODE
ESD5V0LB	Approximate 0.9	10000	100000	400000	Tape & reel


■ Characteristics (Typical)

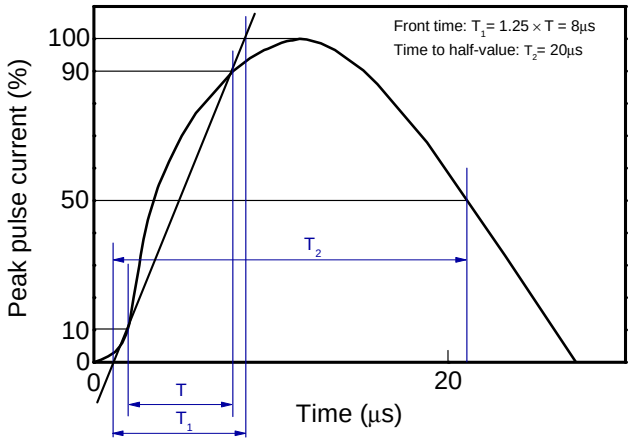

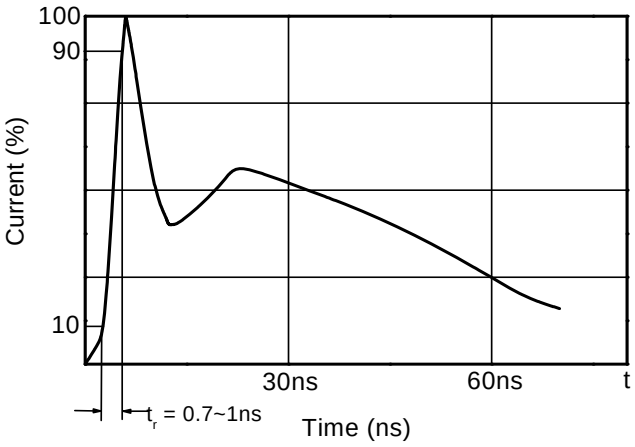

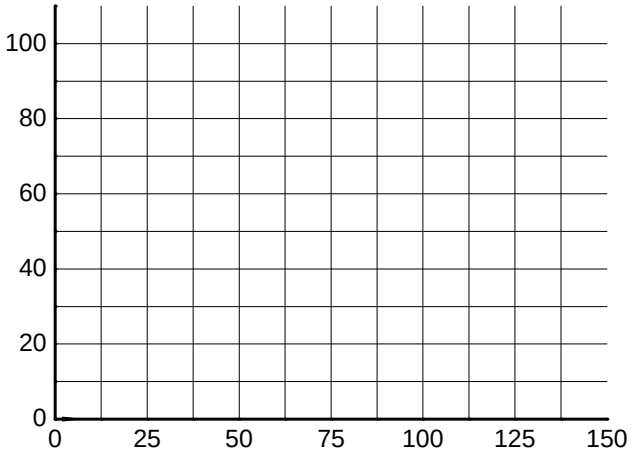

■ Recommend land pattern (Unit:mm)

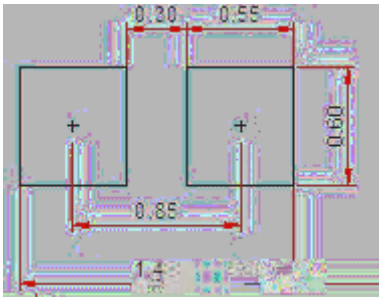

Notes:

This recommended land pattern is for reference purposes only. Please consult your manufacturing group to ensure your PCB design guidelines are met

Disclaimer

The information presented in this docu Ö # r ضـ ^ ¨