
2-Line, Bi-directional, Transient Voltage Suppressor

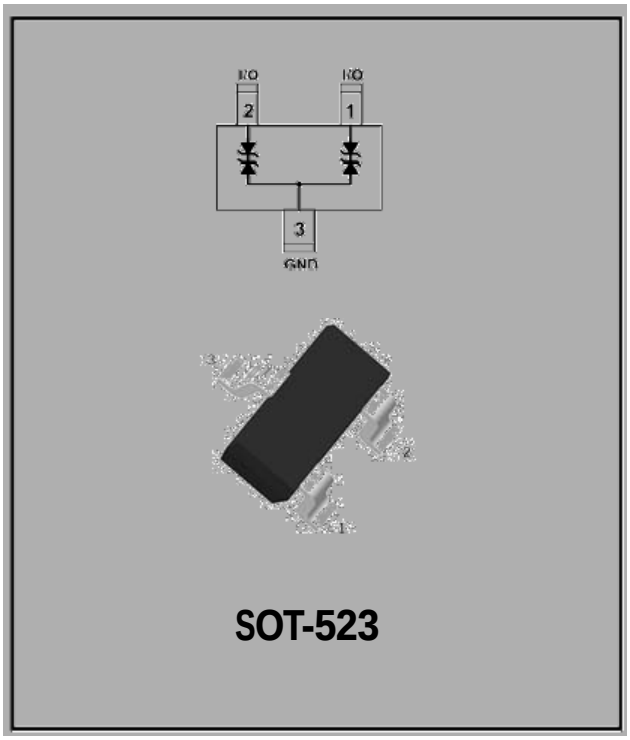


Features


±

Applications

Mechanical Data

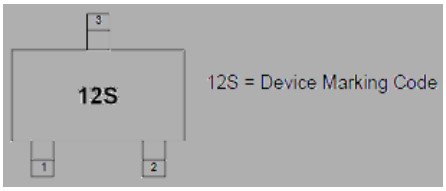

Definitions of electrical characteristics

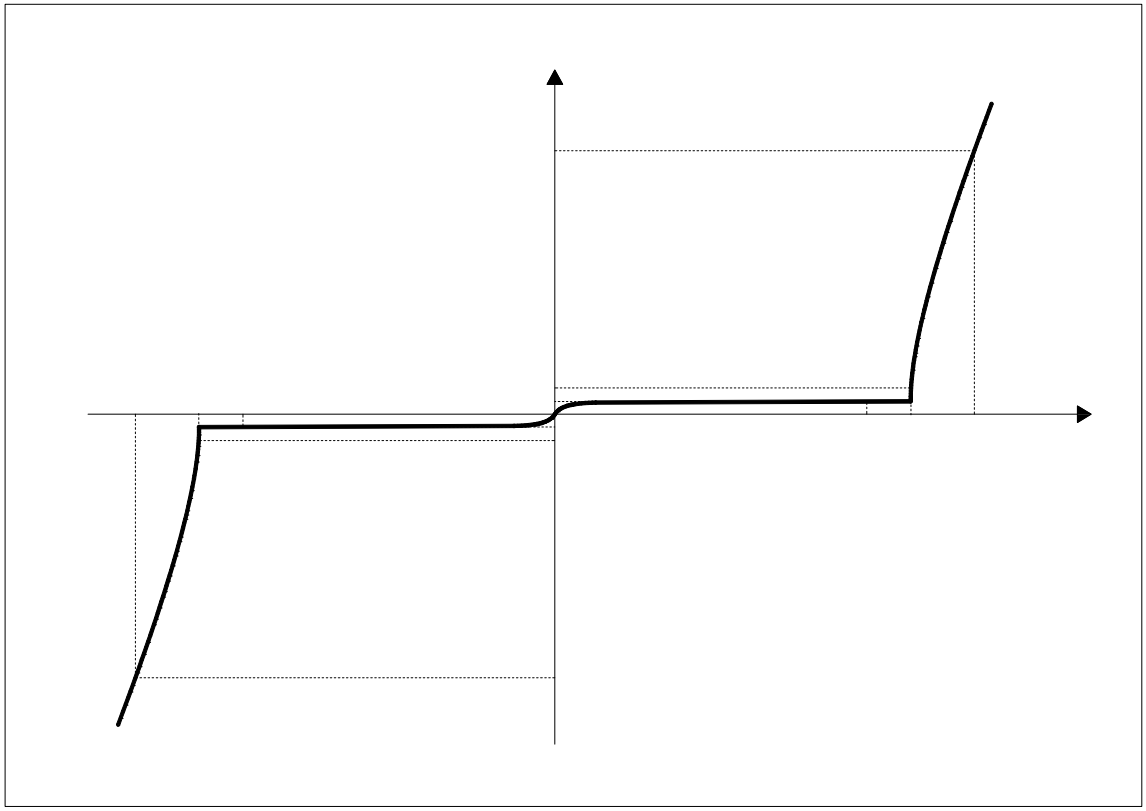

Maximum Ratings

PARAMETER	SYMBOL	LIMITS

Characteristics (Typical)

Fig.1 8/20μs waveform per IEC61000-4-5



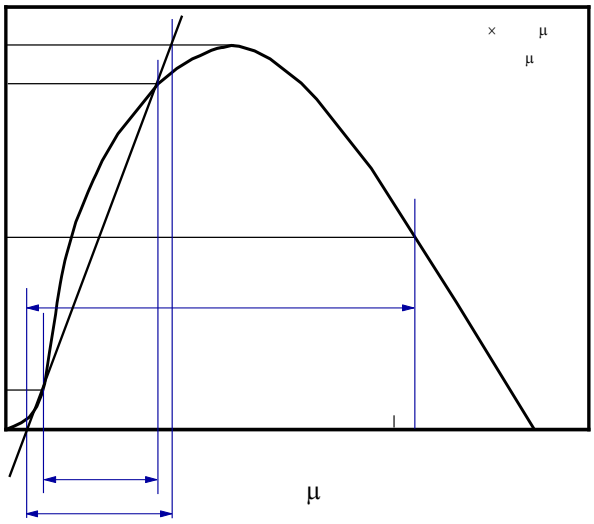



Fig.7 ESD clamping - I/O to GND
(+8kV contact discharge per IEC61000-4-2

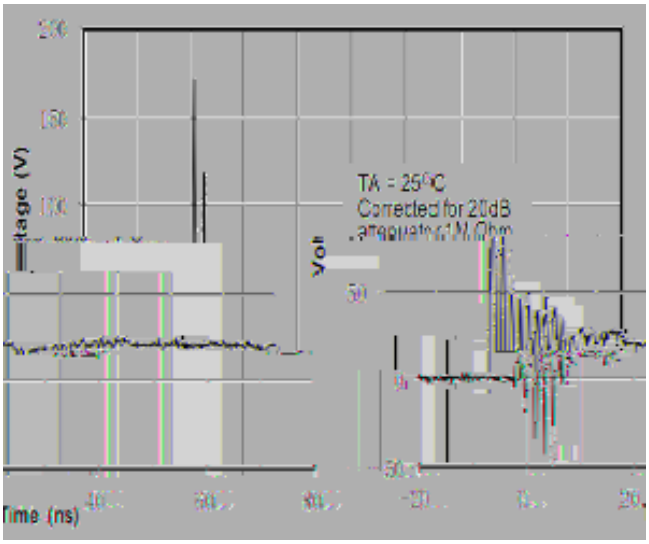

Outline Dimensions

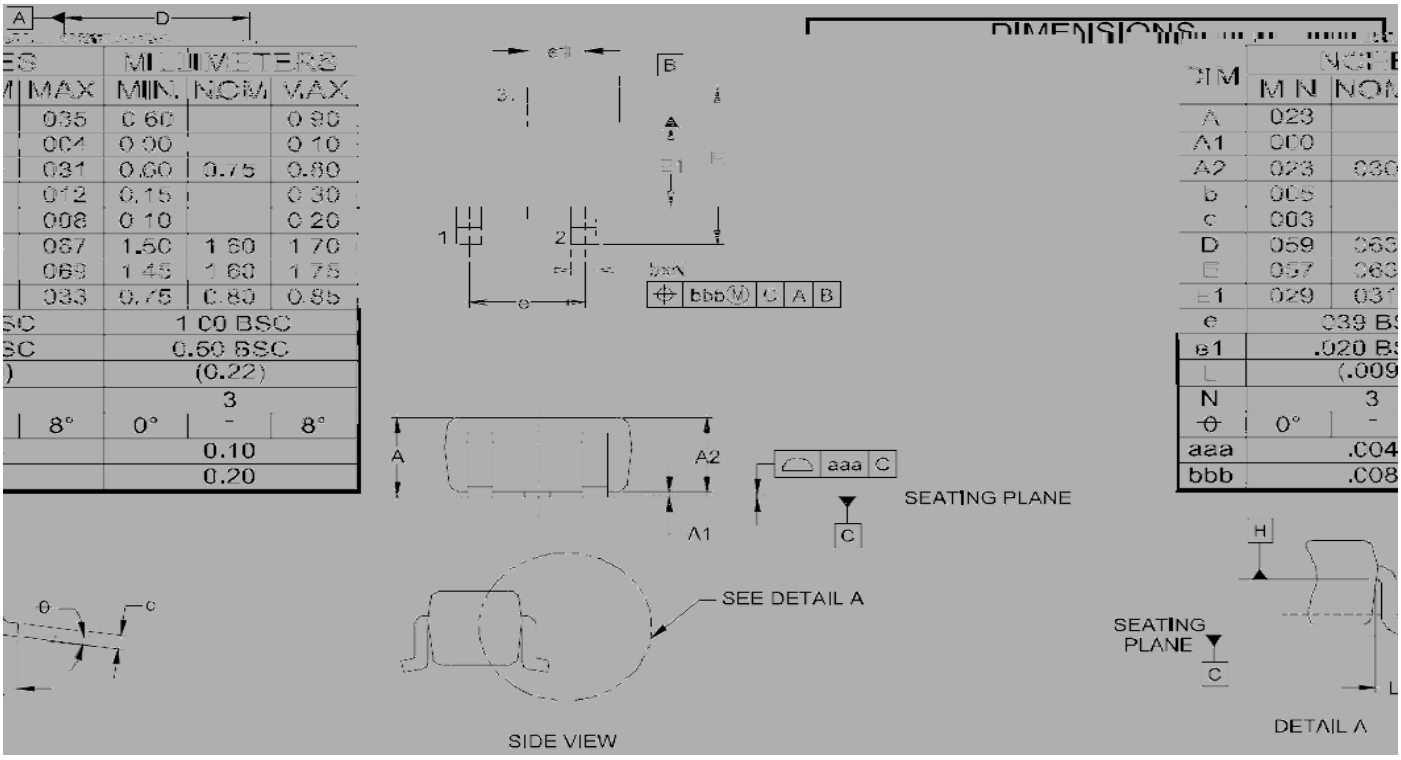

■ Soldering Footprint

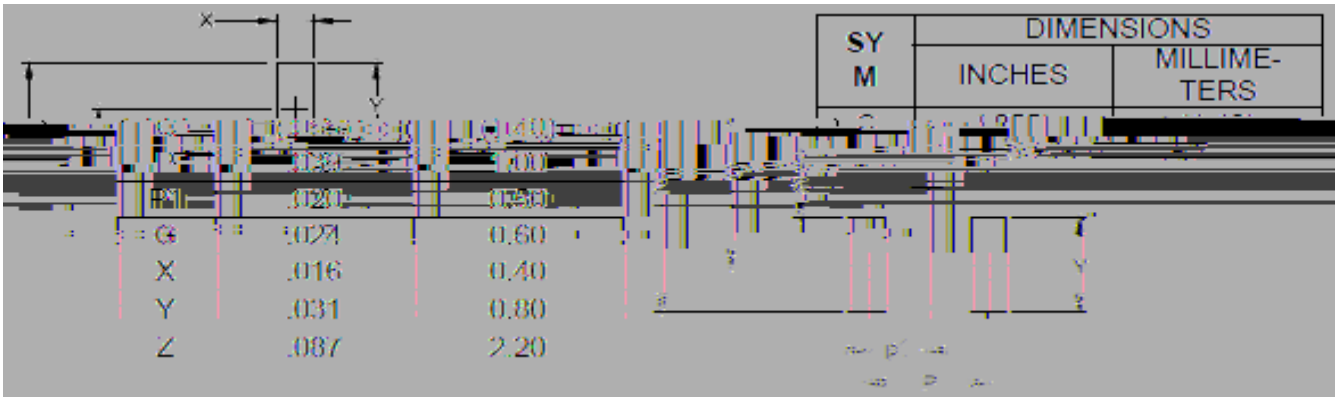

Disclaimer