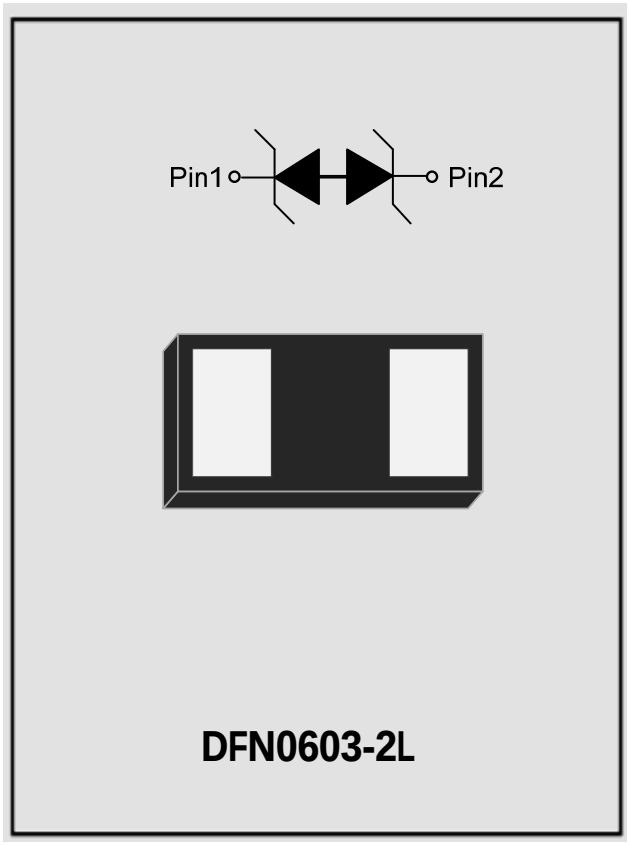
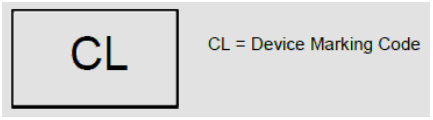
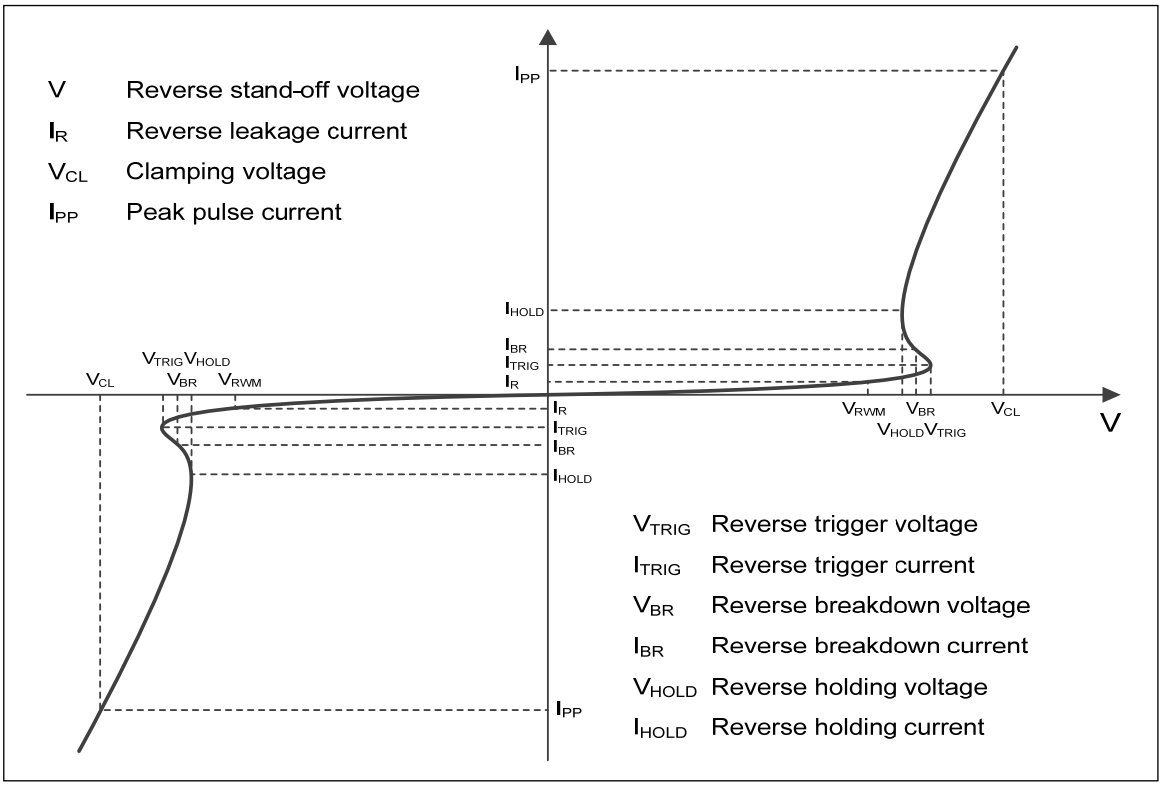
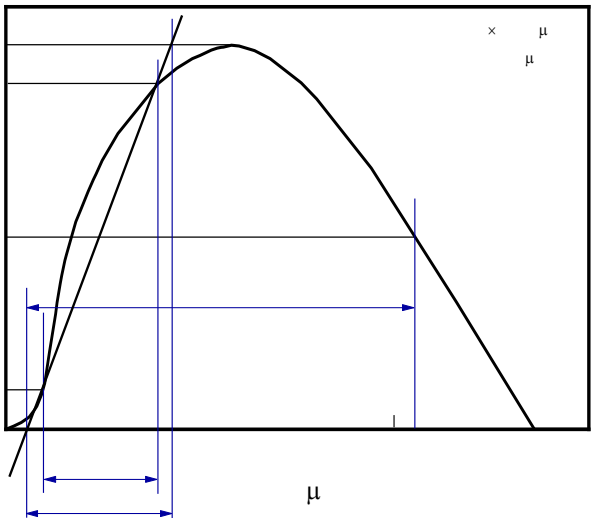
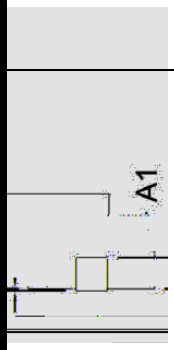

Pin1
Pin2
DFN0603-2L


CL
CL = Device Marking Code


V Reverse stand-off voltage
IR Reverse leakage current
VCL Clamping voltage
IPP Peak pulse current
IPP
IHOLD
IBR
ITRIG
IR
VTRIG VHOLD
VCL
VBR
VRWM
V
VTRIG Reverse trigger voltage
ITRIG Reverse trigger current
VBR Reverse breakdown voltage
IBR Reverse breakdown current
VHOLD Reverse holding voltage
IHOLD Reverse holding current

1)						
1)						
2)						
3)						


×
μ
μ
μ


A1
