MF150C06F5

RoHS COMPLIANT



FRED Modules

V_{RRM} 600V
I_{FAV} 150 A


Applications

- Inversion Welder
- Uninterruptible Power Supply (UPS)
- Plating Power Supply
- Ultrasonic Cleaner and Welder
- Power Factor Correction (PFC) Circuit
- Converter & Chopper

Features

- Soft Reverse Recovery Characteristics
- Ultrafast Reverse Recovery Time
- Low Reverse Recovery Loss
- Low Forward Voltage
- High Surge Current Capability
- Low Inductance Package
- Insulation Encapsulation

Circuit

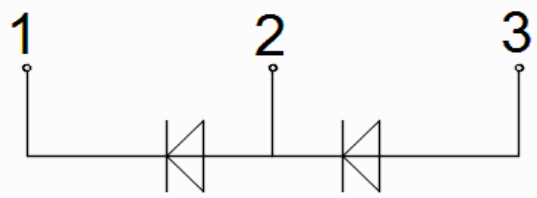

Maximum Ratings

Symbol	Conditions	Values	Units
V_R		600	V
V_{RRM}		600	V
$I_{F(AV)}$	T_C=100°C, Per Diode	150	A
	T_C=100°C, Per Module	300	A
$I_{F(RMS)}$	T_C=100°C, Per Diode	212	A
I_{FSM}	1/2 Cycle , 50Hz, Sine	1400	A
	1/2 Cycle , 60Hz, Sine	1536	A
I^2t	T_J=45°C, t=10ms, 50Hz, Sine	9800	A^2s
	T_J=45°C, t=8.3ms, 60Hz, Sine		A^2s
P_D		480	W
Visol	AC, Ton=1min	3000	V
T_J		-40 to +150	°C
T_{STG}		-40 to +125	°C
Torque	Recommended（M6）	3±15%	N·m
Torque	Recommended（M6）	3±15%	N·m
Weight		160	g

Thermal Characteristics

Symbol	Conditions	Values	Units
$R_{th(j-c)}$	Junction-to-Case, Per Diode	0.32	/W
$R_{th(j-c)}$	Junction-to-Case, Per Module	0.16	/W

Electrical Characteristics

Symbol	Conditions	Values			Units
		Min.	Typ.	Max.	
I_{RM}	V_R=600V	--	--	1	mA
	V_R=600V, T_J=125°C	--	--	5	mA
V_F	I_F=150A	--	1.28	1.5	V
	I_F=150A, T_J=125°C	--	--	1.4	V
trr	I_F=1A, V_R=30V, di_F/dt=-200A/ s	--	50	--	ns
trr	V_R=300V, I_F=150A, di_F/dt=-200A/ s, T_J=25°C	--	130	--	ns
I_{RRM}		--	14	--	A
trr	V_R=300V, I_F=150A, di_F/dt=-200A/ s, T_J=125°C	--	220	--	ns
I_{RRM}		--	22	--	A

Performance Curves

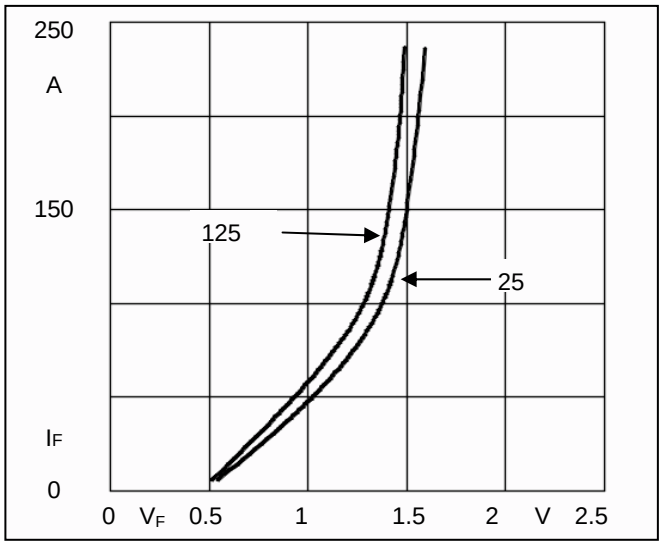


Fig1. Forward Voltage Drop vs Forward Current

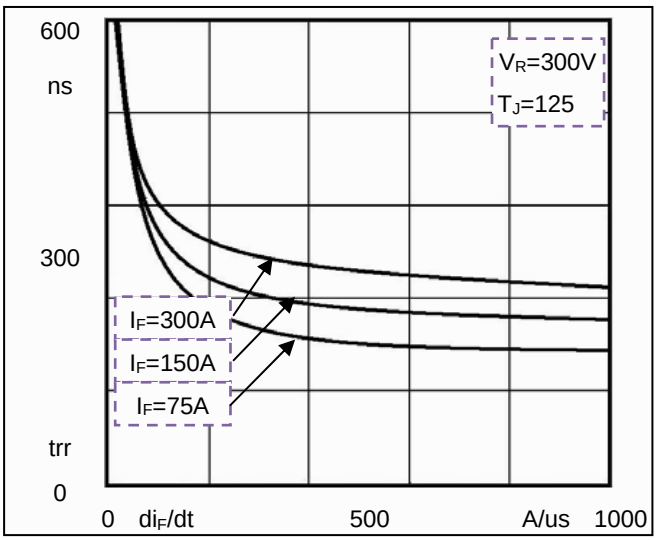


Fig2. Reverse Recovery Time vs di_F/dt

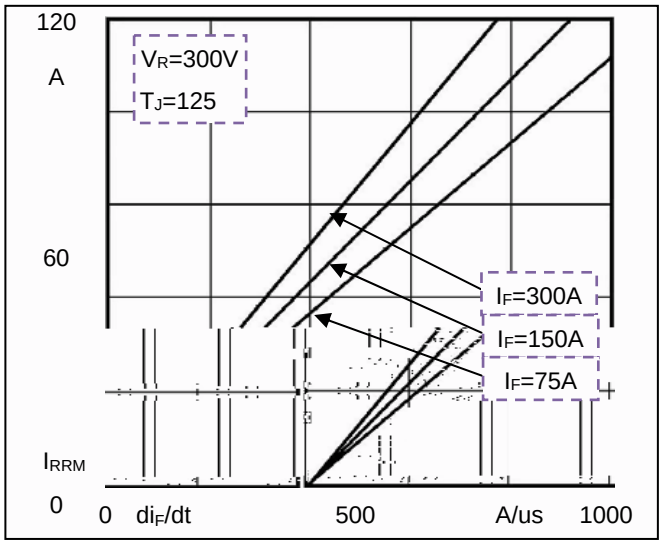


Fig3. Reverse Recovery Current vs di_F/dt


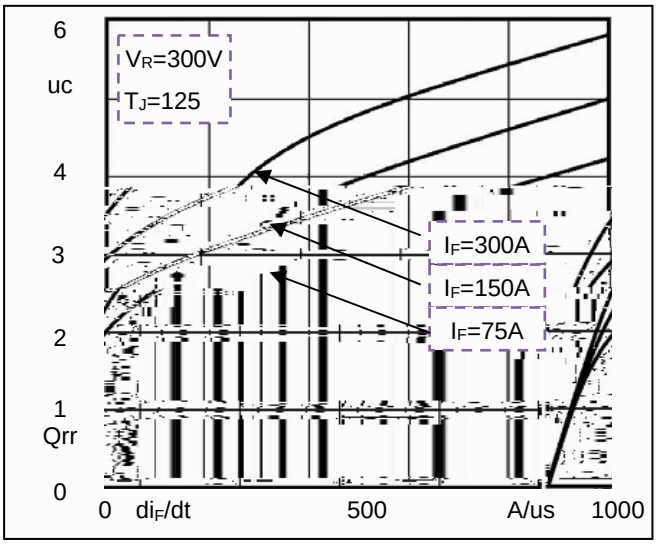


Fig4. Reverse Recovery Charge vs di_F/dt

Package Outline Information

CASE: F5

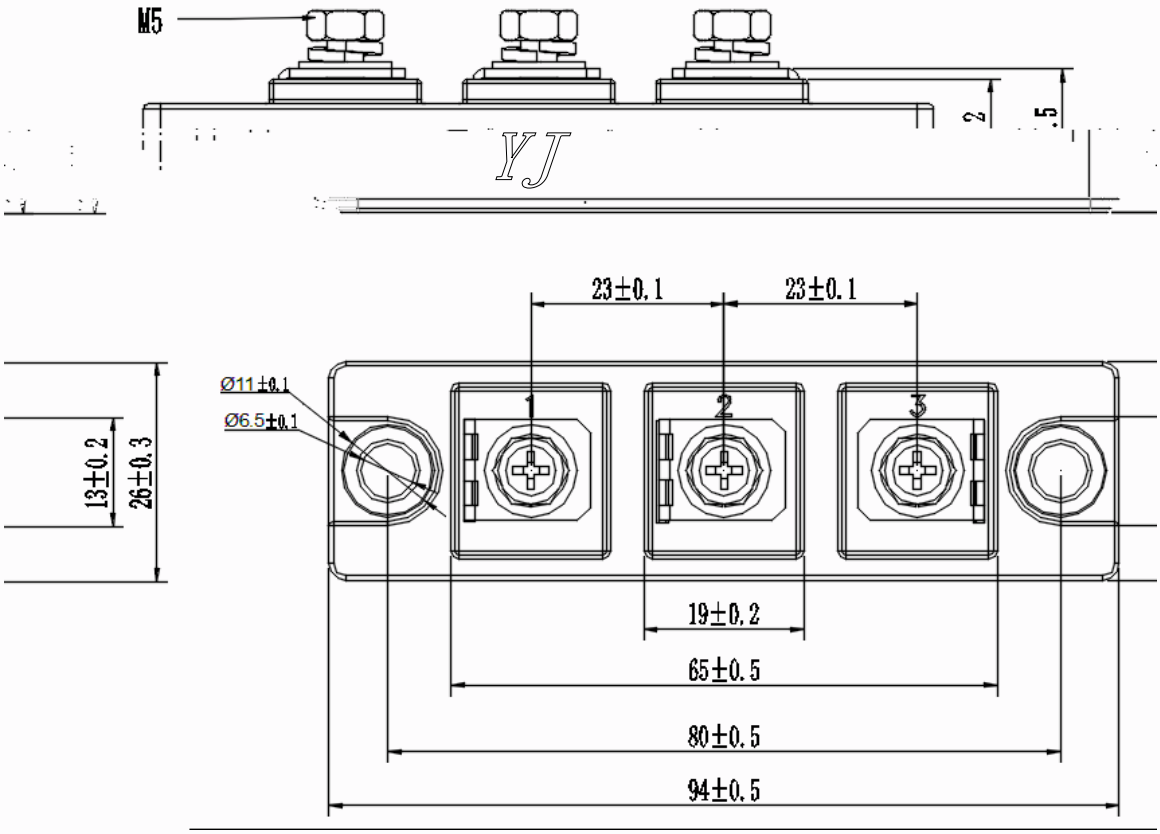

Dimensions in mm