
MF200K04F3LG

RoHS COMPLIANT

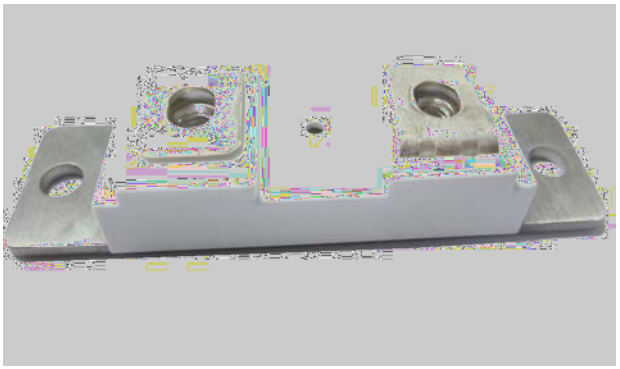

FRED Modules

V_{RRM}
I_{FAV}


Applications

-
-
-
-
-
-

Features

-
-
-
-
-
-

Circuit

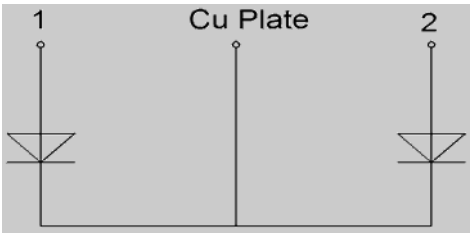

Maximum Ratings

Symbol	Conditions	Values	Units
		45000	

Thermal Characteristics

Symbol	Conditions	Values	Units
			℃
			℃

Electrical Characteristics

Symbol	Conditions	Values			Units
		Min.	Typ.	Max.	

Performance Curves

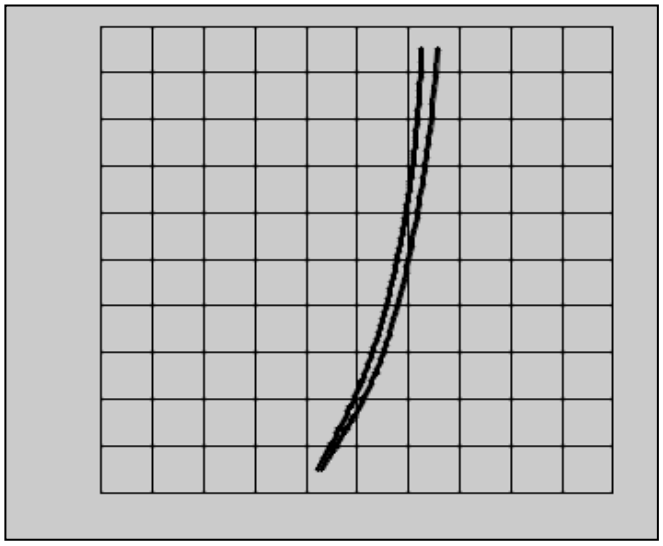


Fig1. Forward Voltage Drop vs Forward Current

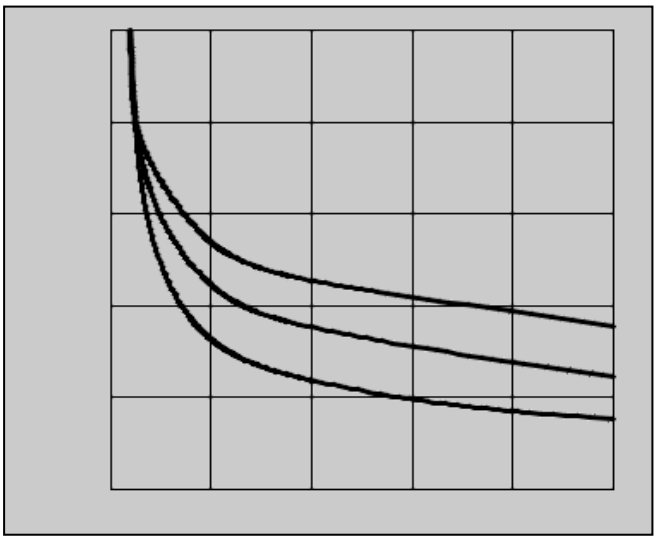


Fig2. Reverse Recovery Time vs di_F/dt

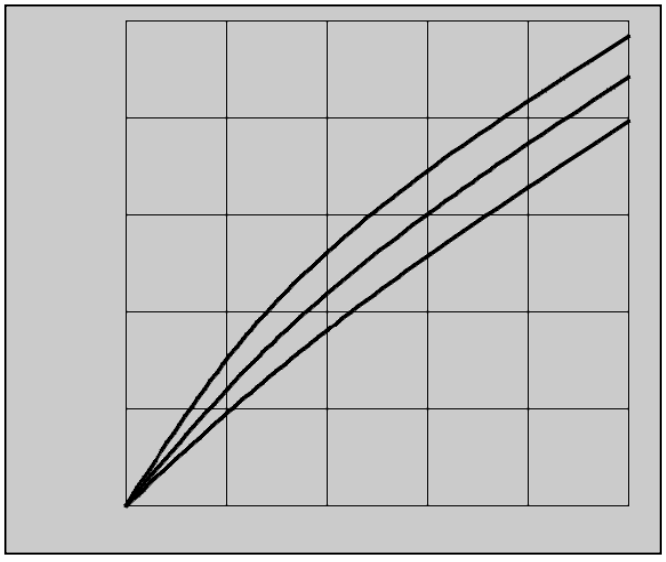



Fig3. Reverse Recovery Current vs di_F/dt



Fig4. Reverse Recovery Charge vs di_F/dt

Package Outline Information

CASE: F3

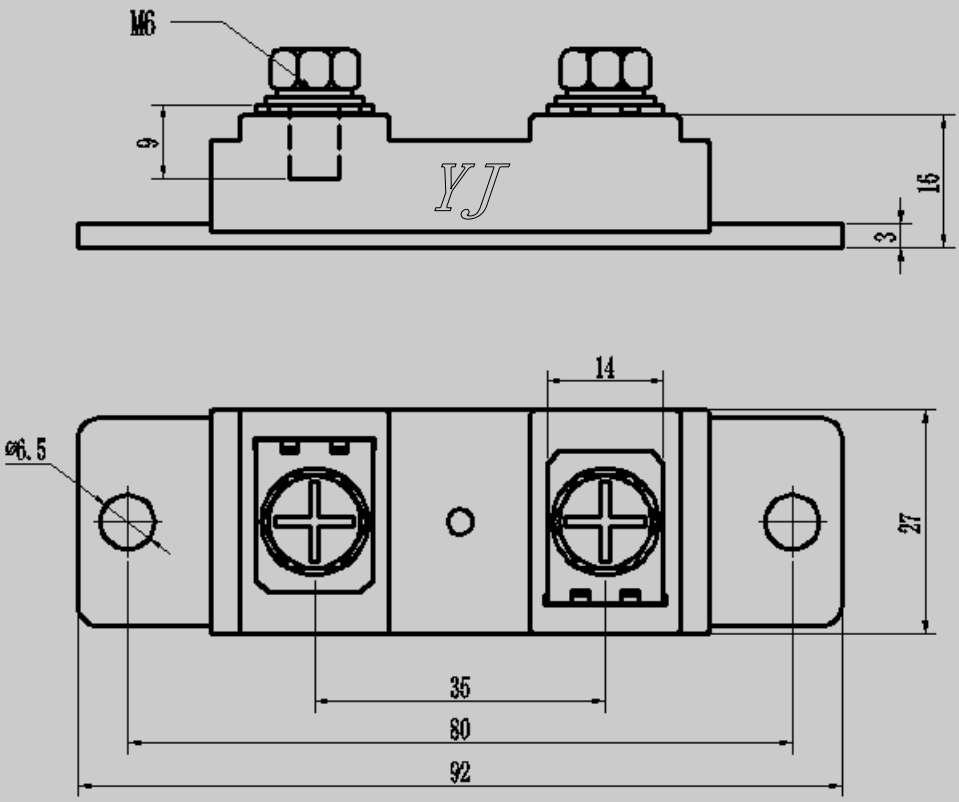

Dimensions in mm