

N-Channel Enhancement Mode Field Effect Transistor




Top View



Bottom View

SOT-363



Product Summary

V_{DS}	20 V
I_D	0.8 A
$R_{DS(ON)}$(at V_{GS}=4.5V)	＜300 mohm
$R_{DS(ON)}$(at V_{GS}=2.5V)	＜400 mohm
$R_{DS(ON)}$(at V_{GS}=1.8V)	＜700 mohm

ESD Protected Up to 2.0KV (HBM)

General Description

Trench Power LV MOSFET technology
High Power and current handing capability
% % % %
Epoxy Meets UL 94 V-0 Flammability Rating
Halogen Free

Applications

PWM application
Load switch

Absolute Maximum Ratings (T_A=25℃unless otherwise noted)

Parameter		Symbol	Limit	Unit
Drain-source Voltage		V_{DS}	20	V
Gate-source Voltage		V_{GS}	±12	V
Drain Current	T_A=25℃ @ Steady State	I_D	0.8	A
	T_A=70℃ @ Steady State		0.6	
Pulsed Drain Current [A]		I_{DM}	3.3	A
Total Power Dissipation @ T_A=25℃		P_D	0.29	W
Thermal Resistance Junction-to-Ambient @ Steady State		R_{JA}	420	℃/W
Junction and Storage Temperature Range		T_J ,T_{STG}	-55～+150	℃

Ordering Information

PREFERED P/N	PACKING CODE	Marking	MINIMUM PACKAGE(pcs)	INNER BOX QUANTITY(pcs)	OUTER CARTON QUANTITY(pcs)	DELIVERY MODE
YJL3134KADW	F2	34KA	3000	30000	120000	reel

Electrical Characteristics (T_J=25℃ unless otherwise noted)

Parameter	Symbol	Conditions	Min	Typ	Max	Units
Static Parameter						
Drain-Source Breakdown Voltage	BV_{DSS}	V_{GS}= 0V, I_D=250 F	20			V
Zero Gate Voltage Drain Current	I_{DSS}	V_{DS}=20V,V_{GS}=0V			1	F
Gate-Body Leakage Current	I_{GSS}	V_{GS}= ±10V, V_{DS}=0V		2.5	±10	F
		V_{GS}= ±8V, V_{DS}=0V		500	±2000	nA
Gate Threshold Voltage	$V_{GS(th)}$	V_{DS}= V_{GS}, I_D=250 F	0.35	0.75	1.1	V
Static Drain-Source On-Resistance	$R_{DS(ON)}$	V_{GS}= 4.5V, I_D=0.5A		220	300	
		V_{GS}= 2.5V, I_D=0.45A		290	400	
		V_{GS}= 1.8V, I_D=0.2A		420	700	
Diode Forward Voltage [C]	V_{SD}	I_S=0.5A,V_{GS}=0V		0.85	1.2	V
Maximum Body-Diode Continuous Current	I_S				0. 5	A
Gate Resistance	Rg	f=1 MHz		50		
Dynamic Parameters [B]						
Input Capacitance	C_{iss}	V_{DS}=10V,V_{GS}=0V,f=1MHZ		33		pF
Output Capacitance	C_{oss}			20		
Reverse Transfer Capacitance	C_{rss}			10		
Switching Parameters [B]						
Total Gate Charge	Q_g	V_{GS}=4.5V,V_{DS}=10V,I_D=0.5A		0.8		nC
Gate Source Charge	Q_{gs}			0.3		
Gate Drain Charge	Q_{gd}			0.15		
Reverse Recovery Chrage	Q_{rr}	I_F=0.5A, di/dt=20A/us		0.4		
Reverse Recovery Time	t_{rr}			14.4		ns
Turn-on Delay Time	$t_{D(on)}$	V_{GS}=4.5V,V_{DD}=10V,R_G=10 ,I_D=500mA		4		
Turn-on Rise Time	t_r			18.8		
Turn-off Delay Time	$t_{D(off)}$			10		
Turn-off Fall Time	t_f			23		

A. Repetitive Rating: Pulse width limited by maximum junction temperature.
B. These parameters have no way to verify.
C. % % % 855 1% %kl 53 3

Typical Performance Characteristics

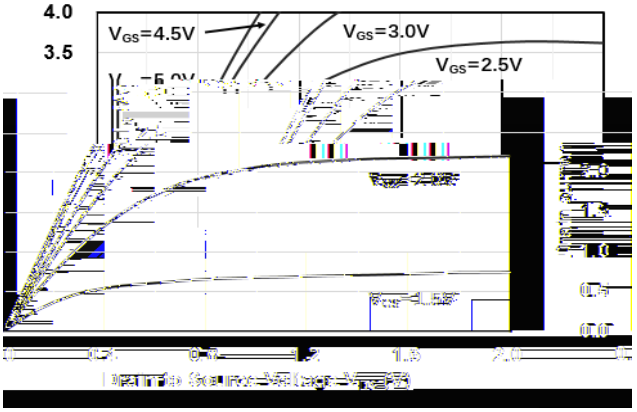


Figure1. Output Characteristics

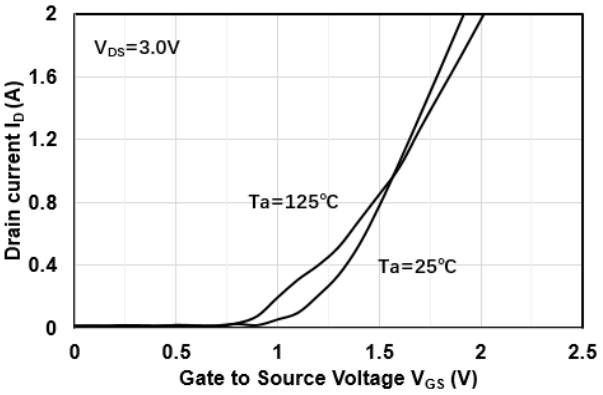


Figure2. Transfer Characteristics

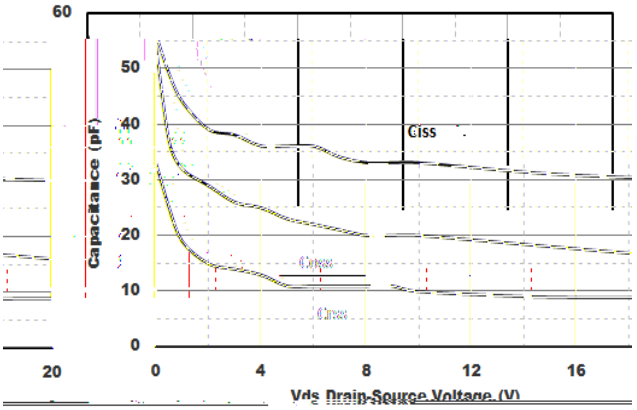


Figure3. Capacitance Characteristics

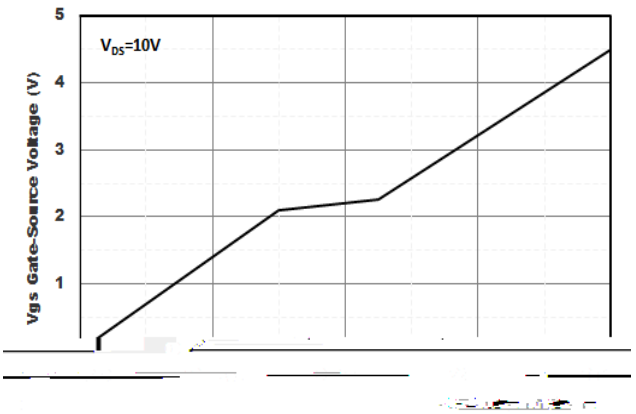


Figure4. Gate Charge

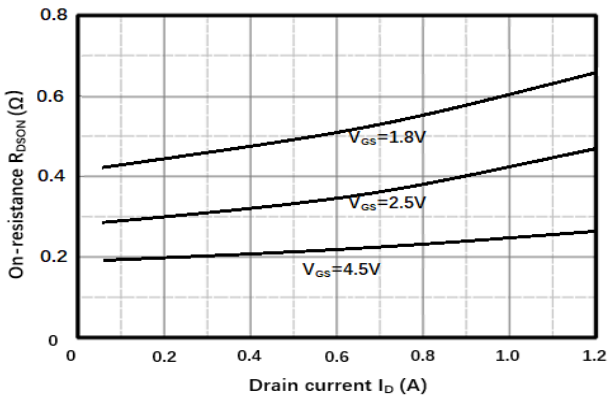


Figure5. Drain-Source on Resistance


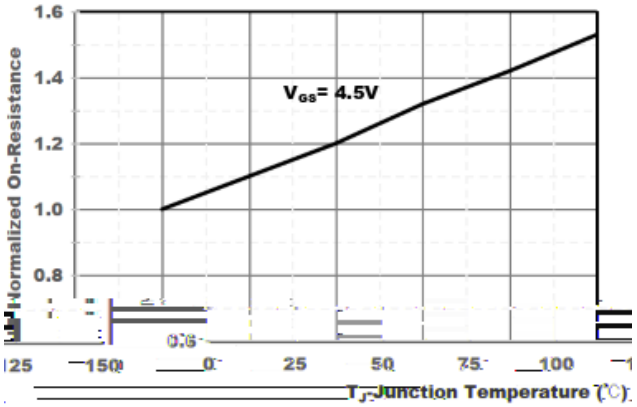


Figure6. Drain-Source on Resistance

YJL3134K

SOT-363 Package information

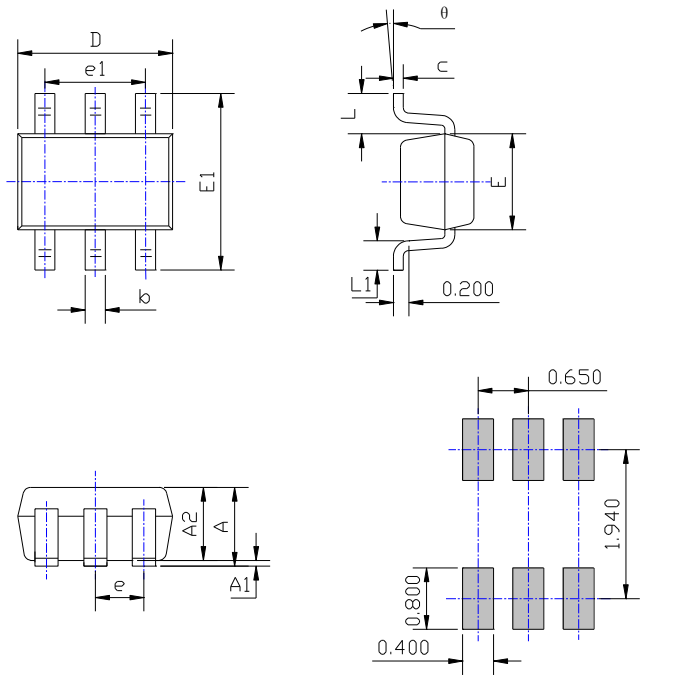

UNIT：mm

DIMENSIONS				
SYMBOL	INCHES		Millimeter	
	MIN.	MAX.	MIN.	MAX.
A	0.035	0.043	0.900	1.100
A1	0.000	0.004	0.000	0.100
A2	0.035	0.039	0.900	1.000
b	0.006	0.014	0.150	0.350
c	0.004	0.010	0.100	0.250
D	0.071	0.087	1.800	2.200
E	0.045	0.053	1.150	1.350
E1	0.085	0.096	2.150	2.450
e	0.026TYP		0.650TYP	
e1	0.047	0.055	1.200	1.400
L	0.021REF		0.525REF	
L1	0.010	0.018	0.260	0.460
θ	0°	8°	0°	8°

NOTE:
1.PACKAGE BODY SIZES EXCLUDE MOLD FLASH AND GATE BURRS.
2.TOLERANCE 0.1mm UNLESS OTHERWISE SPECIFIED.
3.THE PAD LAYOUT IS FOR REFERENCE PURPOSES ONLY.

Disclaimer

The information presented in this document is for reference only. Yangzhou Yangjie Electronic Technology Co., Ltd. reserves the right to make changes without notice for the specification of the products displayed herein to improve reliability, function or design or otherwise.

The product listed herein is designed to be used with ordinary electronic equipment or devices, and not designed to be used with equipment or devices which require high level of reliability and the malfunction of with would directly endanger human life (such as medical instruments, transportation equipment, aerospace machinery, nuclear-reactor controllers, fuel controllers and other safety devices), Yangjie or anyone on its behalf, assumes no responsibility or liability for any damages resulting from such improper use of sale.

This publication supersedes & replaces all information previously supplied. For additional information, please visit our website http:// www.21yangjie.com , or consult your nearest Yangji % % % % % 3