
****

T12D

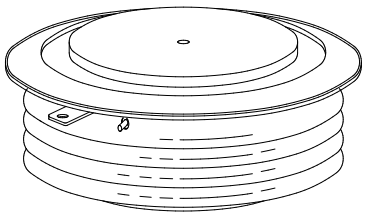

Device Type	V_{RRM} (1)	V_{DRM} (1)	V_{RSM} (1)
KP1430/60	5100	5100	6000
KP1430/62	5300	5300	6200
KP1430/65	5600	5600	6500

V_{RRM} = Repetitive peak reverse voltage
V_{DRM} = Repetitive peak off state voltage
V_{RSM} = Non repetitive peak reverse voltage (2)

Notes:
(1) All voltage ratings are specified for an applied 50Hz sinusoidal waveform over the temperature range -40 °C to +125 °C.
(2) 10 msec. max. pulse width
(3) Maximum value for Tj = 125 °C.
(4) Minimum value for linear and exponential waveshape to 67% rated V_{DRM}. Gate open. Tj = 125 °C.
(5).The value of di/dt is established in accordance with EIA/NIMA Standard JB/T 8950.2-2013

Repetitive peak reverse leakage and off state leakage	I_{RRM}/I_{DRM}	5 mA 200 mA (3)	
Critical rate of voltage rise	dv/dt (4)	2000 V/µ	

Average value of on-state current	$I_{T(AV)}$	1430	A	Sinewave,180° conduction,T_c=70°C
RMS value of on-state current	I_{TRMS}	2245	A	Nominal value
Peak one cycle surge (non repetitive) current	I_{TSM}	32000	A	10.0 msec (50Hz), sinusoidal wave-shape, 180° conduction, T_j = 125 °C
I square t	I^2t	$5.12x10^6$	A^2s	10 msec

Peak gate power dissipation	P_{GM}		20		W	
Average gate power dissipation	$P_{G(AV)}$		4		W	
Gate-trigger current	I_{GT}		200		mA	V_D =12 V;R_L = 3 ohms;T_j = +25 °C
Gate- trigger voltage	V_{GT}	0.7	2.6		V	V_D = 12 V;R_L = 3 ohms;T_j = +25 °C
Peak negative voltage	V_{GRM}		10		V	

Delay time	t_d			3.0	μs	I_{TM}=100A; V_D=67%V_{DRM} V_G=30V; R_G=10ohms; t_r=0.1μs; t_p=20μs
Turn-off time (with V_R = -5 V)	t_q			700	μs	I_{TM} =2000A; di/dt =-10A/μs; V_R =100V; dv/dt=30V/μs ; V_D= 67%V_{DRM} ;Tj=125
Reverse recovery charge	Q_{rr}		3000		μC	I_{TM}=2000A di/dt=-10A/μs; V_R=100V; T_j=125

Operating temperature	T_j	-40	+125		°C	
Storage temperature	T_{stg}	-40	+140		°C	
Thermal resistance - junction to case	$R_{\Theta(j-c)}$		0.011		°C/W	Double sided cooled
Thermal resistance - case to heatsink	$R_{\Theta(c-s)}$		0.004		°C/W	Double sided cooled
Mounting force	F	48	52	50	kN	
Weight	m			1.4	kg	

* Mounting surfaces smooth, flat and greased

