

Small-Signal Fast Switching Diodes

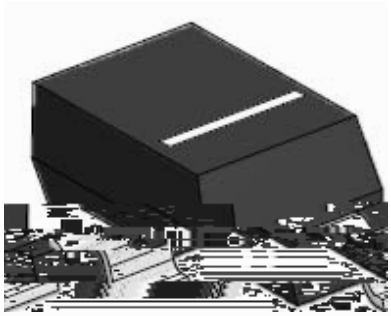



Features

Typical Applications

Mechanical Data

Package
Terminals

Polarity:
Marking:

Maximum Ratings

PARAMETER	SYMBOL	UNIT	Conditions	VALUE


Electrical Characteristics


PARAMETER	Symbol	UNIT	Conditions	Min	Max


Ordering Information


PREFERED P/N	PACKING CODE	UNIT WEIGHT(g)	MINIMUM PACKAGE(pcs)	INNER BOX QUANTITY(pcs)	OUTER CARTON QUANTITY(pcs)	DELIVERY MODE

Characteristics

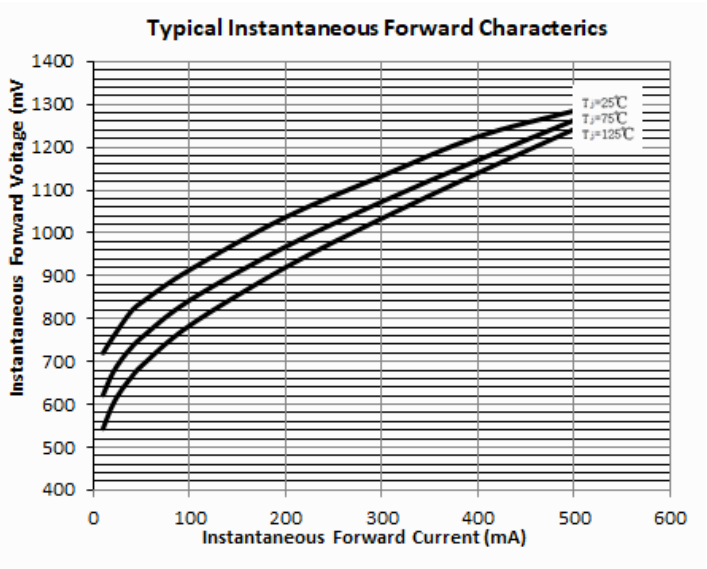


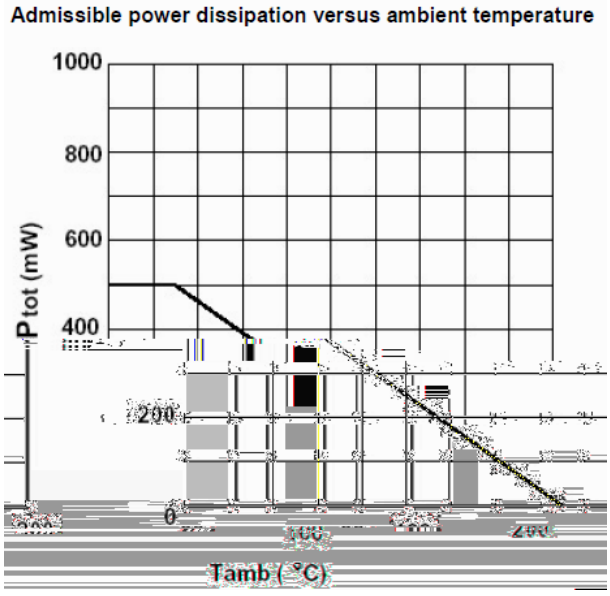

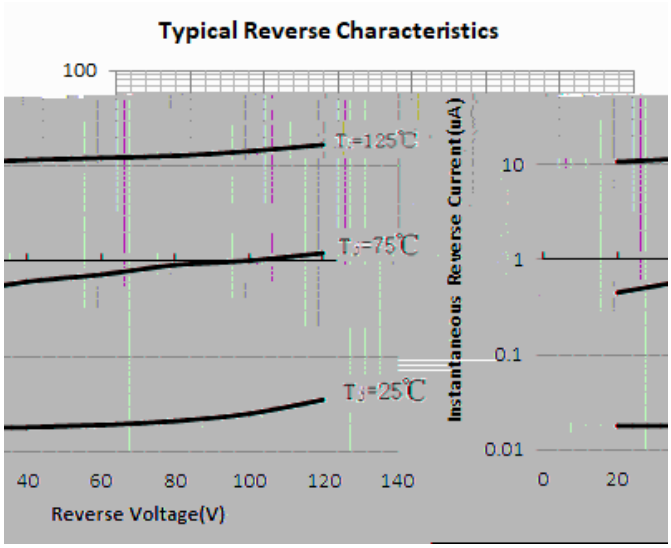

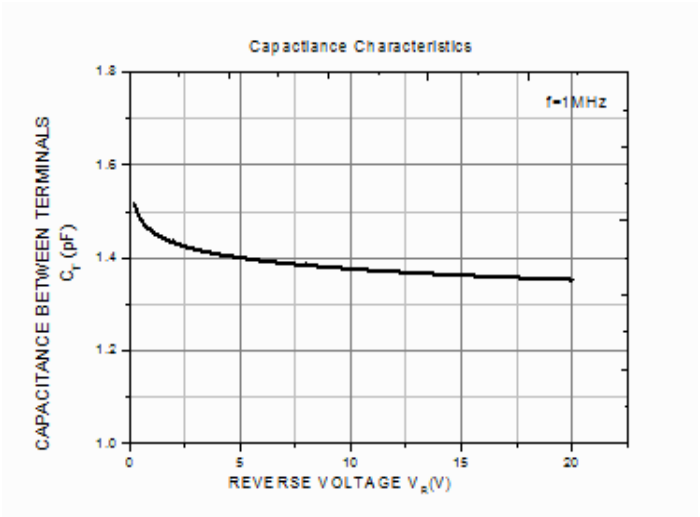


Outline Dimensions

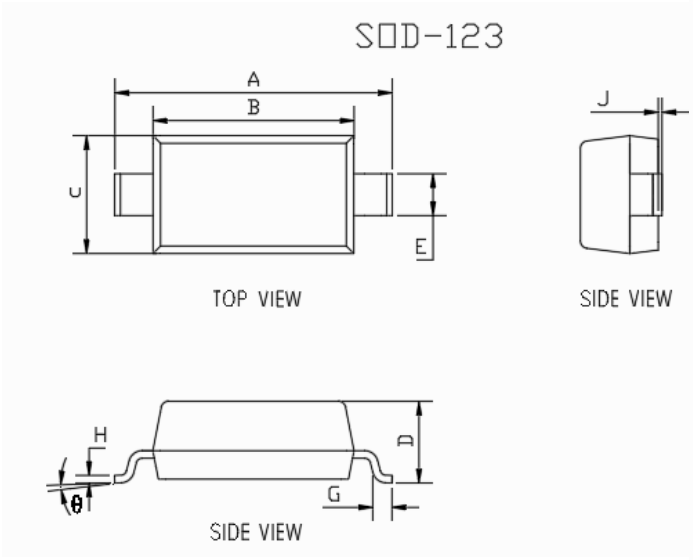

DIMENSIONS				
DIM	INCHES		MM	
	MIN	MAX	MN	MAX
A	0.140	0.152	3.550	3.850
B	0.100	0.112	2.550	2.850
C	0.055	0.071	1.400	1.800
D	0.037	0.053	0.950	1.350
[illegible]	[illegible]	[illegible]	[illegible]	[illegible]
G	0.006	0.018	0.150	0.450
H	0.003	0.010	0.080	0.250
J	0.000	0.006	0.000	0.150
θ	0	8°	0	8°

■ Soldering Footprint

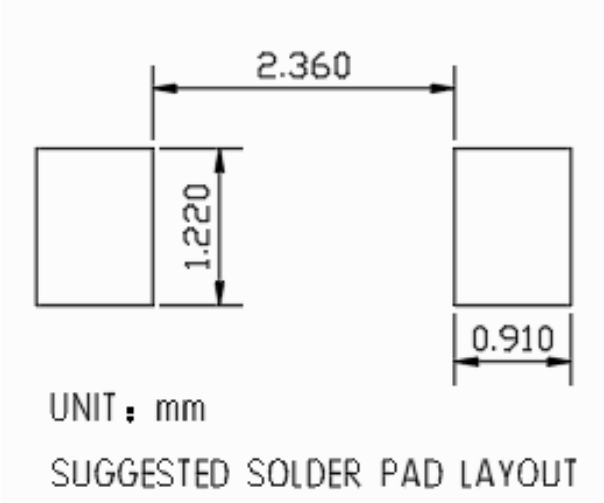

Disclaimer