
PNP General Purpose Amplifier

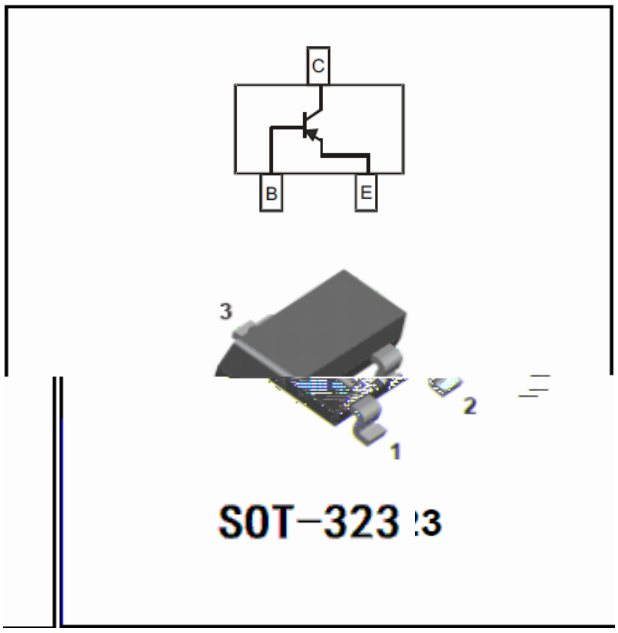

Features

- ●Epoxy meets UL-94 V-0 flammability rating
- ● Halogen free available upon request by adding suffix ”HF”
- ●Moisure Sensitivity Level 1
- ●Marking:K4M

■Maximum Rantings (Ta=25)

Item	Symbol			
			= 0	-150
Collector-Base Voltage	V_{CBO}	V	I_C = -100uAdc $_{I_E}$ =0	-1 6 0
Emitter-Base Voltage	V_{EBO}	V	I_E = -10uAdc $_{I_C}$ =0	-5 . 0
Collector Current	I_C	mA		- 6 00
Collector Power Dissipation	P_C	mW		200
Operation J unction Temperature	T_j			150
Storage Temperature	T_{stg}			-55 to +150

■Electrical Characteristics（Ta=25 ）

Item	Symbol	Unit	Conditions	Min	Max
Collector-Emitter Voltage	V_{CEO}	V	I_C=-1.0mAdc, I_B=0	-150	
Collector-Base Voltage	V_{CBO}	V	I_C=-100uAdc, I_E=0	-160	
Emitter-Base Voltage	V_{EBO}	V	I_E=-10uAdc, I_C=0	-5	
Collector-Base Cut-off Current	I_{CBO}	nA	V_{CB}=-120Vdc		-50
Emitter-Base Cut-off Current	I_{EB0}	nA	V_{EB}=-3Vdc		-50
DC Current Gain	h_{FE}		I_C=-1.0mA V_{CE}=-5.0Vdc	50	
			I_C=-10mA V_{CE}=-5.0Vdc	60	300
			I_C=-50mA V_{CE}=-5.0Vdc	50	
Collector-Emitter Saturation Voltage	$V_{CE(sat)}$	V	I_C=-50mA I_B=-5.0mA		-0.5
Base-Emitter Saturation Voltage	$V_{BE(sat)}$	V	I_C=-50mA I_B=-5.0mA		-1.0

■Small-signal Characteristics（Ta=25 ）


Item	Symbol	Unit	Conditions	Min	Max
Transition frequency	f_T	MHz	I_C=-10mAdc, V_{CE}=-10Vdc,f=100MHz	100	300

■Ordering Information (Example)


PREFERED P/N	PACKING CODE	UNIT WEIGHT(g)	MINIMUM PACKAGE(pcs)	INNER BOX QUANTITY(pcs)	OUTER CARTON QUANTITY(pcs)	DELIVERY MODE
MMST5401	F2	Approximate 0.005	3000	30000	120000	7” reel

■**Characteristics**(Typical)


Static Characteristic

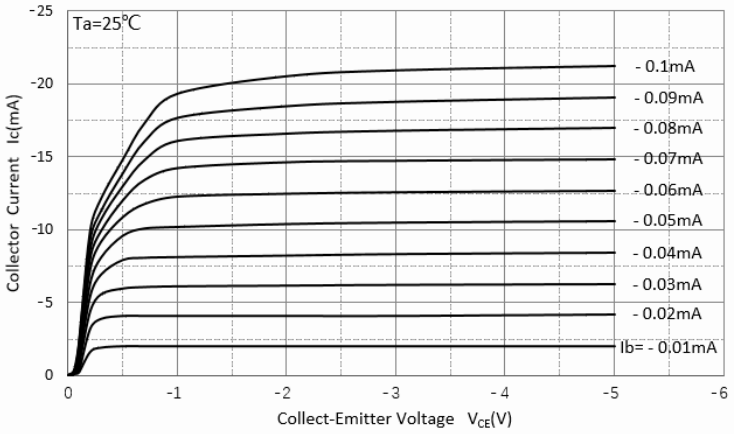


DC Current Gain

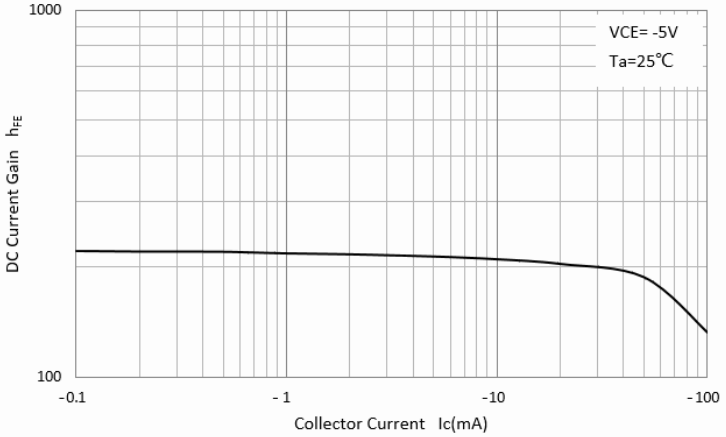


Collector-Emitter Saturation Voltage

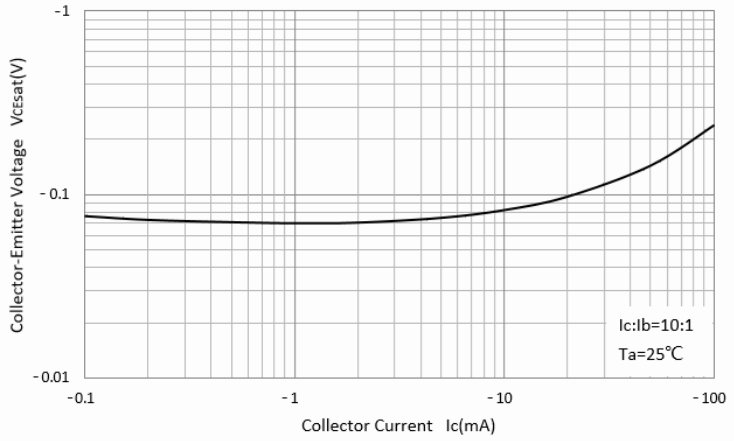


Base-Emitter Saturation Voltage

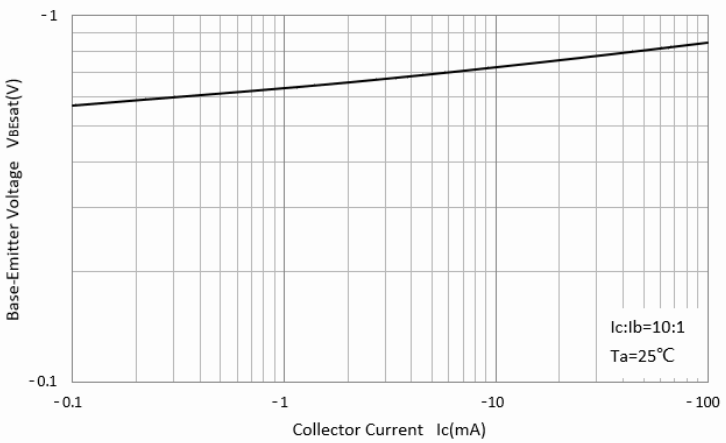


Base-Emitter On Voltage

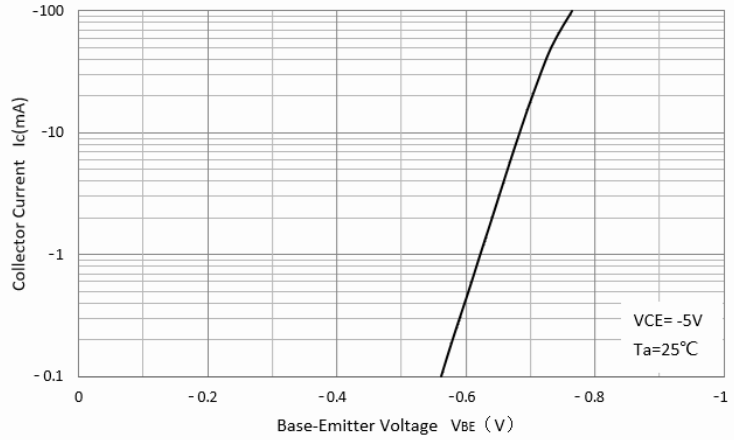

Cob/Cib-V_{CB}/V_{EB}

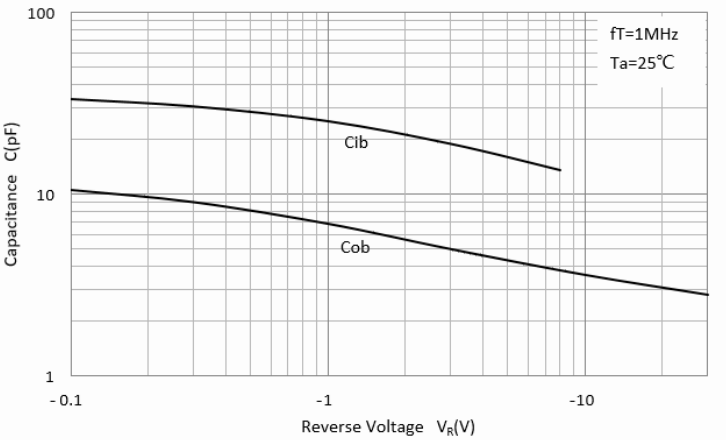


■SOT-323 Package Outline Dimensions

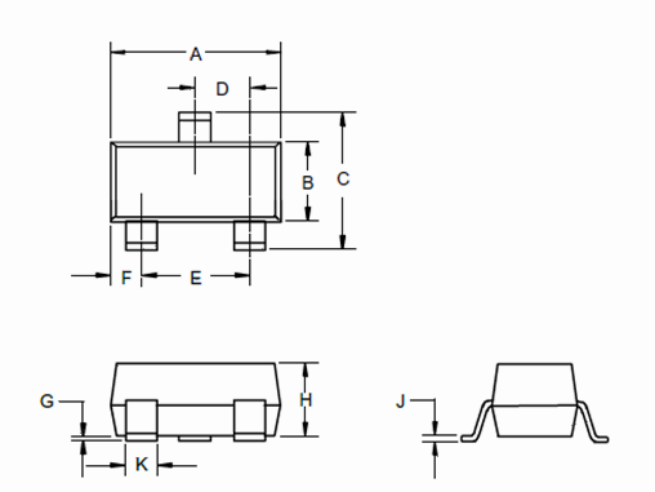

DIMENSIONS					
	INCHES		MM		
DIM	MIN	MAX	MIN	MAX	NOTE
A	.071	.087	1.80	2.20	
B	.045	.053	1.15	1.35	
C	.083	.096	2.10	2.45	
D	.026 Nominal		0.65Nominal		
E	.047	.055	1.20	1.40	
F	.012	.016	.30	.40	
G	.000	.004	.000	.100	
H	.035	.039	.90	1.00	
J	.004	.010	.100	.250	
K	0°	8°	0°	8°	

■SOT-323 Soldering Footprint

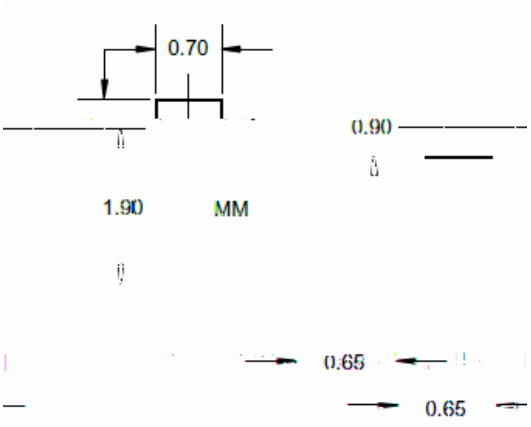

Disclaimer

The information presented in this document is for reference only. Yangzhou Yangjie Electronic Technology Co., Ltd. reserves the right to make changes without notice for the specification of the products displayed herein to improve reliability, function or design or otherwise.

The product listed herein is designed to be used with ordinary electronic equipment or devices, and not designed to be used with equipment or devices which require high level of reliability and the malfunction of with would directly endanger human life (such as medical instruments, transportation equipment, aerospace machinery, nuclear-reactor controllers, fuel controllers and other safety devices), Yangjie or anyone on its behalf, assumes no responsibility or liability for any damages resulting from such improper use of sale.

This publication supersedes & replaces all information previously supplied. For additional information, please visit our website http:// www.21yangjie.com , or consult your nearest Yangjie's sales office for further assistance.