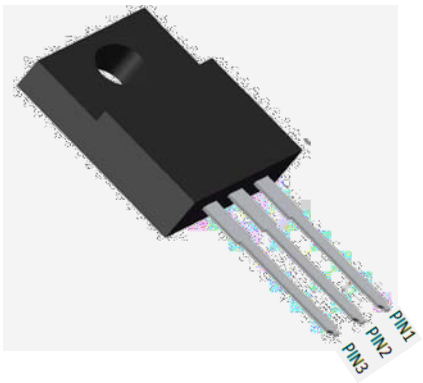
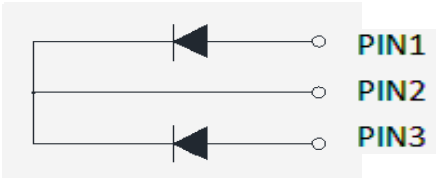
RoHS
COMPLIANT





- Adopt FRED chip
- Low forward Voltage drop
- Fast reverse recovery time
- High frequency operation
- High purity, high temperature epoxy encapsulation for enhanced mechanical strength and moisture resistance
- Guard ring for enhanced ruggedness and long term reliability

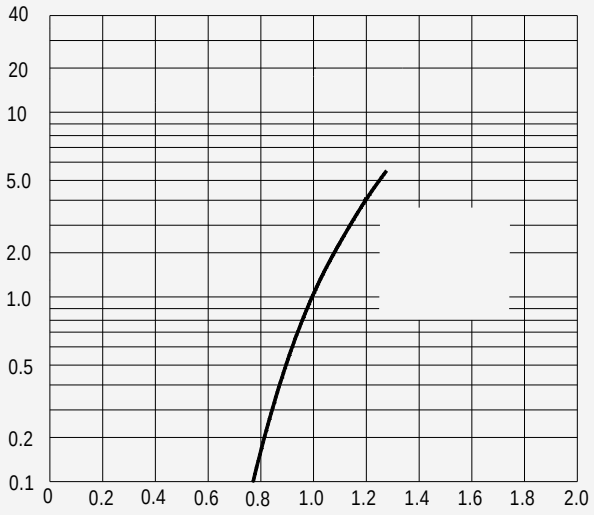
Typical applications are in switching power supplies, converters, freewheeling diodes, and reverse battery protection.

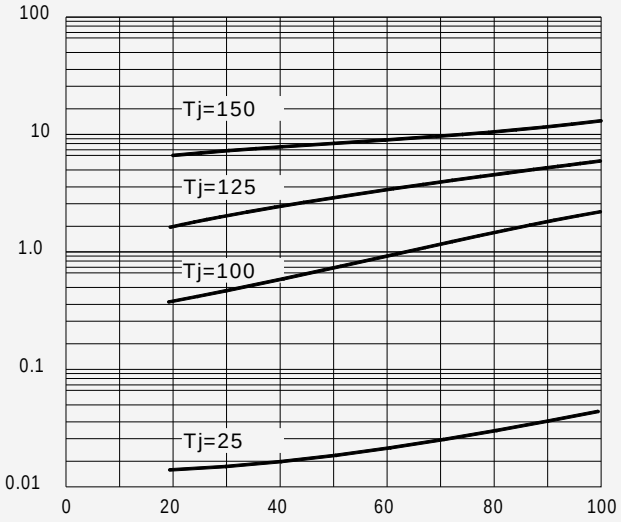
- : ITO-220AB
  Molding compound meets UL 94 V-0 flammability rating, RoHS-compliant
- : Tin plated leads, solderable per J-STD-002 and JESD22-B102
- : As marked

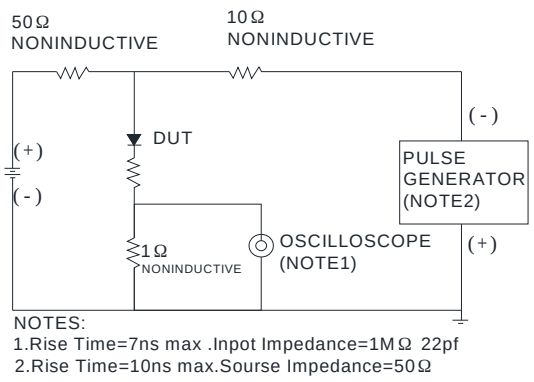
■ (Tj=25 Unless otherwise specified

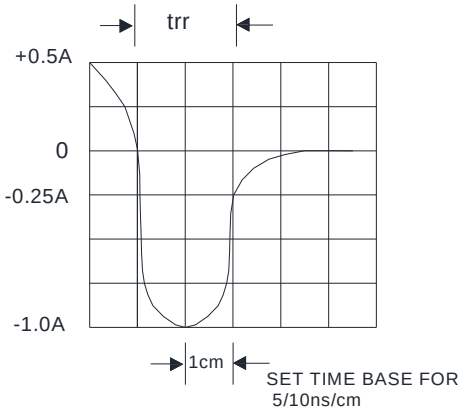
Device marking code			MUR2060FCT
Repetitive Peak Reverse Voltage	V_{RRM}	V	600
Average Rectified Output Current @60Hz sine wave, R-load, T_C(FIG.1)	I_O	A	20
Surge(Non-repetitive)Forward Current @60Hz half sine-wave, 1 cycle, T_j=25	I_{FSM}	A	120
Current Squared Time @1ms≤t≤8.3ms Tj=25	I^2t	A^2s	60
Storage Temperature	Tstg		-55 ~ +175
Junction Temperature	Tj		-55 ~ +175
Typical Junction capacitance @4V,1MHz	Cj	pF	40
Mounting torque @recommend torque 5kg cm	Tor	kg cm	8

■

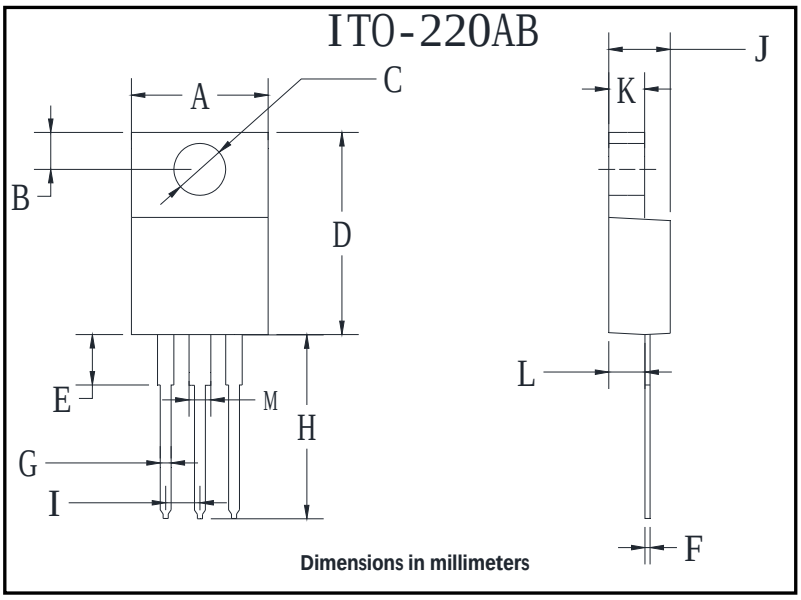

40
20
10
5.0
2.0
1.0
0.5
0.2
0.1
0
0.2
0.4
0.6
0.8
1.0
1.2
1.4
1.6
1.8
2.0


100
10
1.0
0.1
0.01
Tj=150
Tj=125
Tj=100
Tj=25
0
20
40
60
80
100


50Ω
NONINDUCTIVE
10Ω
NONINDUCTIVE
(+)
(-)
DUT
(-)
PULSE
GENERATOR
(NOTE2)
1Ω
NONINDUCTIVE
OSCILLOSCOPE
(NOTE1)
(+)
NOTES:
1.Rise Time=7ns max .Inpot Impedance=1MΩ 22pf
2.Rise Time=10ns max.Sourse Impedance=50Ω


trr
+0.5A
0
-0.25A
-1.0A
1cm
SET TIME BASE FOR
5/10ns/cm

■



Dim	Min	Max
A	9.8	10.2
B	2.25	2.75
C	2.95	3.45
D	14.75	15.25
E	3.05	3.95
F	0.45	0.75
G	0.45	0.75
H	13.4	14.2
I	2.35	2.75
J	4.3	4.8
K	2.58	2.82
L	2.58	2.82
M	1.47	1.77

The information presented in this document is for reference only. Yangzhou Yangjie Electronic Technology Co., Ltd. reserves the right to make changes without notice for the specification of the products displayed herein to improve reliability, function or design or otherwise.

The product listed herein is designed to be used with ordinary electronic equipment or devices, and not designed to be used with equipment or devices which require high level of reliability and the malfunction of with would directly endanger human life (such as medical instruments, transportation equipment, aerospace machinery, nuclear-reactor controllers, fuel controllers and other safety devices), Yangjie or anyone on its behalf, assumes no res t et