
Surface Mount Ultrafast Rectifier Diode

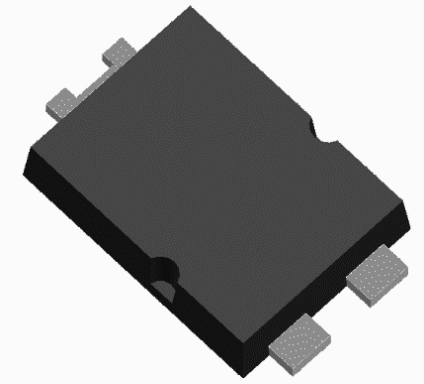

Features

-
-
-
-
-

Typical Applications

Mechanical Data

- **Package**
- **Terminals**
- **Polarity**



■Maximum Ratings

PARAMETER	SYMBOL	UNIT	MUR5AU60
≤ ≤			

■Electrical Characteristics

PARAMETER	SYMBOL	UNIT	TEST CONDITIONS		Min	Typ	Max

■Thermal Characteristics

PARAMETER	SYMBOL	UNIT	MUR5AU60
	θ		
	θ		

■ Ordering Information

PREFERED P/N	PACKAGE CODE	UNIT WEIGHT(g)	MINIMUM PACKAGE(pcs)	INNER BOX QUANTITY(pcs)	OUTER CARTON QUANTITY(pcs)	DELIVERY MODE

■ Characteristics



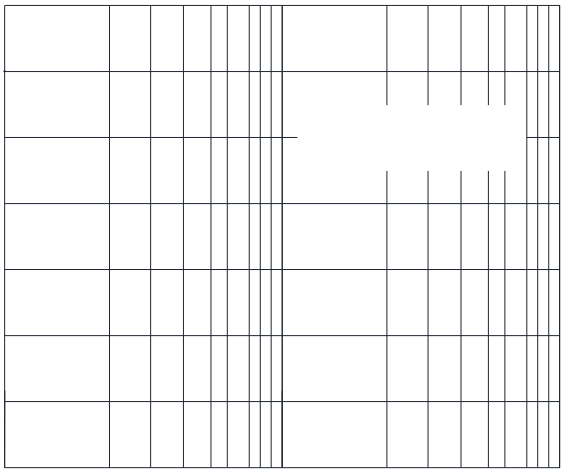



FIG.4: Typical Reverse Characteristics

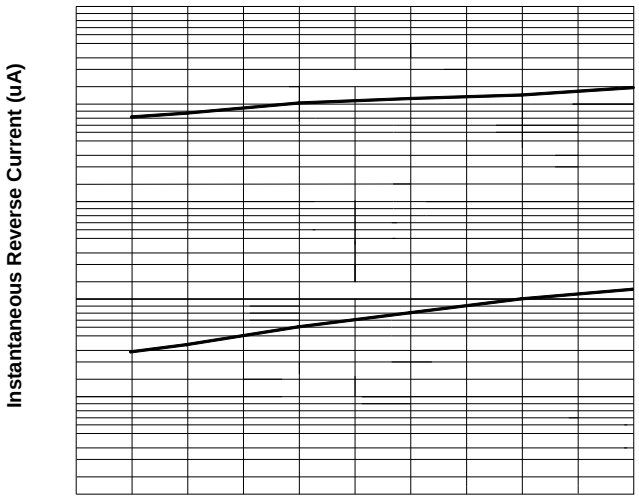

■ Outline Dimensions

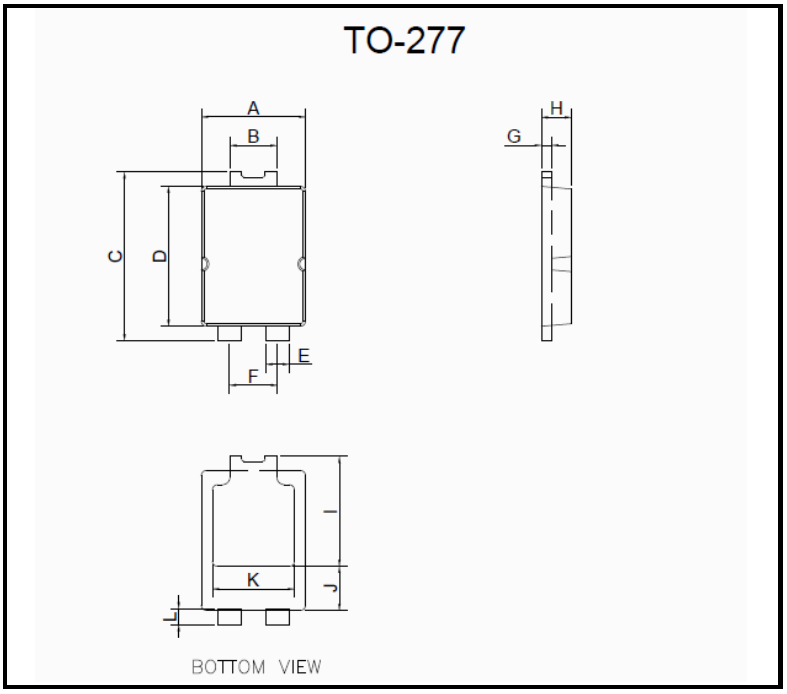

■ Suggested pad layout

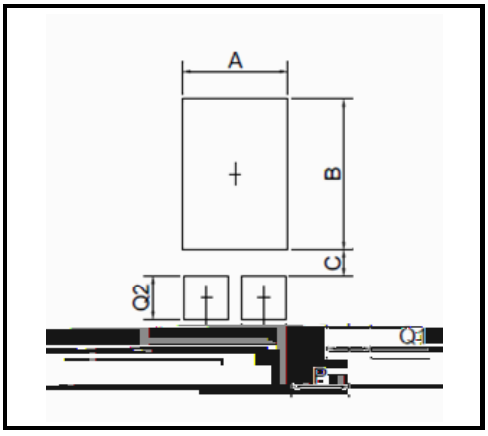

Disclaimer