
Surface Mount Super Fast Recovery Rectifier

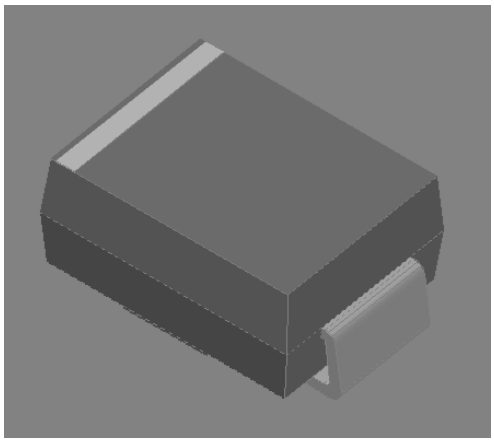


Features

- Low profile package
- Ideal for automated placement
- Glass passivated chip junction
- High forward surge capability
- Super Fast reverse recovery time
- Meets MSL level 1, per J-STD-020, LF maximum peak of 260 °C

Typical Applications

For use in high frequency rectification of power supplies, inverters, converters, and freewheeling diodes for consumer and telecommunication.



Mechanical Data

- **Package**: DO-214AA (SMB)
  Molding compound meets UL 94 V-0 flammability rating, RoHS-compliant, halogen-free
- **Terminals**: Tin plated leads, solderable per J-STD-002 and JESD22-B102
- **Polarity:** Cathode line denotes the cathode end

■Maximum Ratings (T_a=25 Unless otherwise specified

PARAMETER	SYMBOL	UNIT	UG3AB	UG3BB	UG3CB	UG3DB	UG3FB	UG3GB	UG3HB	UG3JB
Device marking code			UG3AB	UG3BB	UG3CB	UG3DB	UG3FB	UG3GB	UG3HB	UG3JB
Maximum Repetitive Peak Reverse Voltage	V_{RRM}	V	50	100	150	200	300	400	500	600
Maximum RMS Voltage	V_{RMS}	V	35	70	105	140	210	280	350	420
Maximum DC blocking Voltage	V_{DC}	V	50	100	150	200	300	400	500	600
Average rectified output current @60Hz sine wave, resistance load, TL (Fig.1)	I_O	A	3.0							
Forward Surge Current (Non-repetitive) @60Hz Half-sine wave,1 cycle, Tj=25	I_{FSM}	A	100							
Forward Surge Current (Non-repetitive) @1ms, square wave, 1 cycle, Tj=25			200							
Current squared time @1ms≤t≤8.3ms Tj=25	I^2t	A^2s	41.5							
Storage temperature	T_{stg}		-55 ~ +150							
Junction temperature	T_j		-55 ~ +150							

■Electrical Characteristics T_a=25 Unless otherwise specified

PARAMETER	SYMBOL	UNIT	TEST CONDITIONS	UG3AB	UG3BB	UG3CB	UG3DB	UG3FB	UG3GB	UG3HB	UG3JB
Maximum instantaneous forward voltage	V_F	V	I_{FM}=3.0A	0.92				1.25		1.7	
Maximum reverse recovery time	t_{rr}	ns	I_F=0.5A,I_R=1.0A, I_{rr}=0.25A	25						35	
Maximum DC reverse current at rated DC blocking voltage	IR	μA	Tj =25	5							
			Tj =125	50							
Typical junction capacitance	Cj	pF	Measured at 1MHz and Applied Reverse Voltage of 4.0 V.D.C	65				58		55	

■Dynamic Characteristics

UG3AB THRU UG3DB

PARAMETER	SYMBOL	UNIT	TEST CONDITIONS		Min	Typ	Max
Reverse Recovery Time	T_{RR}	ns	Tj=25	I_F=1A di/dt=-50A/us V_{RM}=30V	-	30	-
			Tj=25	I_F=3A di/dt=-200A/us V_{RM}=100V	-	29	-
			Tj=125		-	35	-
Peak recovery current	I_{RRM}	A	Tj=25		-	3.8	-
			Tj=125		-	6.5	-
Reverse recovery charge	Qrr	nC	Tj=25		-	39.9	-
			Tj=125		-	113.2	-
Non-repetitive avalanche energy	EAS	mJ	Tj=25	I_R=3.6 A L=15 mH	116.6	-	-

UG3FB THRU UG3GB

PARAMETER	SYMBOL	UNIT	TEST CONDITIONS		Min	Typ	Max
Reverse Recovery Time	T_{RR}	ns	Tj=25	I_F=1A di/dt=-50A/us V_{RM}=30V	-	29	-
			Tj=25	I_F=3A di/dt=-200A/us V_{RM}=200V	-	27	-
			Tj=125		-	41	-
Peak recovery current	I_{RRM}	A	Tj=25		-	3.2	-
			Tj=125		-	5.6	-
Reverse recovery charge	Qrr	nC	Tj=25		-	43.0	-
			Tj=125		-	114.9	-
Non-repetitive avalanche energy	EAS	mJ	Tj=25	I_R=0.7A L=15 mH	3.7	-	-

UG3HB THRU UG3JB

PARAMETER	SYMBOL	UNIT	TEST CONDITIONS		Min	Typ	Max
Reverse Recovery Time	T_{RR}	ns	Tj=25	I_F=1A di/dt=-50A/us V_{RM}=30V	-	39	-
			Tj=25	I_F=3A di/dt=-200A/us V_{RM}=400V	-	40	-
			Tj=125		-	62	-
Peak recovery current	I_{RRM}	A	Tj=25		-	4.8	-
			Tj=125		-	7.8	-
Reverse recovery charge	Qrr	nC	Tj=25		-	96.3	-
			Tj=125		-	241.4	-
Non-repetitive avalanche energy	EAS	mJ	Tj=25	I_R=0.9A L=15 mH	6.1	-	-

■Thermal Characteristics T_a=25 Unless otherwise specified

PARAMETER	SYMBOL	UNIT	UG3AB	UG3BB	UG3CB	UG3DB	UG3FB	UG3GB	UG3HB	UG3JB
Typical Thermal resistance	$R_{\theta J-A}$(1)	/W	65							
	$R_{\theta J-L}$(1)		20							
	$R_{\theta J-C}$(1)		18							

Note:
(1) Thermal resistance from junction to ambient and from junction to lead mounted on P.C.B. with 0.3" x 0.3" (8.0 mm x 8.0 mm) copper pad areas

■ Characteristics (Typical)

FIG.1: Io-TL Curve

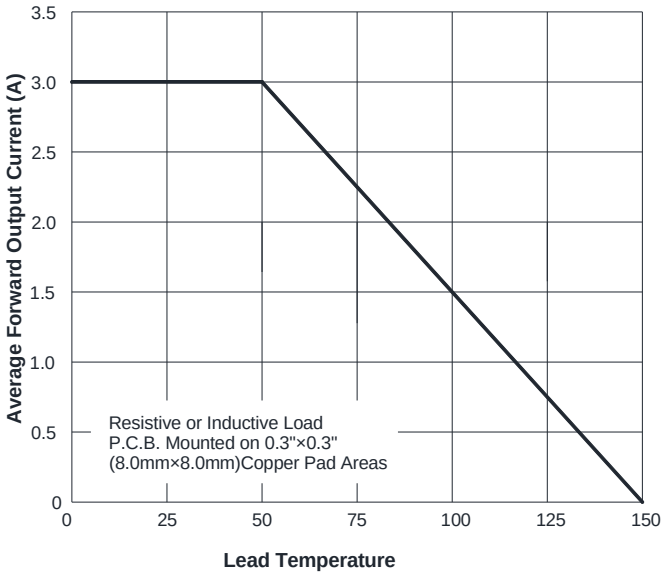


FIG.2: Forward Surge Current Capadility


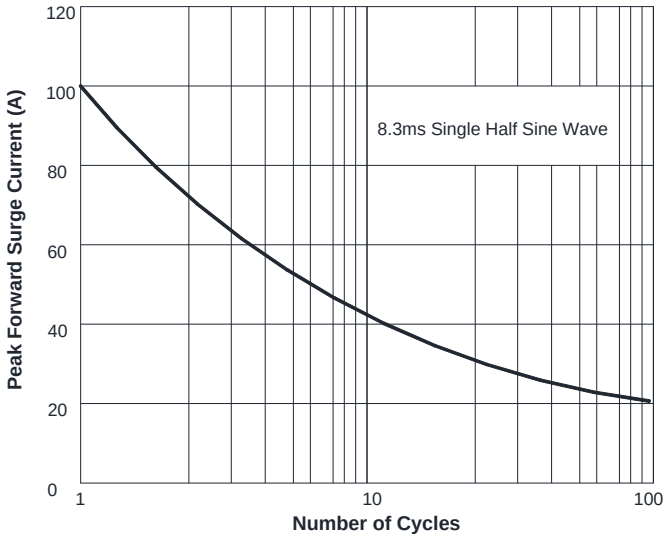


FIG.4: Typical Reverse Characteristics

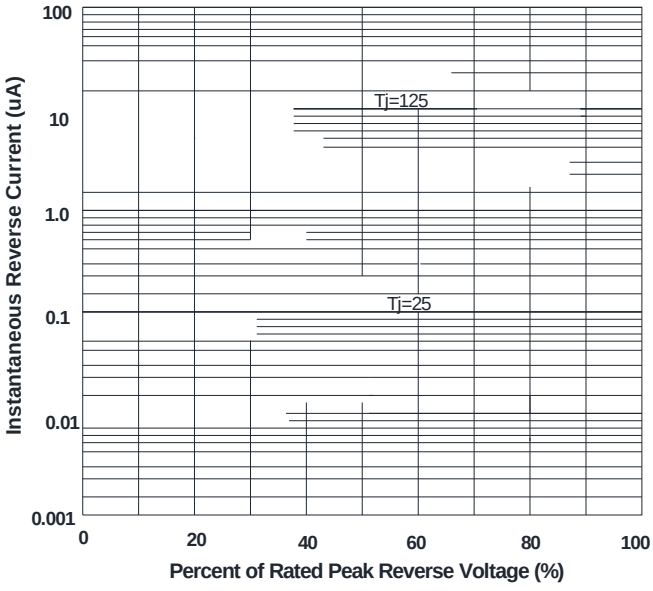


■**Ordering Information** (Example)

PREFERED P/N	PACKING CODE	UNIT WEIGHT(g)	MINIMUM PACKAGE(pcs)	INNER BOX QUANTITY(pcs)	OUTER CARTON QUANTITY(pcs)	DELIVERY MODE
UG3AB-UG3JB	F1	Approximate 0.096	3000	/	48000	13” reel
UG3AB-UG3JB	F2	Approximate 0.096	750	6000	24000	7” reel
UG3AB-UG3JB	F3	Approximate 0.096	500	4000	16000	7” reel

■ **Outline Dimensions**

	DO-214AA(SMB)
Dim	

■ **Suggested pad layout**

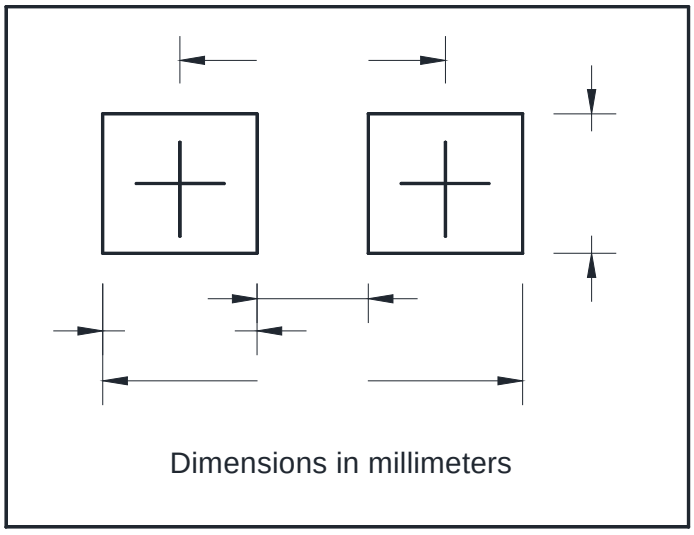

DO-214AA(SMB)	
Dim	Millimeters
P1	6.8
P2	4.3
P3	1.8
Q1	2.5
Q2	2.3

Disclaimer

The information presented in this document is for reference only. Yangzhou Yangjie Electronic Technology Co., Ltd. reserves the right to make changes without notice for the specification of the products displayed herein to improve reliability, function or design or otherwise.

The product listed herein is designed to be used with ordinary electronic equipment or devices, and not designed to be used with equipment M th M l t t ¾¾ 0- M