Bridge Rectifiers

Features

Typical Applications

ABSK22S THRU ABSK210S

Thermal Characteristics Ä Å

PARAMETER		SYMBOL	UNIT	ABSK22S	ABSK24S	ABSK26S	ABSK28S	ABSK210S

Ordering Information (Example)

PREFERED P/N	PACKING CODE	UNIT WEIGHT(g)	MINIIMUM PACKAGE(pcs)	INNER BOX QUANTITY(pcs)	OUTER CARTON QUANTITY(pcs)	DELIVERY MODE

Characteristics (Typical)

FIG1:Io-Ta Curve

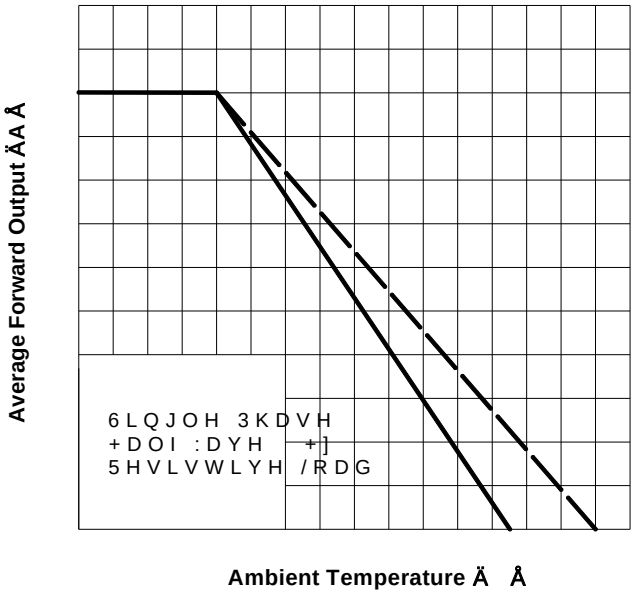


FIG2:Surge Forward Current Capability

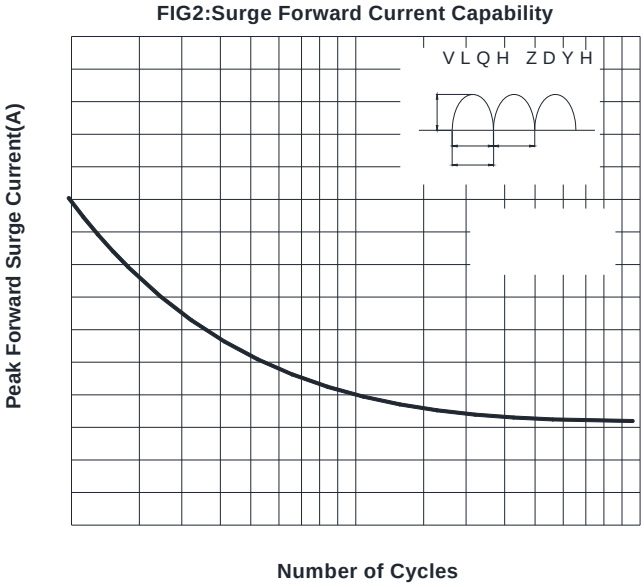


FIG3: Forward Voltage


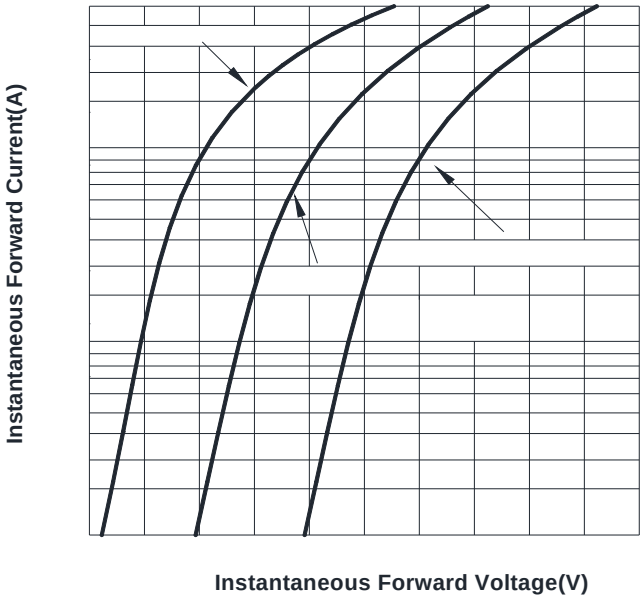


FIG4:Typical Reverse Characteristics

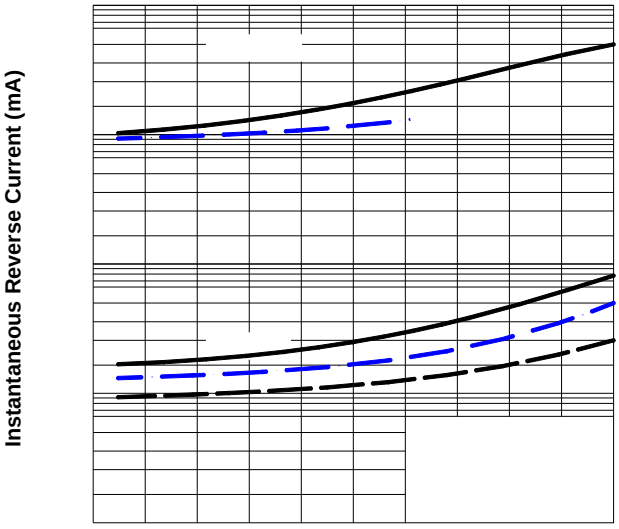

Outline Dimensions

ABS		

■ **Suggested pad layout**

Dim	Min

Disclaimer