
GBJL1506 THRU GBJL1508


RoHS
COMPLIANT

Low VF Bridge Rectifiers



Features

Typical Applications



Mechanical Data

Package

Terminals

Polarity:

Maximum Ratings

PARAMETER				
Average rectified output current @60H z sine wave, R-load	With heatsink T_C = 110			

GBJL1506 THRU GBJL1508

FIG3: Typical Forward Voltage


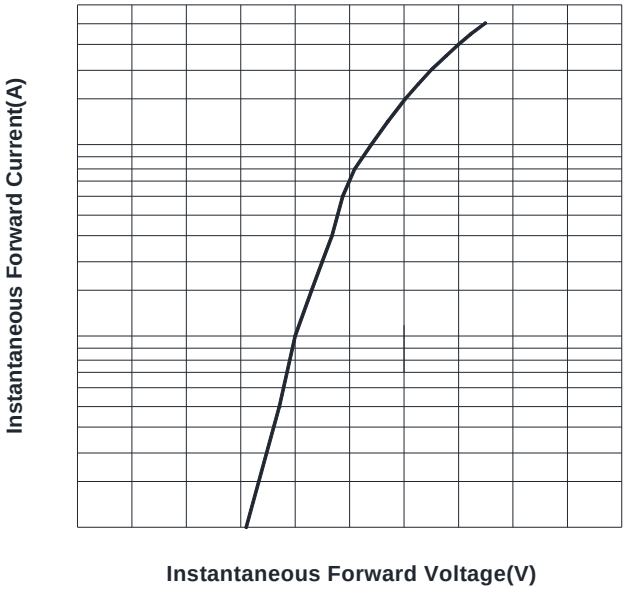


FIG4:Typical Reverse Characteristics

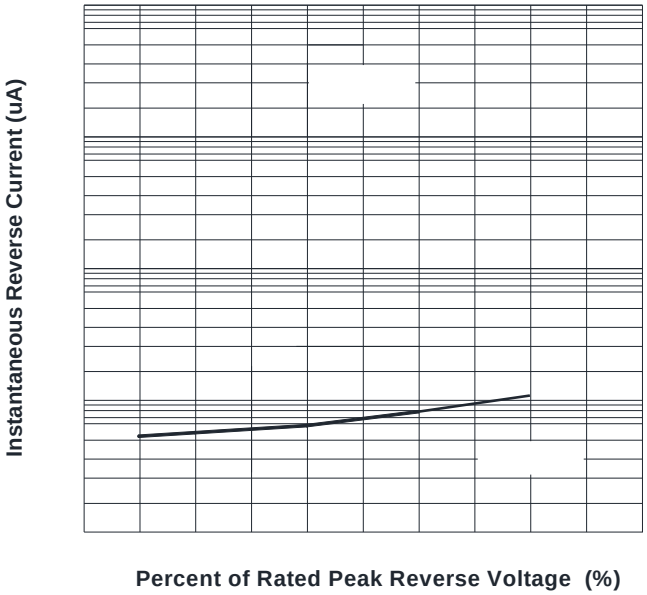

Outline Dimensions

6KBJ		

Disclaimer