

GBJL2006

RoHS
COMPLIANT

Low VF Bridge Rectifiers





Features

Typical Applications

Mechanical Data

Package

Terminals

Polarity:

Maximum Ratings

GBJL2006

Electrical Characteristics

PARAMETER	SYMBOL	UNIT	TEST CONDITIONS	GBJL2006

Thermal Characteristics

PARAMETER		SYMBOL	UNIT	GBJL2006

Ordering Information

PREFERED P/N	PACKING CODE	UNIT WEIGHT(g)	MINIIMUM PACKAGE(pcs)	INNER BOX QUANTITY(pcs)	OUTER CARTON QUANTITY(pcs)	DELIVERY MODE

Characteristics

FIG1:Io-Tc Curve

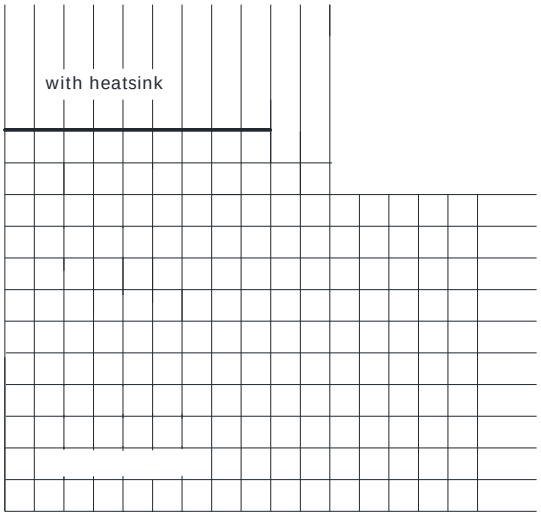


FIG2:Surge Forward Current Capability

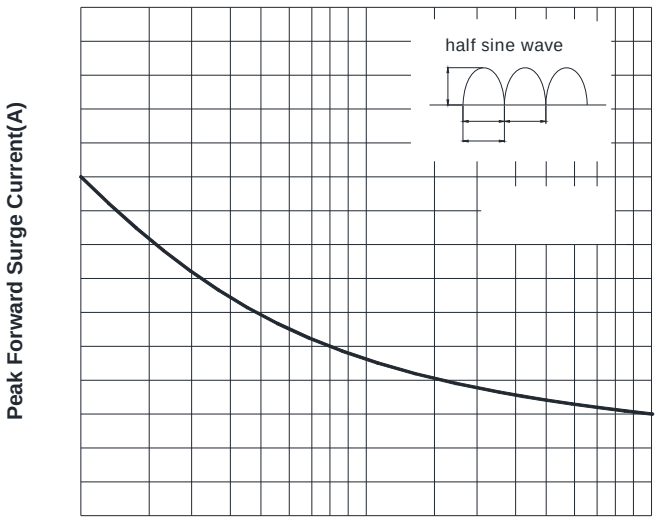


FIG3: Typical Forward Voltage


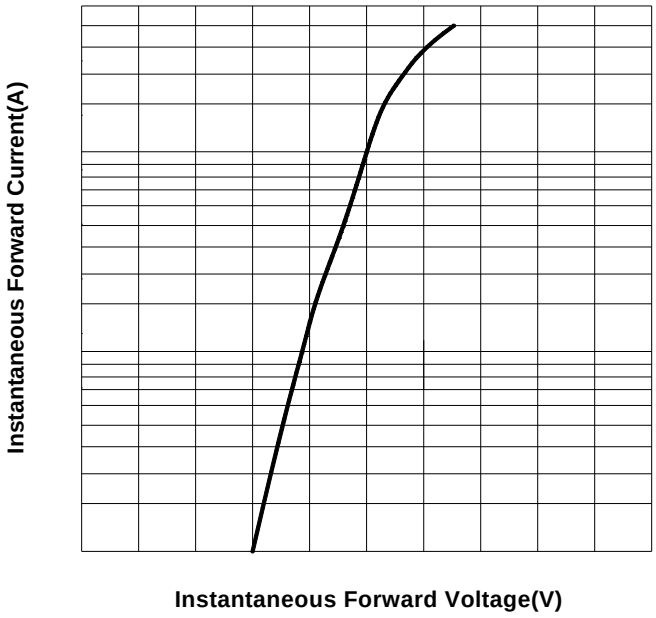


FIG4:Typical Reverse Characteristics

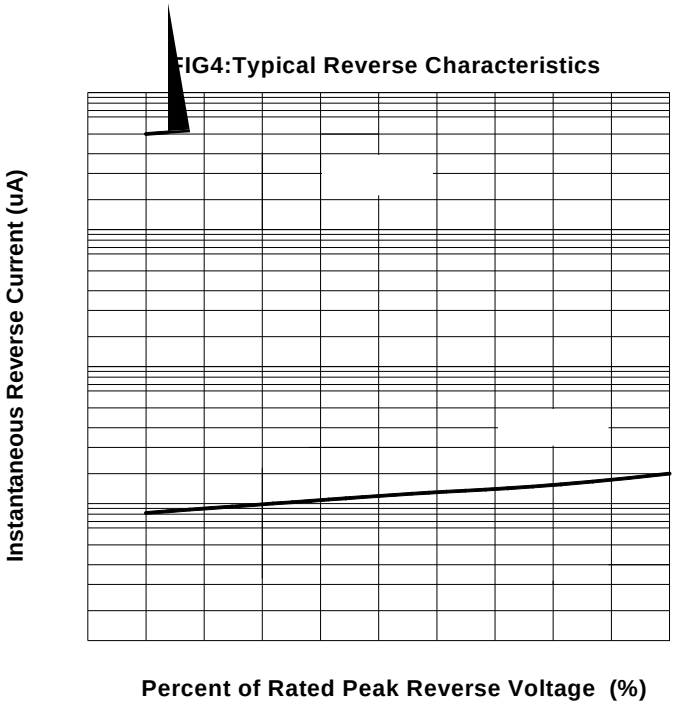

Outline Dimensions

6KBJ		

Disclaimer