
Low VF Bridge Rectifiers





Features

- UL recognition, file #E230084
- based on silicon planar process
- Low VF
- Thin single in-line package
- High surge current capability
- Solder dip 275 °C max. 7 s, per JESD 22-B106

Typical Applications

General purpose use in AC/DC bridge full wave rectification for switching power supply, home appliances, office equipment, industrial automation applications.

Mechanical Data

- **Package**: 6KBJ
  Molding compound meets UL 94 V-0 flammability rating, RoHS-compliant
- **Terminals**: Tin plated leads, solderable per J-STD-002 and JESD22-B102
- **Polarity:** As marked on body

■Maximum Ratings (T_a=25 Unless otherwise specified

PARAMETER		SYMBOL	UNIT	GBJU1506
Device marking code				GBJU1506
Maximum Repetitive Peak Reverse Voltage		V_{RRM}	V	600
Maximum RMS Voltage		V_{RMS}	V	420
Maximum DC blocking Voltage		V_{DC}	V	600
Average rectified output current @60Hz sine wave, R-load	With heatsink Tc =128	I_O	A	15.0
	Without heatsink Ta =25			3.2
Forward Surge Current (Non-repetitive) @60Hz Half-sine wave,1 cycle, Tj=25		I_{FSM}	A	250
Forward Surge Current (Non-repetitive) @1ms, square wave, 1 cycle, Tj=25				500
Current squared time @1ms≤t≤8.3ms Tj=25 , Rating of per diode		I^2t	A^2S	259.4
Storage temperature		T_{stg}		-55 ~ +150
Junction temperature		T_j		-55 ~ +150
Dielectric strength @ Terminals to case, AC 1 minute		V_{dis}	KV	2.5
Mounting torque @Recommend torque 5kg cm		Tor	kg cm	8

■Electrical Characteristics T_a=25 Unless otherwise specified

PARAMETER	SYMBOL	UNIT	TEST CONDITIONS	Min	Typ	Max
Instantaneous forward voltage drop per diode	V_F	V	I_{FM}=7.5A	0.80	0.875	0.92
DC reverse current at rated DC blocking voltage per diode	I_R	μA	T_j=25	-	0.001	5
			T_j=125	-	-	50
Junction capacitance	Cj	pF	Measured at 1MHz and Applied Reverse Voltage of 4.0 V.D.C	69	137	274

■Thermal Characteristics T_a=25 Unless otherwise specified

PARAMETER		SYMBOL	UNIT	GBJU1506
Typical Thermal Resistance	Between junction and ambient, Without heatsink	$R_{\theta J-A}$	/W	18.0
	Between junction and case, With heatsink	$R_{\theta J-C}$		0.8
	Between junction and Lead With heatsink	$R_{\theta J-L}$		5.0

Note: Device mounted on 75mm x 45mm x 5.5mm Aluminum Plate Heatsink.

■Ordering Information (Example)

PREFERED P/N	PACKING CODE	UNIT WEIGHT(g)	MINIIMUM PACKAGE(pcs)	INNER BOX QUANTITY(pcs)	OUTER CARTON QUANTITY(pcs)	DELIVERY MODE
GBJU1506	B1	Approximate 6.5	15	750	1500	TUBE

■ Characteristics(Typical)

FIG1:Io-Tc Curve

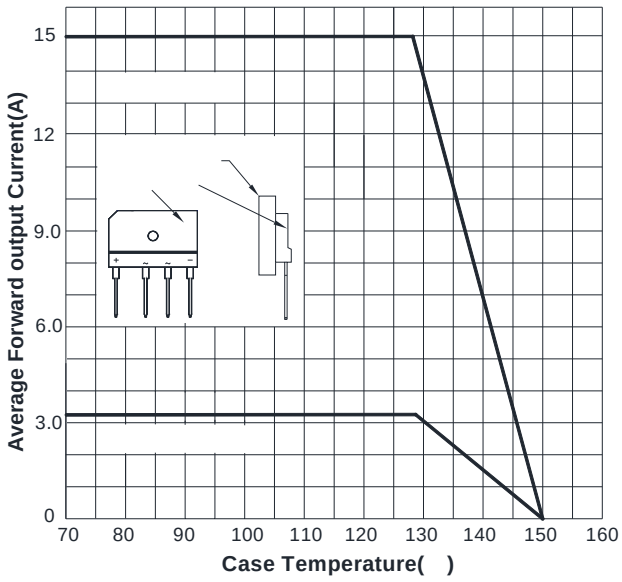


FIG2:Surge Forward Current Capability

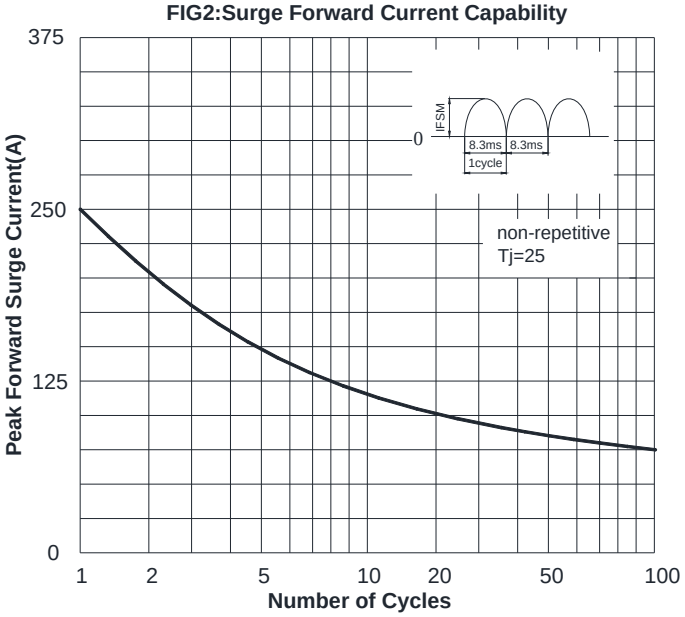


FIG3: Typical Forward Voltage



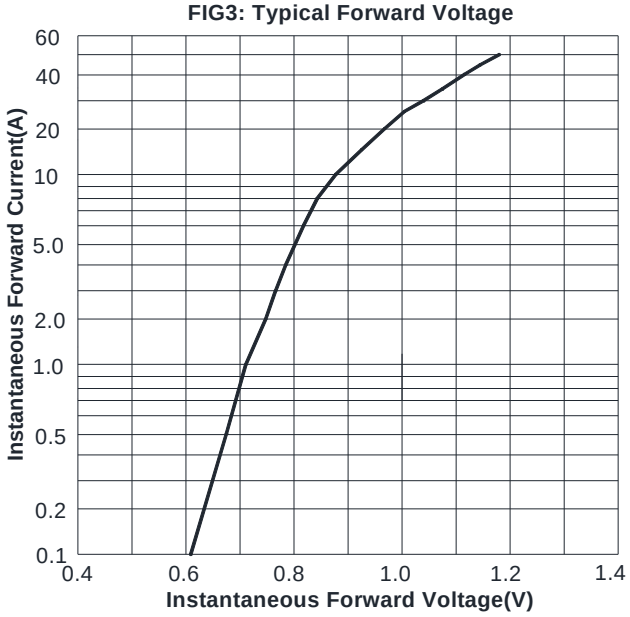


FIG4:Typical Reverse Characteristics

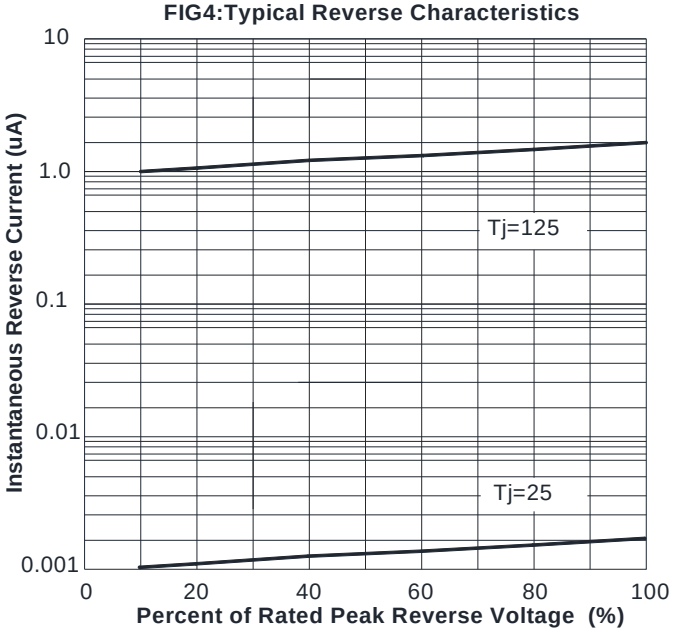

■ Outline Dimensions

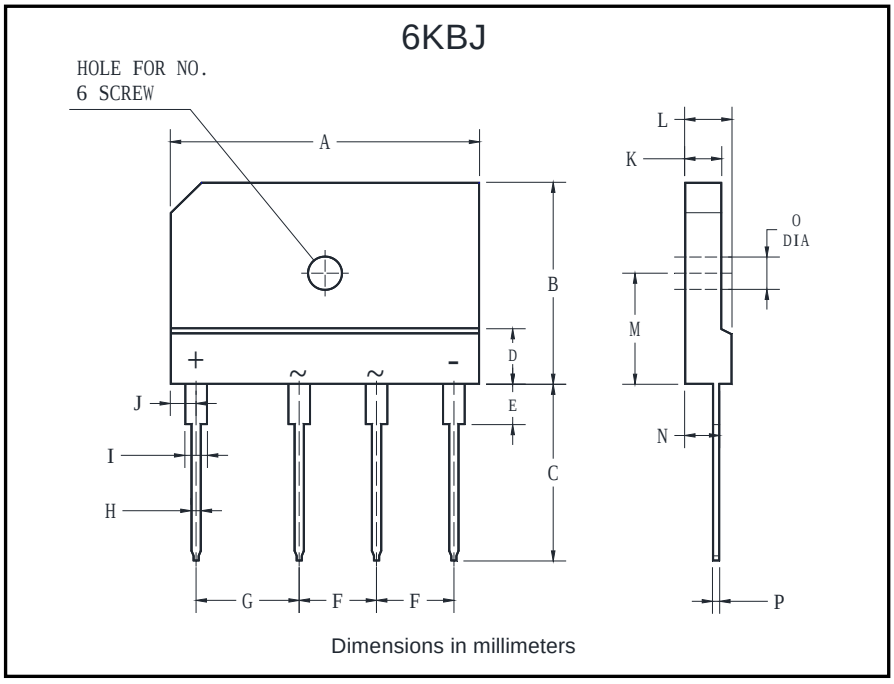

6KBJ		
Dim	Min	Max
A	29.7	30.3
B	19.7	20.3
C	17.0	18.0
D	4.8	5.8
E	3.8	4.2
F	7.3	7.7
G	9.8	10.2
H	0.9	1.1
I	2.0	2.4
J	2.3	2.7
K	3.4	3.8
L	4.4	4.8
M	10.8	11.2
N	3.1	3.7
O	3.1	3.4
P	0.6	0.8

Disclaimer

The information presented in this document is for reference only. Yangzhou Yangjie Electronic Technology Co., Ltd. reserves the right to make changes without notice for the specification of the products displayed herein to improve reliability, function or design or otherwise.

The product listed herein is designed to be used with ordinary electronic equipment or devices, and not designed to be used with