
Bridge Rectifiers

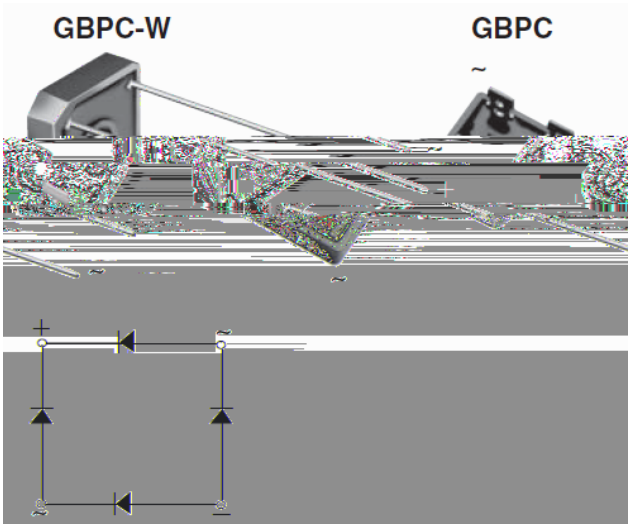

Features

- UL recognition, file #E230084
- Universal 3-way terminals snap-on wire wrap-around or PCB mounting
- Glass passivated chip junction
- High surge current capability
- Low thermal resistance
- Solder dip 275 °C max. 7 s, per JESD 22-B106

Typical Applications

General purpose use in AC/DC bridge full wave rectification for power supply, home appliances, office equipment, industrial automation applications.

Mechanical Data

- **Package**: GBPC GBPC-W
  Molding compound meets UL 94 V-0 flammability rating, RoHS-compliant
- **Terminals**: Tin plated leads, solderable per J-STD-002 and JESD22-B102
- Suffix letter “W” added to indicate wire leads(e.g. GBPC3510W).

■Maximum Ratings (T_a=25 Unless otherwise specified

PARAMETER	SYMBOL	UNIT	GBPC3501	GBPC3502	GBPC3504	GBPC3506	GBPC3508	GBPC3510	GBPC3512
Device marking code			GBPC3501	GBPC3502	GBPC3504	GBPC3506	GBPC3508	GBPC3510	GBPC3512
Maximum Repetitive Peak Reverse Voltage	V_{RRM}	V	100	200	400	600	800	1000	1200
Maximum RMS Voltage	V_{RMS}	V	70	140	280	420	560	700	840
Maximum DC blocking Voltage	V_{DC}	V	100	200	400	600	800	1000	1200
Average rectified output current @60Hz sine wave, R-load, T_C =60	I_O	A	35						
Forward Surge Current (Non-repetitive) @8.3ms, Half-sine wave,1 cycle, Tj=25	I_{FSM}	A	450						
Forward Surge Current (Non-repetitive) @1ms, square wave, 1 cycle, Tj=25			900						
Current squared time @1ms≤t≤8.3ms Tj=25 , Rating of per diode	I^2t	A^2S	841						
Storage temperature	Tstg		-55 ~ +150						
Junction temperature	Tj		-55 ~ +150						
Dielectric strength @ Terminals to case, AC 1 minute	Vdis	KV	2.5						
Mounting torque @Recommend torque 5kg cm	Tor	kg cm	8						

■Electrical Characteristics T_a=25 Unless otherwise specified

PARAMETER	SYMBOL	UNIT	TEST CONDITIONS	GBPC3501	GBPC3502	GBPC3504	GBPC3506	GBPC3508	GBPC3510	GBPC3512
Maximum instantaneous forward voltage drop per diode	V_F	V	I_{FM}=17.5A	1.1						
Maximum DC reverse current at rated DC blocking voltage per diode	I_R	μA	T_j =25	5						
			T_j =125	100						
Typical junction capacitance	Cj	pF	Measured at 1MHz and Applied Reverse Voltage of 4.0 V.D.C	145						

■Thermal Characteristics T_a=25 Unless otherwise specified


PARAMETER		SYMBOL	UNIT	GBPC3501	GBPC3502	GBPC3504	GBPC3506	GBPC3508	GBPC3510	GBPC3512
Thermal Resistance	Between junction and case, With heatsink	$R_{\theta J-C}$	/W	1.35						

Note: Device mounted on 75mm x 45mm x 5.5mm Aluminum Plate Heatsink.

■Ordering Information (Example)

PREFERED P/N	PACKAGE CODE	UNIT WEIGHT (g)	MINIMUM PACKAGE(pcs)	INNER BOX QUANTITY(pcs)	OUTER CARTON QUANTITY(pcs)	DELIVERY MODE
GBPC3501 ~ GBPC3512	A1	Approximate 13.8	50	50	500	Paper Box
GBPC3501W ~ GBPC3512W	A1	Approximate 13	50	50	500	Paper Box

■ Characteristics (Typical)

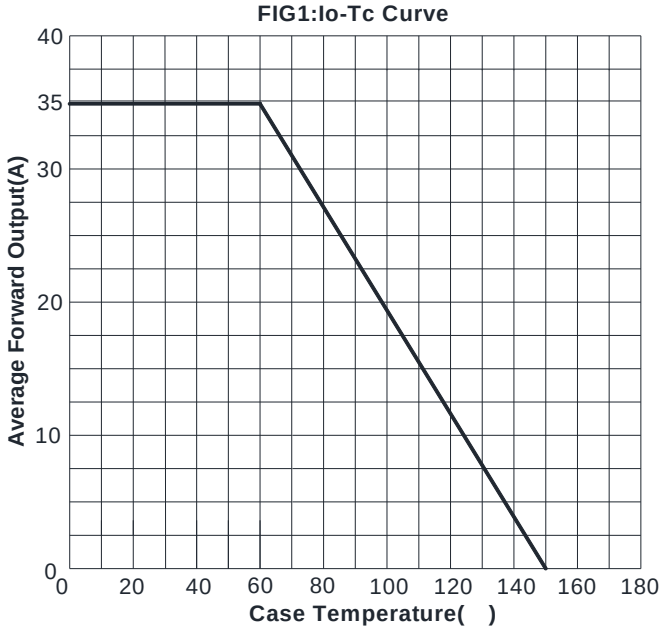

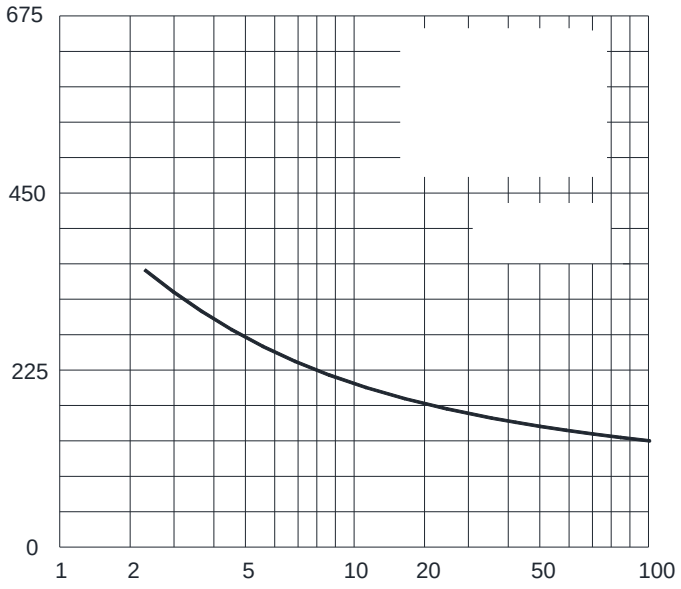


FIG3: Typical Forward Voltage


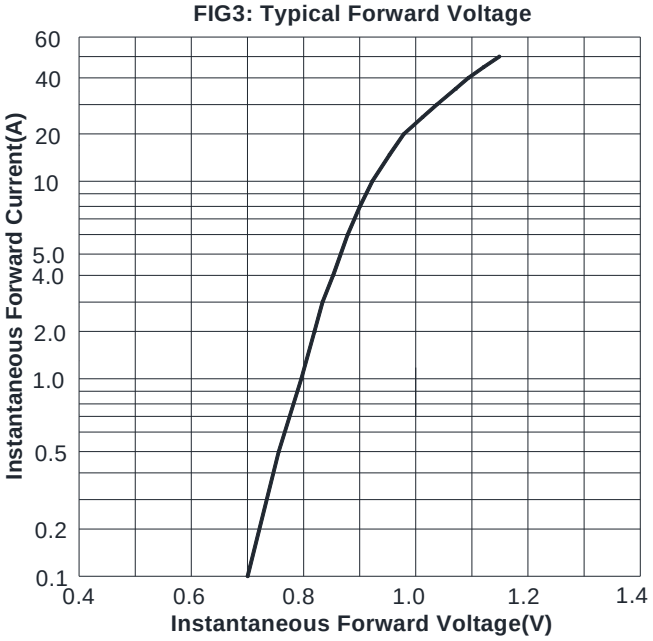


FIG4:Typical Reverse Characteristics

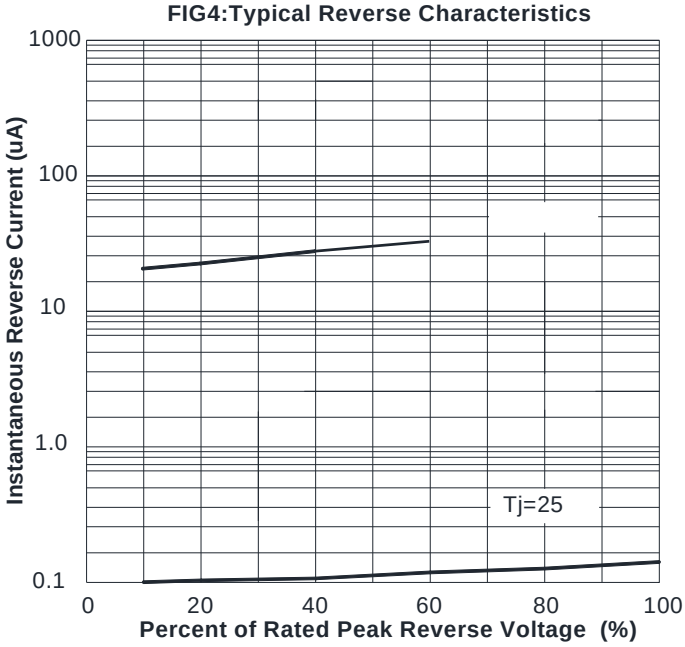

■ Outline Dimensions

GBPC-W		
Dim	**Min**	**Max**
A	28.2	28.8
B	17.1	19.1
C	10.4	12.4
D	0.95	1.05
E	7.6	8.2
F	30	/
G	4.5	5.5

GBPC		
Dim	**Min**	**Max**
A	28.2	28.8
B	15.3	17.3
C	17.1	19.1
D	13.2	15.2
E	0.75	0.85
F	6.2	6.4
G	2.4	2.6
H	7.6	8.2
I	19	/
J	4.5	5.5