
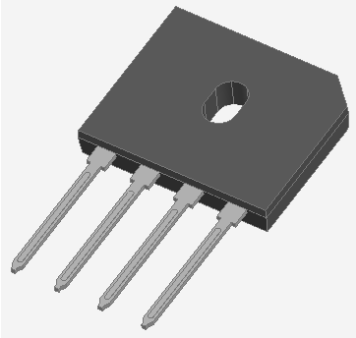




Bridge Rectifiers

Features

- UL recognition, file #E230084
- Glass passivated chip junction
- Ideal for printed circuit boards
- High surge current capability
- Solder dip 275 °C max. 7 s, per JESD 22-B106

Typical Applications

General purpose use in AC/DC bridge full wave rectification for monitor, TV, printer, power supply, switching mode power supply, adapter, audio equipment, and home appliances applications.

Mechanical Data

- **Package**: GBU
  Molding compound meets UL 94 V-0 flammability rating, RoHS-compliant
- **Terminals**: Tin plated leads, solderable per J-STD-002 and JESD22-B102
- **Polarity:** As marked on body

■Maximum Ratings (T_a=25 Unless otherwise specified

PARAMETER		SYMBOL	UNIT	GBU4005	GBU401	GBU402	GBU404	GBU406	GBU408	GBU410
Device marking code				GBU4005	GBU401	GBU402	GBU404	GBU406	GBU408	GBU410
Maximum Repetitive Peak Reverse Voltage		V_{RRM}	V	50	100	200	400	600	800	1000
Maximum RMS Voltage		V_{RMS}	V	35	70	140	280	420	560	700
Maximum DC blocking Voltage		V_{DC}	V	50	100	200	400	600	800	1000
Average rectified output current @60Hz sine wave, R-load	With heatsink Tc =135℃	I_O	A	4.0						
	Without heatsink Ta =25℃			2.3						
Forward Surge Current (Non-repetitive) @60Hz Half-sine wave,1 cycle, Tj=25℃		I_{FSM}	A	135						
Forward Surge Current (Non-repetitive) @1ms, square wave, 1 cycle, Tj=25℃				270						
Current squared time @1ms≤t≤8.3ms Tj=25℃, Rating of per diode		I^2t	A^2S	75.6						
Storage temperature		T_{stg}	℃	-55 ~ +150						
Junction temperature		T_j	℃	-55 ~ +150						
Dielectric strength @ Terminals to case, AC 1 minute		Vdis	KV	2.5						
Mounting torque @Recommend torque 5kg cm		Tor	kg cm	8						

■**Electrical Characteristics** T_a

FIG3: Typical Forward Voltage


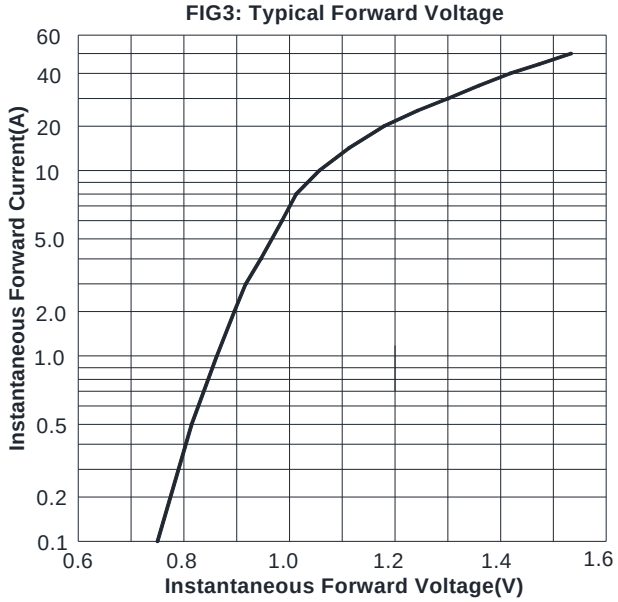


FIG4:Typical Reverse Characteristics

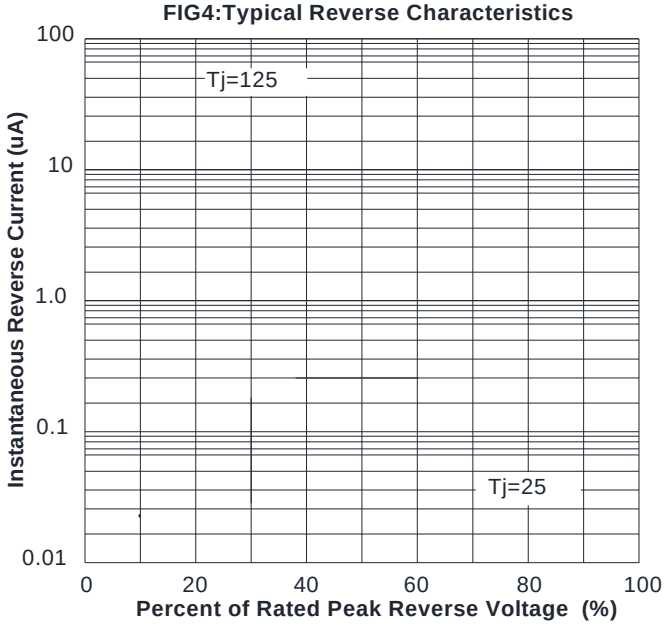

■ Outline Dimensions

GBU		
Dim	Min	Max
A	21.80	22.30
B	18.30	18.80
C	17.50	18.00
D	3.30	3.90
E	7.10	7.50
F	5.50	5.90
G	1.91	2.54
H	2.06	2.54
I	1.02	1.27
J	4.83	5.33
K	3.30	3.56
L	2.40	2.66
M	0.46	0.56

Disclaimer

The information presented in this document is for reference onl l' Q Ẉ