

KBJ10005A THRU KBJ1010A

RoHS COMPLIANT

Bridge Rectifiers

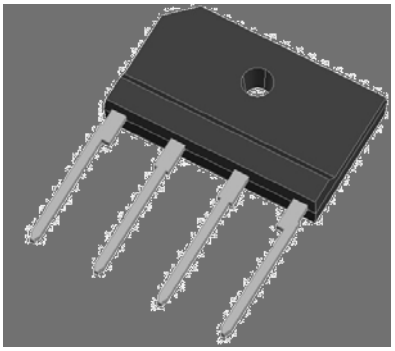



Features

Typical Applications

Mechanical Data

Package

Terminals

Polarity:

Maximum Ratings

PARAMETER	SYMBOL	UNIT	KBJ10005A	KBJ1001A	KBJ1002A	KBJ1004A	KBJ1006A	KBJ1008A	KBJ1010A

Electrical Characteristics

PARAMETER	SYMBOL	UNIT	TEST CONDITIONS	KBJ10005A	KBJ1001A	KBJ1002A	KBJ1004A	KBJ1006A	KBJ1008A	KBJ1010A

KBJ10005A THRU KBJ1010A

Thermal Characteristics

PARAMETER		SYMBOL	UNIT	KBJ10005A	KBJ1001A	KBJ1002A	KBJ1004A	KBJ1006A	KBJ1008A	KBJ1010A

Ordering Information

PREFERED P/N	PACKAGE CODE	UNIT WEIGHT(g)	MINIIMUM PACKAGE(pcs)	INNER BOX QUANTITY(pcs)	OUTER CARTON QUANTITY(pcs)	DELIVERY MODE

Characteristics

FIG1:Io-Tc Curve

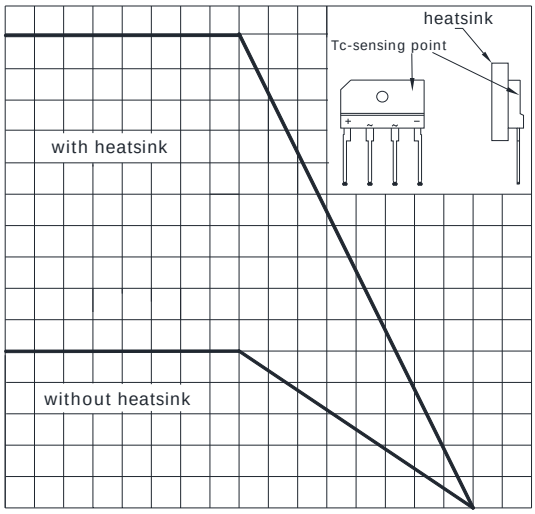


FIG2:Surge Forward Current Capability

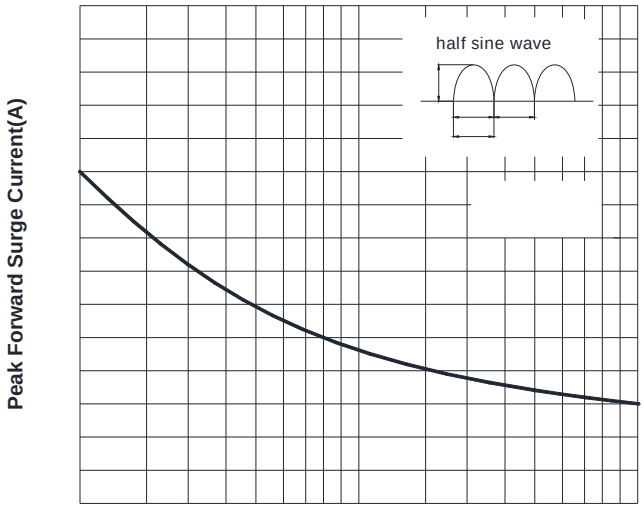


FIG3: Typical Forward Voltage



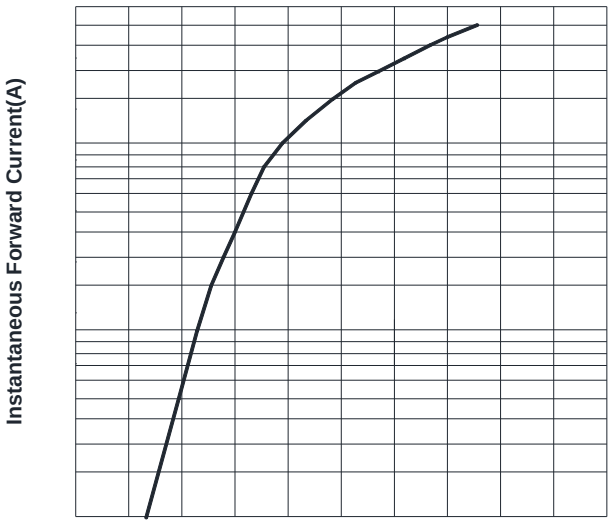


FIG4:Typical Reverse Characteristics

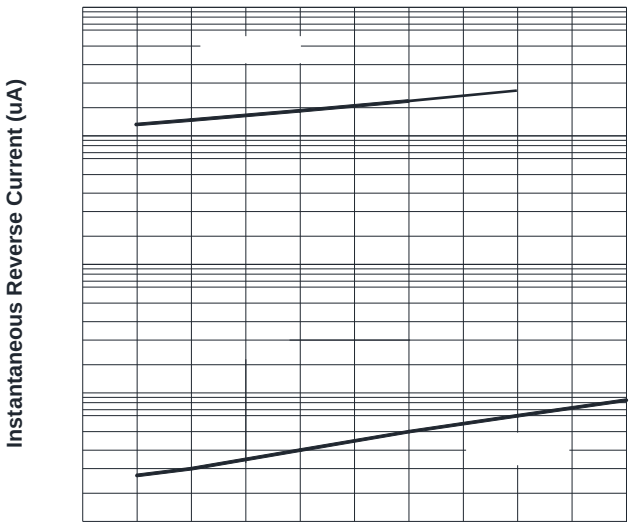

Outline Dimensions

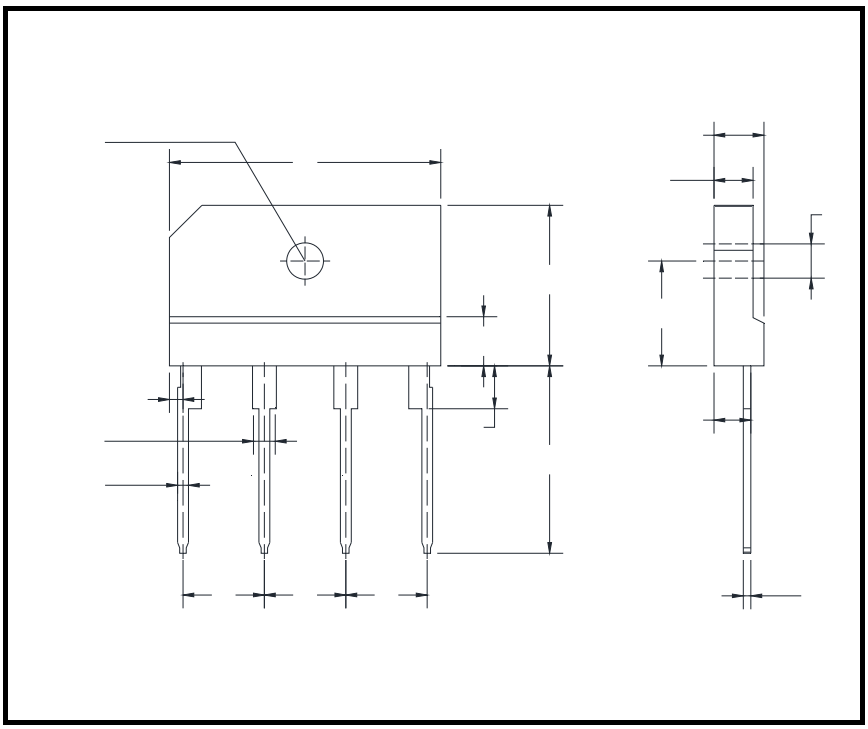

4KBJ		

Disclaimer