

Three Phase Bridge Rectifiers

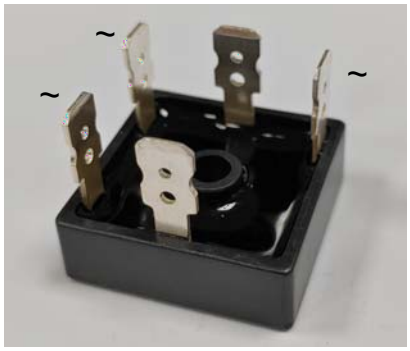

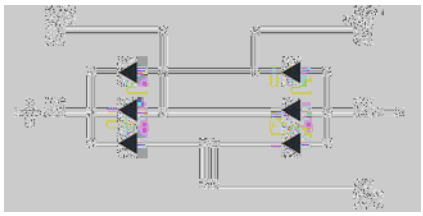

Features

Typical Applications

Server Frequency converter Industrial power supply.

Mechanical Data

Package

Terminals

Polarity:

Maximum Ratings

PARAMETER	SYMBOL	UNIT	MT5016D

Electrical Characteristics

PARAMETER	SYMBOL	UNIT	TEST CONDITIONS	MT5016D

Thermal Characteristics

PARAMETER		SYMBOL	UNIT	MT5016D

Ordering Information

PREFERED P/N	PACKING CODE	UNIT WEIGHT(g)	MINIIMUM PACKAGE(pcs)	INNER BOX QUANTITY(pcs)	OUTER CARTON QUANTITY(pcs)	DELIVERY MODE
MT5016D						

Characteristics

FIG1:Io-Tc Curve

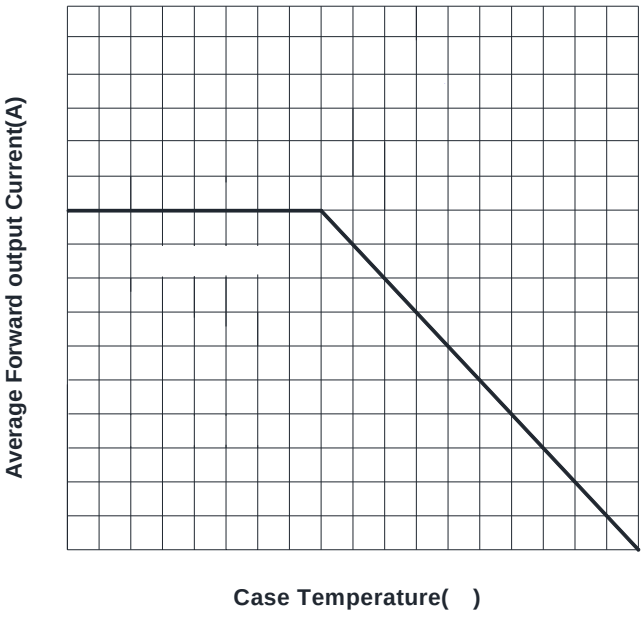


FIG2:Surge Forward Current Capability

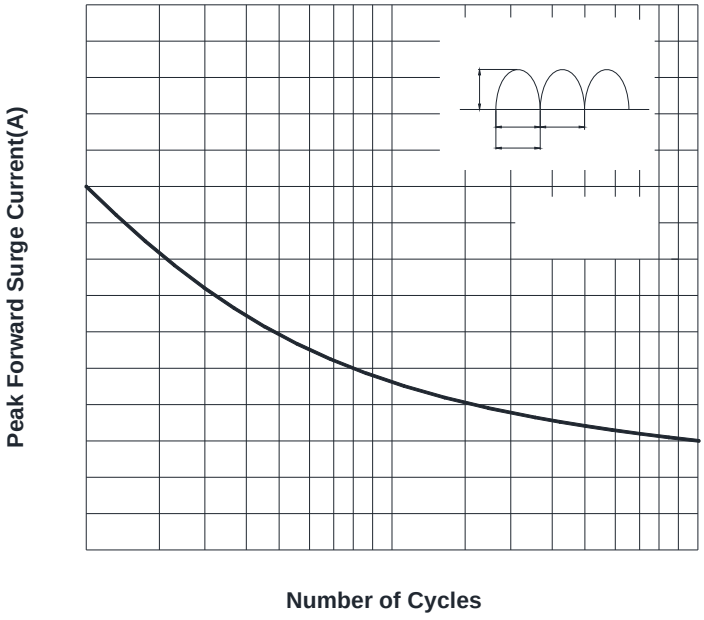


FIG3: Typical Forward Voltage



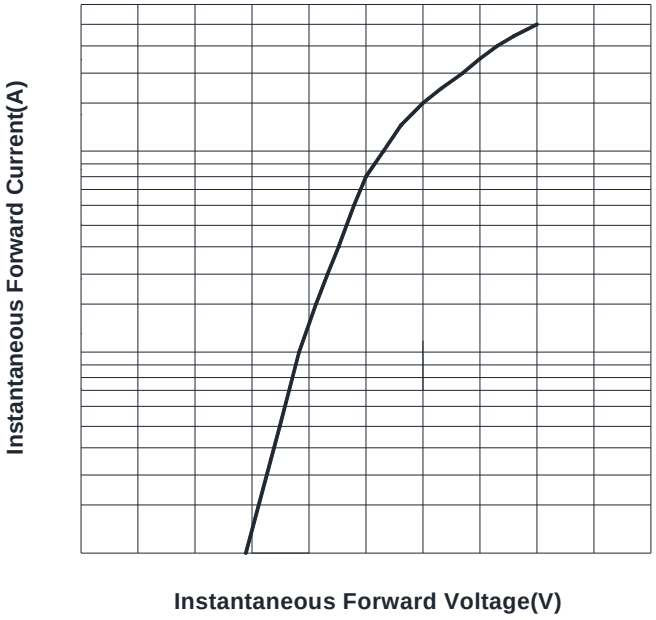


FIG4:Typical Reverse Characteristics

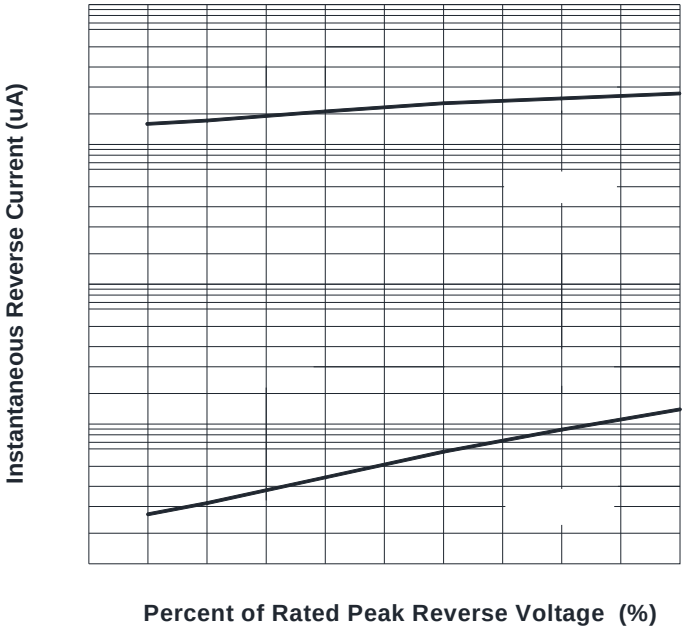

Outline Dimensions

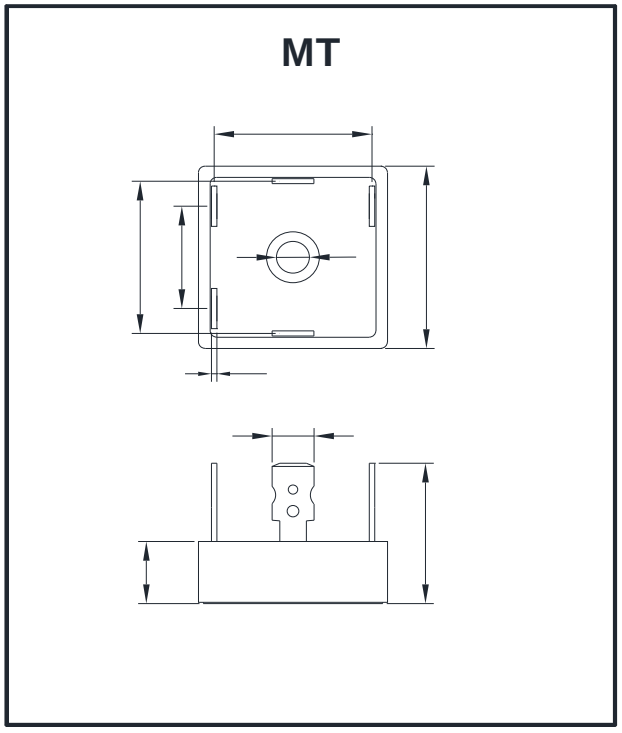

MT		
Dim	Min	Max

Disclaimer